


## Peripheral connections



- Contents**
- 1x Linux All-in-One touch computer
  - 1x US power cable
  - 1x EU power cable
  - 1x AC-DC Power Adapter
  - 2x Cable cover security screws
  - 2x Tie-Wraps (for cable retention)

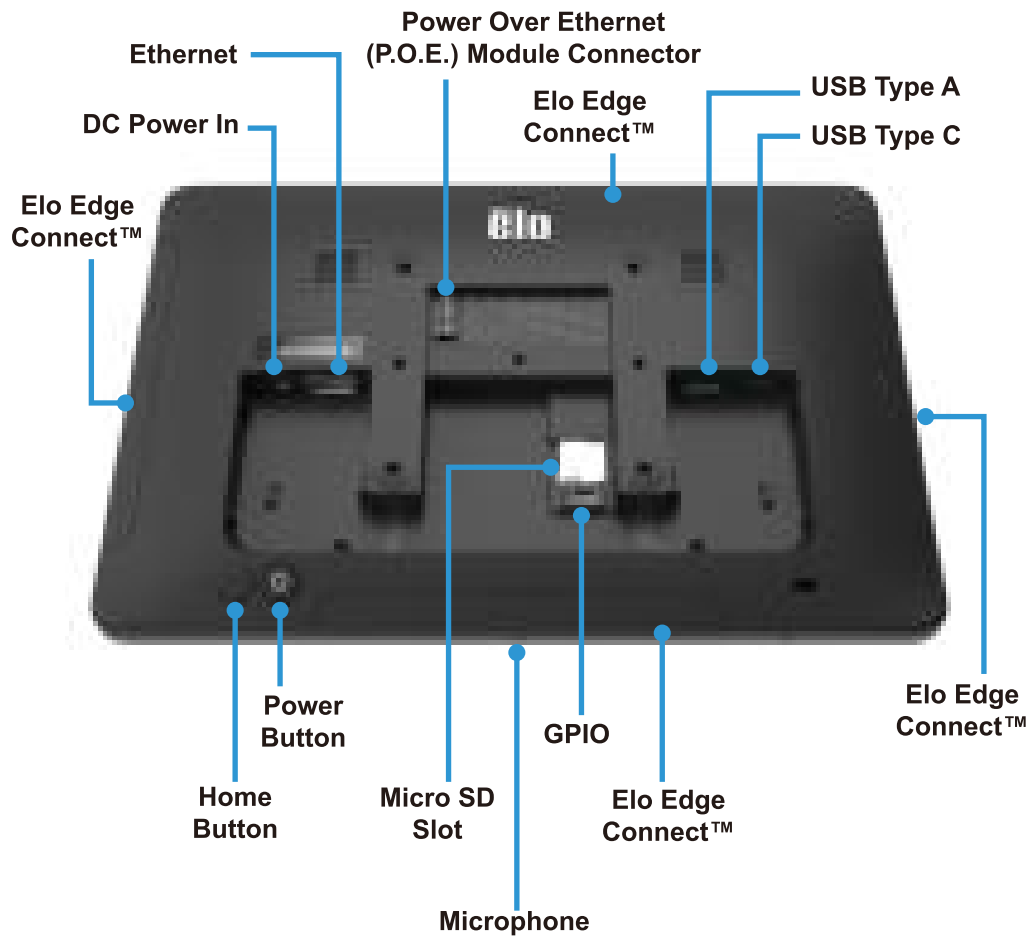

## Quick Installation Guide

### I-Series 4 Linux All-In-One

Revision A  
P/N E275179

**Elo Touch Solutions Technical Support**  
Online self-help: [www.elotouch.com/support](http://www.elotouch.com/support)

**America**  
800-ELO-TOUCH  
Tel +1 408 597 8000  
[EloSales.NA@elotouch.com](mailto:EloSales.NA@elotouch.com)

**Asia-Pacific**  
Tel +86 (21) 3329 1385  
[EloAsia@elotouch.com](mailto:EloAsia@elotouch.com)

**Europe(EMEA)**  
Tel +32 16 930 136  
[EMEA.Sales@elotouch.com](mailto:EMEA.Sales@elotouch.com)

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo and the Elo logo are either trademarks or registered trademarks of Elo Touch Solutions, Inc.




Go to [www.elotouch.com/support](http://www.elotouch.com/support) to download user manual.

1




Remove the left side cable cover by lifting upward

2

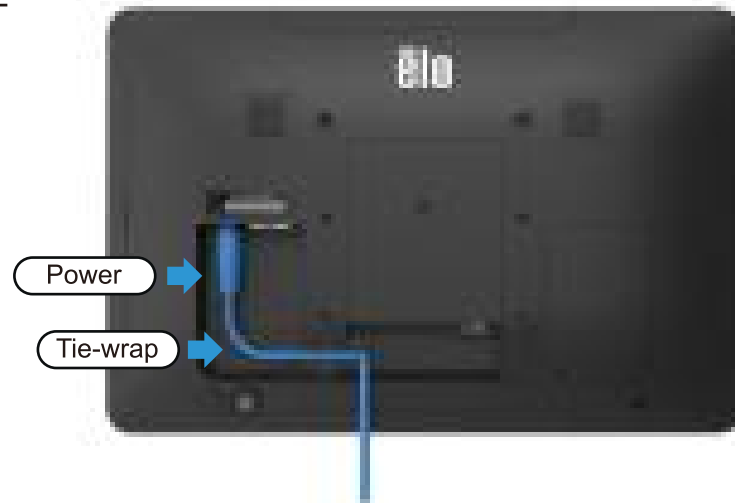

Connect the power cable. The system will power on automatically when plugged in. A tie-wrap (included) can be used to secure the power cable from accidental removal.

3

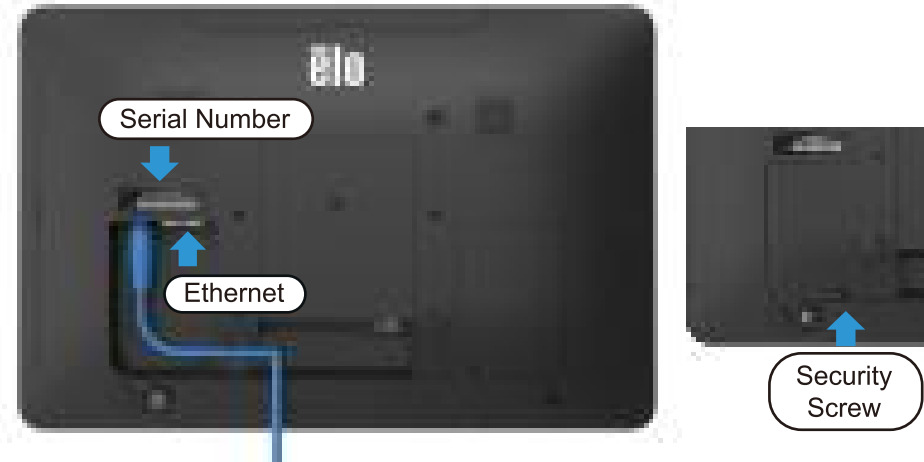

Connect an Ethernet cable now (or setup WiFi later). Once all cables are connected, reinstall the cable over and secure with included security screw.