



## NE1000G M White ATX 3.0

UNLEASH THE POWER.

Introducing our NE1000G M White ATX 3.0 power supply, designed with the ultimate performance and stability in mind for the gaming and enthusiast market. With advanced features like ATX 3.0 and high-quality JP capacitors, unparalleled stability, and 80 PLUS® Gold-certified efficiency, you can expect peak performance from your system. The PhaseWave™ Design ensures steady power output, while the FDB Silent Fan offers quiet cooling. The power supply is also 100% Modular, allowing for easy cable management and customization. The Zero RPM Manager enables advanced thermal control, ensuring the optimal balance between silent operation and efficient cooling. The CircuitShield™ suite of industrial-grade protections provides safe and reliable power delivery in any environment. The NE1000G M White ATX 3.0 is the perfect choice for building a reliable and efficient PC system for gamers and professionals alike.



### ATX 3.0 & PCIe 5.0 COMPATIBLE

Our new NEO M ATX 3.0 Series power supplies meet the high standards of the ATX 3.0 standard for reliability and power efficiency, which are formally certified by ATX 3.0.org, assuring the highest level of quality and performance.

The included PCIe 5.0 12VHPWR OEM cable enables seamless compatibility with modern graphics cards, such as the NVIDIA GeForce RTX™ 40 Series.

### RELIABILITY



#### HIGH-QUALITY JP CAPACITORS

Equipped with high-quality JP capacitors, our power supplies achieve unprecedented tight voltage regulation and minimal ripple and noise, maximizing your system's performance.


**LONGER LIFE**



#### PHASEWAVE™ DESIGN

Introducing our PhaseWave™ Design, a server-class LLC design featuring synchronous rectification based on a DC-DC topology. This design ensures unparalleled power delivery efficiency and stability for your system.

### CIRCUITSHIELD™

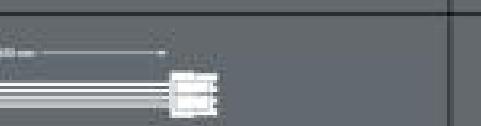

The full suite of industrial-grade protections ensuring the safety and reliability of your power supply in any situation.

### 10-YEAR WARRANTY

The new PSU line from Antec pushes the standard for excellence with the circuit shield suite of industrial protections and is backed by a 10-year warranty.

### FAN FUNCTION



#### ZERO RPM MANAGER

With the Zero RPM fan mode, our PSU ensures a longer lifespan and quieter operation. The thermal sensors activate the fan only when necessary, providing optimal cooling while minimizing noise levels.




#### 120MM FDB SILENT FAN

The whisper-quiet, 120mm fluid-dynamic bearing (FDB) fan provides high airflow with the durability and longevity that is a signature of Antec quality.



### SYSTEM BUILD & CABLE MANAGEMENT

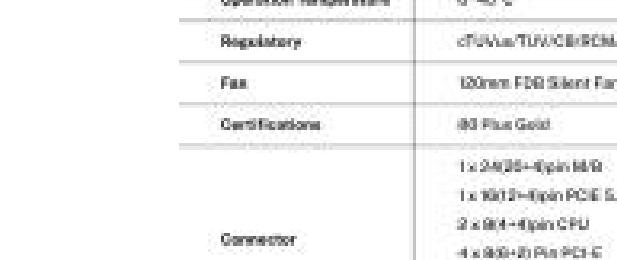

### FULL MODULAR CABLE MANAGEMENT

Allows users to use only the necessary cables and eliminates excess cables that can obstruct and reduce airflow for improved cooling performance.

#### COMPACT SIZE

Compared to typical power supplies on the market, it is smaller in size and can be used with a wider range of computer cases.



### CABLES

Qty	Cable Length	Cable Type	Connector(s) per Cable
1	~30cm	24-pin EPS	1
1	~30cm	16+4-pin PCIe 5.0	1
3	~30cm	8+4-pin CPU	1
4	~30cm	6+2-pin PCIe	1
3	~30cm	SATA	4
1	~30cm	Molex	4

### CONNECTORS



x1

x1

x2

x4

x12

x4

### INPUT

100-240V~, 50Hz-60Hz, 12A-6A

### OUTPUT

+3.3V	+5V	+12V	-12V	+5VSB
20A	20A	83A	0.3A	3.0A
120W	996W	3.6W	15W	
	1000W			

### SPECIFICATIONS

Model	NE1000G M White ATX 3.0
Type	ATX 12V 3.0
Dimension	140x125x80mm (WxDxH)
Modular	Full Modular
Warranty	10 years
Input Voltage	100V-240V
Input Current	12A-6A
Input Frequency Range	50Hz-60Hz
PFC	Active PFC
Power Good Signal	100-150ms
Protection	OCP, OUV, OLP, OCP, OLP, ISL, MLO
Output Capacity	1000W
Operation Temperature	0-40°C
Regulatory	CE/UL/C-Tick/IC/CCC/ROHS/MSDS/REACH/ODG
Fan	120mm FDB Silent Fan
Certifications	80 Plus Gold
Connectors	1x 24-pin EPS, 1x 16+4-pin PCIe 5.0, 3x 8+4-pin CPU, 4x 6+2-pin PCIe, 3x SATA, 1x Molex
Net Weight	1.84 Kgs
Gross Weight	4.84 Kgs
UPCs	0-281045-11788-3 NE1000G M White ATX 3.0 0-281045-11789-0 NE1000G M White ATX 3.0 CC 0-281045-11780-6 NE1000G M White ATX 3.0 SB 0-281045-11781-3 NE1000G M White ATX 3.0 IP

### CABLES

Qty	Cable Length	Cable Type	Connector(s) per Cable
1	~30cm	24-pin EPS	1
1	~30cm	16+4-pin PCIe 5.0	1
3	~30cm	8+4-pin CPU	1
4	~30cm	6+2-pin PCIe	1
3	~30cm	SATA	4
1	~30cm	Molex	4

### CONNECTORS



x1

x1

x2

x4

x12

x4

### INPUT

100-240V~, 50Hz-60Hz, 12A-6A

### OUTPUT

+3.3V	+5V	+12V	-12V	+5VSB
20A	20A	83A	0.3A	3.0A
120W	996W	3.6W	15W	
	1000W			

### SPECIFICATIONS

Model	NE1000G M White ATX 3.0
Type	ATX 12V 3.0
Dimension	140x125x80mm (WxDxH)
Modular	Full Modular
Warranty	10 years
Input Voltage	100V-240V
Input Current	12A-6A
Input Frequency Range	50Hz-60Hz
PFC	Active PFC
Power Good Signal	100-150ms
Protection	OCP, OUV, OLP, OCP, OLP, ISL, MLO
Output Capacity	1000W
Operation Temperature	0-40°C
Regulatory	CE/UL/C-Tick/IC/CCC/ROHS/MSDS/REACH/ODG
Fan	120mm FDB Silent Fan
Certifications	80 Plus Gold
Connectors	1x 24-pin EPS, 1x 16+4-pin PCIe 5.0, 3x 8+4-pin CPU, 4x 6+2-pin PCIe, 3x SATA, 1x Molex
Net Weight	1.84 Kgs
Gross Weight	4.84 Kgs
UPCs	0-281045-11788-3 NE1000G M White ATX 3.0 0-281045-11789-0 NE1000G M White ATX 3.0 CC 0-281045-11790-6 NE1000G M White ATX 3.0 SB 0-281045-11791-3 NE1000G M White ATX 3.0 IP