



300W

IDEAL APPLICATIONS

Mini and media PC systems Systems with low installation depth Classic office and web applications

HIGHLIGHTS

80 PLUS® Gold / Bronze efficiency (up to 91.7 / 88.3%) Up to two strong dual 12V-rails Compact and space-saving design Sleeved or flat black cables for convenient usage

be quiet!°

Compact And Silent Energy

TFX Power 3 300W: the upgraded be quiet! high-efficiency PSU for mini and media PCs with great features at a reasonable price.

Highlights »

- Certified 80 PLUS Gold and Bronze efficiency (up to 91.7%)
- High stability and PCle graphics card support
- 300W of continuous power
- High-quality temperature-controlled 80mm fan for low-noise operation
- Sleeved or flat black cables up to 60cm long
- Meets the latest safety and efficiency requirements
- Standby draw less than 0.17 watts
- Three-year manufacturer's warranty
- Product conception, design and quality control in Germany







TFX POWER 3

Techni	ical Data »			
	Model	300W Gold	300W Bronze	
	Article no.	BN323	BN322	
	EAN Code	4260052188293	4260052188286	
_	Voltage (Vac) / Frequency (Hz)	100 - 240 / 50 - 60	100 - 240 / 50 - 60	
	Dimensions (L x W x H)	175 x 85 x 65	175 x 85 x 65	
	TFX 12V 2.52 / EPS 12V 2.92	v/v	√ /√	
	Wire-free (DC-side)	-	-	
	Silence-optimized be quiet! fan (mm)	80	80	
IERA	Noise level (dB(A)) at 20 / 50 / 100% load	9.7 / 12.4 / 21.7	14.6 / 15.4 / 29.1	
IN GENERAL	12V rail (Multi-Rail) / 12V Single Rail	2/-	-/ •	
2	Overclocking Key / Jumper	-/-	-/-	
	Power Good signal	100-150ms	100-150ms	
	PFC	active	active	
	Certification / Efficiency (%) at 230V	80 PLUS [®] Gold / 91.7%	80 PLUS [®] Bronze / 88.3%	
	Energy Star 7.0 compatible	•	✓	
	ErP ready / Power in stand-by (W)	√ / <0.17	√ / <0.14	
	OCP, OVP, UVP, SCP, OPP, OTP	•	→	
	Lifetime of PSU at 25°C (h)	100,000	100,000	
ES	No. of cables	5	5	
	Maximum cable length (cm)	60	60	
	Length of ATX-connection cable (cm)	35	35	
CABLES	Cable management	Fixed	Fixed	
	Sleeved cables	20+4 pin	20+4 pin	
	Flat cables	PCIe, drives, P4	PCIe, drives, P4	
CONNECTORS	ATX motherboard (20+4-pin)	•	·	
	PCI express (6+2-pin)	1	1	
	P8-/P4-connector	-/1	-/1	
NNE	SATA	3	3	
8	PATA	2	2	
	FDD (Floppy)	1	1	

Output Data »	
---------------	--


	Power	300W					
300W Gold	Max. Combined	103W		288W		3.6W	15W
300W Gold		IOA	IOA	24A		0.34	SA
	Max. Current	18A	18A	13A	13A	0.3A	3A
DC Output		3.3V	5V	12V1	12V2	-12V	5VsB
AC Input		100-240Vac 50-60Hz 6-2.5A					

AC Input			100-24	40Vac 50-60Hz	5-2A		
DC Output		3.3V	5V	12V1	-12V	5VsB	
	Max. Current	16A	16A	25A	0.3A	2.5A	
300W Bronze				25A			
300W Bronze	Max. Combined	85W		300W	3.6W	12.5W	
	Power	300W					




TFX POWER 3

WHO MERCANDER AND REPORT AND ADMINISTRATION OF BUILDING

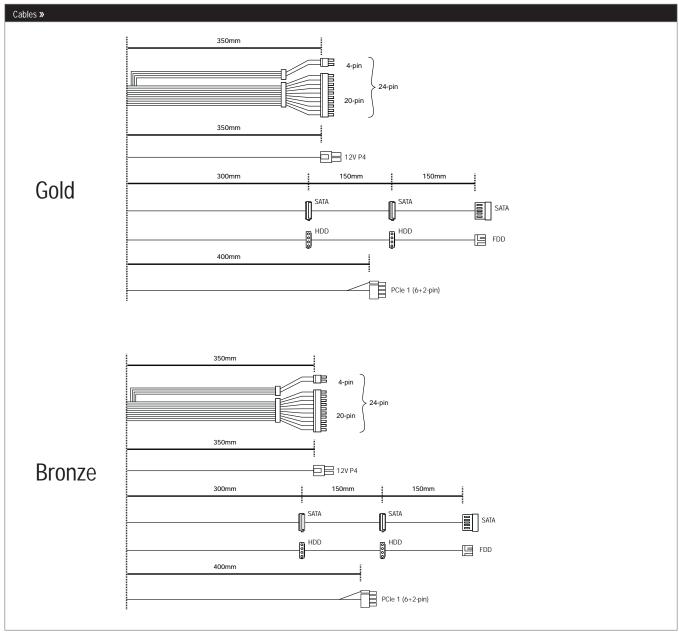

Logistics	Logistics data »					
Region	Model	Article no	EAN code			
EU	TFX Power 3 300W Gold	BN323	4260052188293			
EU	TFX Power 3 300W Bronze	BN322	4260052188286			





Contact »		
be quiet! Headquarters	Service hotline: +49 40 7367 686 44	
Listan GmbH Wilhelm-Bergner-Straße 11c 21509 Glinde Germany	e-mail: service@bequiet.com	
	Visit the contact section on bequiet.com the right regional service information.	
	the right regional service information.	