



## Lindy 4 Port USB 3.2 Type C Hub with On/Off Switches

**Brand :** Lindy

**Product code:** 43383

**Product name :** 4 Port USB 3.2 Type C Hub with On/Off Switches



4 Port USB 3.2 Type C Hub with On/Off Switches

[Lindy 4 Port USB 3.2 Type C Hub with On/Off Switches:](#)

The Lindy 4 Port USB 3.2 type C Hub provides convenient access and effective power management for USB Type A peripherals and storage devices. Capable of data transfer speeds of up to 5Gbps, the hub is also backwards compatible with USB 2.0 and 1.1.

The hubs individual On/Off switching ports can help reduce overall power consumption and are perfect for accessing external hard drives or other periodically used devices. An optional power supply can be connected for use with high current USB devices.




Information about USB 3.0, 3.1 and 3.2

USB 3.0, USB 3.1 and USB 3.2 PCs, cables and devices are all compatible with each other, when using either a USB Type A or USB Type C host interface.

USB 3.0, USB 3.1 Gen 1 and USB 3.2 Gen 1 all support data transfer rates up to 5 Gbps.

USB 3.1 Gen 2 and USB 3.2 Gen 2 both support data transfer rates up to 10 Gbps.

Ports & interfaces		Packaging data	
Host interface *	USB 3.2 Gen 1 (3.1 Gen 1) Type-C	Quantity per pack	1 pc(s)
Hub interfaces *	USB 3.2 Gen 1 (3.1 Gen 1) Type-A	Package width	174 mm
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	4	Package depth	194 mm
Ports quantity *	4	Package height	15 mm
<b>Features</b>		Package weight	60 g
Data transfer rate *	5000 Mbit/s	Package type	Polybag
Product colour	Grey	<b>Packaging content</b>	
Housing material	Acrylonitrile butadiene styrene (ABS), Aluminium, Polycarbonate (PC)	Manual	✓
Cable type	Round cable	<b>Operational conditions</b>	
Cable length	0.3 m	Maximum operating temperature	50 °C
Certification	CE, FCC, RoHS & REACH, CP65	Operating temperature (T-T)	0 - 50 °C
<b>Power</b>		Storage temperature (T-T)	0 - 60 °C
Power supply type	USB	Operating relative humidity (H-H)	0 - 85%
<b>Weight &amp; dimensions</b>		<b>Sustainability</b>	
Width	100 mm	Sustainability compliance	✓
Depth	30 mm	<b>Technical details</b>	
Height	9 mm	Compliance certificates	CE, Federal Communications Commission (FCC), REACH, RoHS
Weight	42 g		

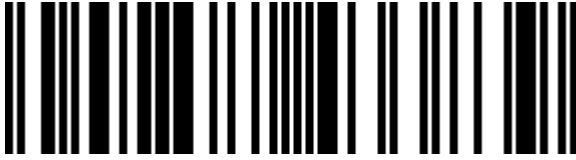

4002888433839

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 31-OCT-2024. Prints or copies of Information are only valid on the printed Publication date