



Lindy 4 Port USB 3.0 Hub

Brand : Lindy

Product code: 43324

Product name : 4 Port USB 3.0 Hub

4 Port USB 3.0 Hub

[Lindy 4 Port USB 3.0 Hub:](#)

The Lindy 4 Port USB 3.0 Hub provides 4 USB Type A SuperSpeed ports for connecting USB peripherals to a USB Type A equipped computer. Capable of data transfer speeds of up to 5Gbps, the hub is also backwards compatible with USB 2.0 and 1.1.

The hub is powered by the USB Bus, while its functional, stylish design with integrated cable make it the perfect companion for mobile devices. With 'Plug and Play' installation, no drivers are required, therefore this hub can be installed with minimum difficulty, ideal for both professional and first time users.

Information about USB 3.0, 3.1 and 3.2


USB 3.0, USB 3.1 and USB 3.2 PCs, cables and devices are all compatible with each other, when using either a USB Type A or USB Type C host interface.

USB 3.0, USB 3.1 Gen 1 and USB 3.2 Gen 1 all support data transfer rates up to 5 Gbps.

USB 3.1 Gen 2 and USB 3.2 Gen 2 both support data transfer rates up to 10 Gbps.



| Ports & interfaces | | Weight & dimensions | |
|---|----------------------------------|-----------------------------------|-------------|
| Host interface * | USB 3.2 Gen 1 (3.1 Gen 1) Type-A | Height | 18 mm |
| Hub interfaces * | USB 3.2 Gen 1 (3.1 Gen 1) Type-A | Weight | 60 g |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 4 | Packaging data | |
| Ports quantity * | 4 | Package width | 174 mm |
| Features | | Package depth | 20 mm |
| Data transfer rate * | 5000 Mbit/s | Package height | 194 mm |
| Product colour | Black | Package weight | 70 g |
| Housing material | Aluminium, Plastic | Operational conditions | |
| Cable length | 0.3 m | Operating temperature (T-T) | 10 - 40 °C |
| Power | | Storage temperature (T-T) | -20 - 60 °C |
| Power supply type | USB | Operating relative humidity (H-H) | 20 - 80% |
| Weight & dimensions | | Logistics data | |
| Width | 103 mm | Harmonized System (HS) code | 84719000 |
| Depth | 26 mm | Technical details | |
| | | Compliance certificates | REACH, RoHS |

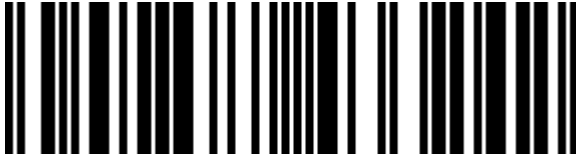

4002888433242

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 31-OCT-2024. Prints or copies of Information are only valid on the printed Publication date