



# ASUS ProArt PA279CV computer monitor 68.6 cm (27") 3840 x 2160 pixels 4K Ultra HD LED Black, Silver

**Brand :** ASUS

**Product family:** ProArt

**Product code:** 90LM06M1-B01170

**Product name :** PA279CV




- 27-inch 4K UHD (3840 x 2160) LED backlight display with IPS 178° wide viewing angle panel
  - International color standard 100% sRGB and 100% Rec. 709 wide color gamut
  - Calman Verified with factory calibrated for excellent Delta E < 2 color accuracy
  - Extensive connectivity including DP over USB-C™ with 65W Power Delivery, DisplayPort, HDMI, USB 3.0 hub
  - Adaptive-Sync technology (40~60Hz) to animated content with fast action and eliminate screen tearing
  - ASUS-exclusive ProArt Preset and ProArt Palette provide numerous adjustable color parameters
  - Ergonomic design with +35° ~ -5° tilt, ±45° swivel, ±90° pivot and 150mm height adjustments for a comfortable viewing experience
- 27", IPS, 4K UHD, 3840 x 2160, 5ms, 16:9, HDCP, 2 x HDMI, DisplayPort, USB Type-C, 4 x USB Type-A, 3.5mm, Flicker free, HDR-10, VESA, Frameless, 614 x 370 x 60 mm, 5.7 Kg

Display		Ports & interfaces	
Display diagonal *	68.6 cm (27")	Audio input	✗
Display resolution *	3840 x 2160 pixels	Headphone out *	✓
HD type *	4K Ultra HD	Headphone outputs	1
Native aspect ratio *	16:9	Headphone connectivity	3.5 mm
Display technology *	LED	HDCP	✓
Panel type *	IPS	AC (power) in	✓
Touchscreen *	✗	Ergonomics	
Display brightness (typical)	350 cd/m <sup>2</sup>	VESA mounting *	✓
Response time *	5 ms	Panel mounting interface	100 x 100 mm
Screen shape *	Flat	Cable lock slot *	✓
Supported graphics resolutions	3840 x 2160	Cable lock slot type	Kensington
Aspect ratio	16:9	Height adjustment *	✓
Contrast ratio (typical) *	1000:1	Height adjustment	15 cm
Contrast ratio (dynamic)	100000000:1	Pivot	✓
Dynamic contrast ratio marketing name	SmartContrast	Pivot angle	-90 - 90°
Maximum refresh rate *	60 Hz	Swivelling	✓
Viewing angle, horizontal	178°	Swivel angle range	-45 - 45°
Viewing angle, vertical	178°	Tilt adjustment	✓
Display number of colours *	1.073 billion colours	Tilt angle range	-5 - 35°
Pixel pitch	0.155 x 0.155 mm	Power	
Viewable size, horizontal	59.7 cm	Energy efficiency class (SDR) *	G
Viewable size, vertical	33.6 cm	Energy efficiency class (HDR) *	G
Viewable size diagonal	68.5 cm	Energy consumption (SDR) per 1000 hours *	32 kWh
Digital horizontal frequency	29 - 160 kHz	Energy consumption (HDR) per 1000 hours *	54 kWh
Digital vertical frequency	40 - 60 Hz	Power consumption (typical) *	32.1 W
High Dynamic Range (HDR) supported	✓	Power consumption (standby) *	0.5 W
High Dynamic Range (HDR) technology	High Dynamic Range 10 (HDR10)	Power consumption (off)	0.2 W
sRGB coverage (typical)	100%	AC input voltage	100 - 240 V
Performance		AC input frequency	50 - 60 Hz
VESA Adaptive Sync support	✓	Energy efficiency scale	A to G

<b>Performance</b>		<b>Power</b>	
Flicker-free technology	✓	European Product Registry for Energy Labelling (EPREL) code	403921
Low Blue Light technology	✓		
<b>Multimedia</b>		<b>Weight &amp; dimensions</b>	
Number of speakers	2	Width (with stand)	614 mm
RMS rated power	2 W	Depth (with stand)	227.8 mm
Built-in speaker(s) *	✓	Height (with stand)	523.4 mm
Built-in camera *	✗	Weight (with stand)	8.6 kg
<b>Design</b>		Width (without stand)	614 mm
Market positioning *	Photo editing	Depth (without stand)	60 mm
Product colour *	Black, Silver	Height (without stand)	370 mm
Frameless design	✓	Weight (without stand)	5.7 kg
Front bezel colour	Black	<b>Packaging data</b>	
Detachable stand	✓	Package width	516 mm
Feet colour	Silver	Package depth	161 mm
<b>Ports &amp; interfaces</b>		Package height	680 mm
Built-in USB hub *	✓	Package weight	11.2 kg
USB hub version	3.2 Gen 1 (3.1 Gen 1)	Package type	Box
Number of upstream ports	4	<b>Packaging content</b>	
USB Type-A downstream ports quantity	4	Stand included	✓
USB Type-C downstream ports quantity	1	Cables included	AC
DVI port	✗	Quick start guide	✓
HDMI *	✓	<b>Other features</b>	
HDMI ports quantity	2	Country of origin	China
HDMI version	2.0	Certification	TUV Flicker-free , TUV Low Blue Light, Calman Verified
DisplayPorts quantity	1	<b>Logistics data</b>	
DisplayPort version	1.2	Commodity Classification	
		Automated Tracking System (CCATS)	8528521000
		Harmonized System (HS) code	85285210



4718017853200

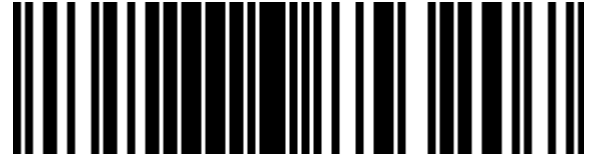


0192876853207



192876853207



4718017853170

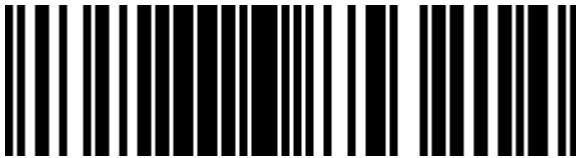

0192876853214



192876853214

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.