




Make It Yours.

FLEX YOUR GRAPHICS MUSCLE

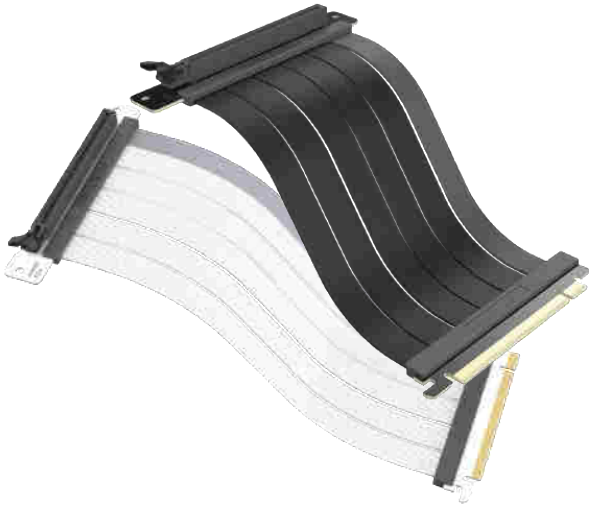

The Cooler Master PCIe 4.0 x16 Riser Cables are now fully redesigned and come equipped with an ultra flexible rubberized coating that eliminates cable-stiffness for an easier installation.

This new iteration of our premium riser cables offering now also comes in 2 brand new colorations to perfectly match your style and build.

The cherry on top? All our new riser cables now come equipped with premium silver-plated wiring instead of the more commonly tin-plated ones to ensure a longer cable lifespan.

FEATURES

PCIe 4.0 Compatible:

While providing twice the bandwidth of PCIe 3.0, the Gen 4.0 riser cable remains backwards compatible with a maximum transfer rate of over 64Gb/s (bi-directional) and fully supports the 16GT/s bit rate of PCIe 4.0 devices.

Ultra Durable PCB:

The multi-layer coated PCB provides best-in-class cable flex, moisture resistance, and performance even in environments subject to high condensation.

Heavy Duty Shielding:

EMI shielded 30 AWG silver-plated wires ensure minimal signal delay and electromagnetic interference-free operation.

Gold-Plated Pin Connections:

Gold-plated PCI pin are rated 400g of retention force per contact pairs, ensuring maximum product lifespan and durability.

New Protective ABS Casing:

The UV resistant ABS casing design has been revised and reduced in size to allow for an easier cable installation procedure.

New Ultra-Flexible Cable Sleeves:

The revised TPE cable sleeves allow for maximum flexibility and durability for the tightest cable routing jobs.

SPECIFICATIONS & PACKING INFORMATION

Product Name	MasterAccessory Riser Cable PCIe 4.0 x16 -200mm V2	MasterAccessory Riser Cable PCIe 4.0 x16 -300mm V2
Product Number	MCA-U002R-KPCI40-200 (Black) MCA-U002R-WPCI40-200 (White)	MCA-U002R-KPCI40-300 (Black) MCA-U002R-WPCI40-300 (White)
Units per package	1 unit per package	
Available colors	Black/White	
Compatibility	PCIe 4.0 and older	
Component Materials	PCBA, silver copper wire 30 AWG	
Insulation Materials	PE, TPE	
Other Materials	ABS, Nickel, Gold, PP, Brass, Silver	
Connectors	PCIe x16 Male to PCIe x16 90° Female	
Cable Length	200mm	300mm
Contact Current Rating	1.1A per contact pin	
Max Voltage Rating	30V	
Working Voltage / Current	DC 12v / 5A	
Operating Temperature	-20° to +100° Celsius	
Net Weight	78 g	98 g
Gross Weight	129 g	162 g
Warranty	1 year	

Product Name	MCA-U002R-KPCI40-200 (Black) MCA-U002R-WPCI40-200 (White)	MCA-U002R-KPCI40-300 (Black) MCA-U002R-WPCI40-300 (White)
EAN code	4719512137789 (Black) 4719512137765 (White) 6928968318002 (Black,CN) 6928968317982 (White,CN)	4719512137772 (Black) 4719512137741 (White) 6928968317999 (Black,CN) 6928968317975 (White,CN)
UPC code	884102110108 (Black) 884102110085 (White)	884102110092 (Black) 884102110061 (White)
Carton Net Weight	1.56 Kg (20pcs per carton)	1.96 Kg (20pcs per carton)
Carton Gross Weight	3.10 Kg (20pcs per carton)	3.78 Kg (20pcs per carton)
Retail box dimension (L x W x H)	175mm x 155mm x 23mm	243mm x 155mm x 23mm
Carton dimension (L x W x H)	360mm x 329mm x 203mm	360mm x 257mm x 350mm

MCA-U002R-KPCI40-200 (Black), MCA-U002R-WPCI40-200 (White)

Cont.	W/ Pallet	Carton/ Pallet	W/O Pallet
20'	14400	60	N/A
40'	28800	60	N/A
40 HQ	31680	66	N/A

MCA-U002R-KPCI40-300 (Black), MCA-U002R-WPCI40-300 (White)

Cont.	W/ Pallet	Carton/ Pallet	W/O Pallet
20'	12320	56	N/A
40'	24640	56	N/A
40 HQ	29040	66	N/A