

SPECIFICATION SHEET



HDMI Dongle Adapters

- Converts an HDMI Digital A/V signal to VGA or DVI
- Maximum resolution of 1080p
- Utilizes Micro USB for power (VGA dongles)

Specifications: HDMI Dongle Adapters

Electrical Characteristics:

Resolutions Supported:	480i/480p, 576i/576p, 800x600, 720i/720p 1280x1024, 1600x1200, 1080i/1080p
Voltage:	5V, 500mA (VGA models)
Voltage Rating:	30V
Pixel clock rate:	Up to 165MHz
Impedance :	100±5
Intra-pair skew:	15ps/m max

Physical Characteristics:

Minimum Bend Radius:	12mm
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10° to 40° C
Adapter Length:	203mm
Approvals:	CE

Conductor (Qty. 3): (Part #41350-52)

Conductor Type:	32AWG 7/0.08TCS x15 Tinned Copper
Insulation:	Foam-PE, $\phi 0.63 \pm 0.05$
Shield:	AL Wrap; Braid, 16/6/0.12AMA 75% Coverage
Drain:	32AWG 7/0.127B

Overall Cable



Jacket:	PVC, Black
OD:	5.5 ϕ 0.2

Conductor (Qty. 3): (Part #41351)


Conductor Type:	34AWG 7/0.06TCS x15 Tinned Copper
Insulation:	Foam-PE, $\phi 0.5 \pm 0.05$
Shield:	AL Wrap; Braid, 16/10/0.08TCS 85% Coverage
Drain:	34AWG 7/0.127B

Overall Cable

Jacket:	PVC, Black
OD:	4.8 ϕ 0.15

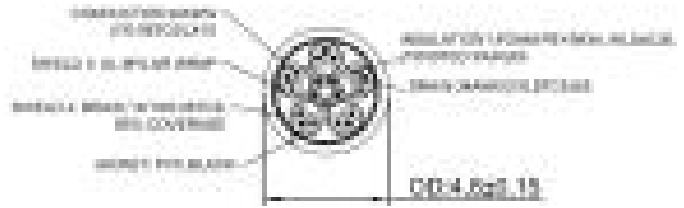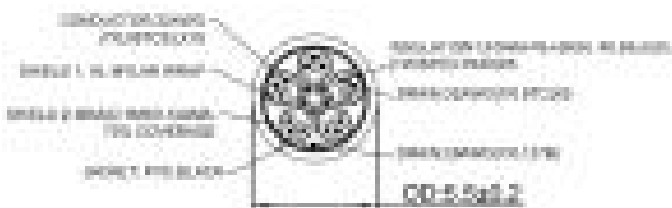

Specifications: HDMI Dongle Adapters

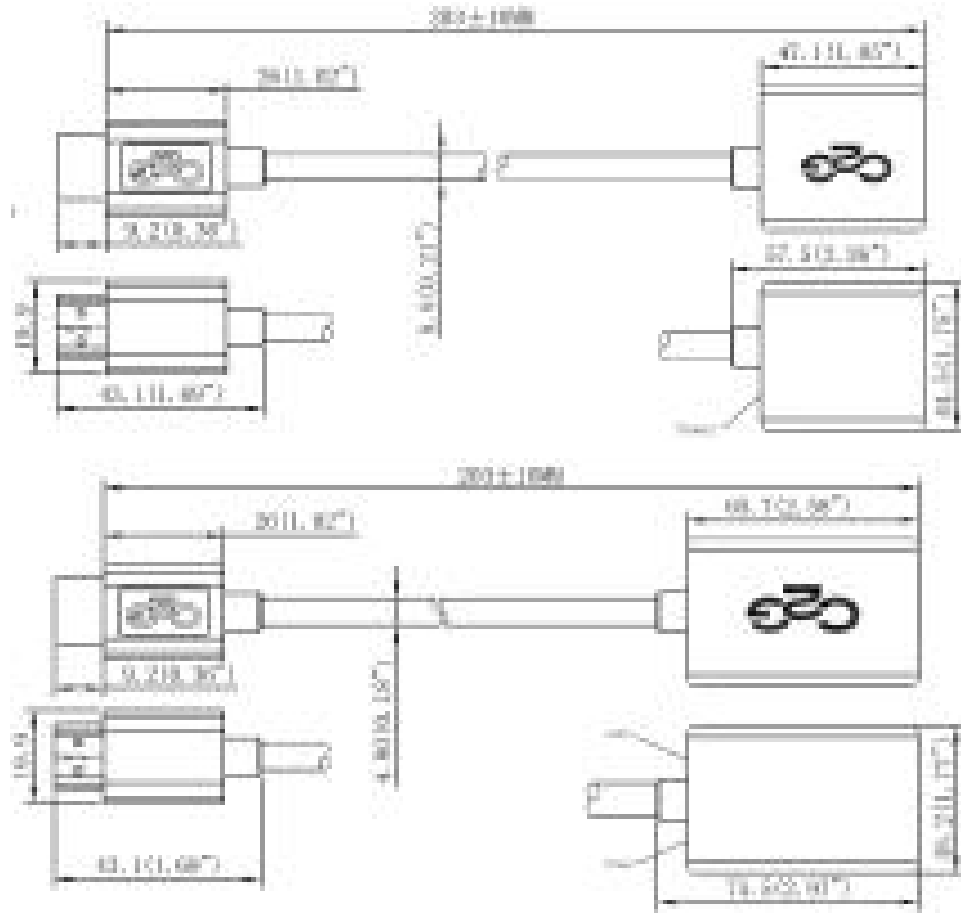

Part Number	Description	Weight (lbs)
41350	HDMI Male to VGA Female Adapter Converter Dongle	0.098
41351	HDMI Male to VGA and Stereo Audio Female Adapter Converter Dongle	0.097
41352	HDMI Male to Single Link DVI-D Female Adapter Converter Dongle	0.111

©2014 Legrand All Rights Reserved SpecSheet MSPEC_41350-52_R0



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Mississauga, ON L4V 3P9
 Phone: 800.267.2843
www.c2g.com

Follow Us

