Lindy DST-Mini Duo, USB-C Laptop Mini Docking Station 2x 4K HDMI

Brand : Lindy

Product code: 43373

Product name : DST-Mini Duo, USB-C Laptop Mini Docking Station 2x 4K HDMI
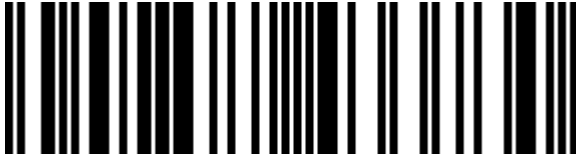

- Connects 2 HDMI displays, USB peripherals, Gigabit Ethernet and power over a single cable
- Supports 8K 30Hz or 4K 120Hz for a single display and 4K for two displays (MST)*
- Integrated 3 port USB SuperSpeed 10Gbps Hub (2 x USB Type A, 1 x Type C) and 3port 5Gbps Hub
- USB Power Delivery capable up to 100W
- 2 year warranty

DST-Mini Duo, USB-C Laptop Mini Docking Station 2x 4K HDMI
Lindy DST-Mini Duo, USB-C Laptop Mini Docking Station 2x 4K HDMI. Connectivity technology: Wired, Host interface: USB 3.2 Gen 2 (3.1 Gen 2) Type-C, USB Power Delivery up to: 100 W. Ethernet LAN data rates: 10,100,1000 Mbit/s, Copper ethernet cabling technology: 10BASE-T, 100BASE-TX, 1000BASE-T. Product colour: Grey, Data transfer rate: 10 Gbit/s, HD type: 8K Ultra HD. Power source type: USB, Power connector: USB Type-C, Power cable length: 0.22 m. Mobile operating systems supported: Android, Other operating systems supported: ChromeOS

Ports & interfaces

Connectivity technology *	Wired
Host interface *	USB 3.2 Gen 2 (3.1 Gen 2) Type-C
USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity	5
USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity	1
USB Power Delivery	✓
USB Power Delivery revision	3.0
USB Power Delivery up to	100 W
HDMI ports quantity *	2
HDMI version	2.1
Microphone in *	✗
HDCP	✓
HDCP version	2.3

Network

Ethernet LAN *	✓
Ethernet LAN (RJ-45) ports	1
Ethernet LAN data rates	10,100,1000 Mbit/s
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T
Wake-on-LAN ready	✓

Performance

Data transfer rate	10 Gbit/s
HD type	8K Ultra HD
Maximum digital resolution	7680 x 4320 pixels
Product colour *	Grey
Housing material	Aluminium, Plastic

Power

Power source type	USB
Power connector	USB Type-C
Power cable length	0.22 m

Software

Windows operating systems supported	✓
Mac operating systems supported	✓
Linux operating systems supported	✓
Mobile operating systems supported	Android
Other operating systems supported	ChromeOS

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-10 - 60 °C
Operating relative humidity (H-H)	10 - 85%

Sustainability

Sustainability compliance	✓

Weight & dimensions

Width	165 mm
Depth	49 mm
Height	21.7 mm
Weight	160 g

Packaging data

Quantity per pack	1 pc(s)
Package width	185 mm
Package depth	80 mm
Package height	25 mm
Package weight	200 g

Packaging content

Manual	✓

Technical details

Compliance certificates	CE, Federal Communications Commission (FCC), REACH, RoHS

4002888433730