

Product Highlights

Easy Expansion

Easily add 4 x USB 3.0 ports to any Windows and macOS computers, Chromebooks and iPad Pro with a spare USB-C port. Simply plug in, no need to install additional software

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer les up to 10 times faster than with USB 2.0

Fast Charge Port

One USB 3.0 port with Quick Charge BC 1.2 support allows you to charge devices faster



DUB-2340

USB-C to 4-Port USB 3.0 Hub with Power Delivery


Features

Versatile and Convenient

- Four USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 port supports Quick Charge BC 1.2
- One USB 3.0 Type-C port with data sync and power delivery of up to 60 W (20 V @ 3 A)⁴
- · Simply plug-and-play, no software required
- · Compact design
- Compatible with Windows and macOS computers, Chromebooks and iPad Pro

The DUB-2340 USB-C to 4-Port USB 3.0 Hub with Power Delivery instantly adds four USB 3.0 ports, including one with support for Quick Charge BC 1.2 and a USB-C port with charging ability to your Windows and macOS computers, Chromebooks and iPad Pro. Just plug the DUB-2340 into an available USB-C port, and you're ready to connect up to four USB devices and charge your device faster, as well as sync and charge one USB-C device, meaning that you don't have to give up that USB-C port this hub is connected to.

Hardware Overview

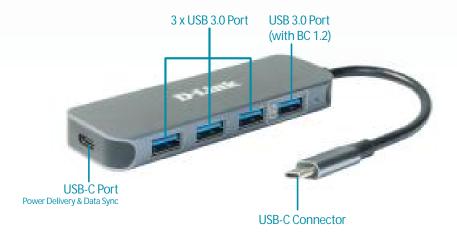

DUB-2340 USB-C to 4-Port USB 3.0 Hub with Power Delivery

Technical Speci cations		
Connectivity		
Interfaces	 One USB Type-C connector Three USB 3.0 Type-A ports One USB 3.0 Type-A port with Fast Charge mode support One USB Type-C/PD 3.0 port 	
LEDs	Power (per device) Solid green - power is on	
General		
Standards	• USB 3.0 • USB 2.0 • USB 1.1	
Data rate	• Up to 5 Gbps	
System requirements	Available USB Type-C port	 Windows 7/8/8.1/10, macOS (OS X 10.8 and above) Chromebook, iPad Pro
Physical		
Dimensions (W x H x D)	• 118 x 35 x 13 mm	
Weight	• 70 g	
Power	From computer (USB bus powered)	
Supplied charging voltage/current	 20 V / 3 A (PD 3.0) Max. 1.5 A for Battery Charging 1.2 compliant por 0.5 A for standard ports 	t
Temperature	Operating: 0 to 45 °C	• Storage: -10 to 70 °C
Humidity	Operating: up to 85% non-condensing	Storage: up to 85% non-condensing
Certifications	• CE	

 $^{^{\}rm 1}$ Please make sure that the USB Type-C port of your laptop supports PD 3.0.



For more information: eu.dlink.com

