

Product Highlights

Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0

Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



DUB-2327

6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery

Features

High Fidelity Video Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz³

SD Card Compatibility


- SD card¹ & microSD card²
- SD, SDHC, SDXC

Versatile and Convenient

- Two USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 60 W (20 V @ 3 A)⁴
- Simply plug-and-play, no software required
- Compact design
- Compatible with Windows and macOS computers, Chromebooks and iPad Pro

The DUB-2327 6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery instantly adds a second display, a SD card reader, two USB 3.0 ports, and a USB-C port with charging ability to your Windows and macOS computers, Chromebooks and iPad Pro. Just plug the DUB-2327 into an available USB-C port, and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to three USB devices and insert a microSD or regular SD card, giving you direct access to your full-resolution photos stored on memory cards from your cameras. You can also sync and charge one USB-C device, meaning that you don't have to give up that USB-C port this hub is connected to.

Hardware Overview

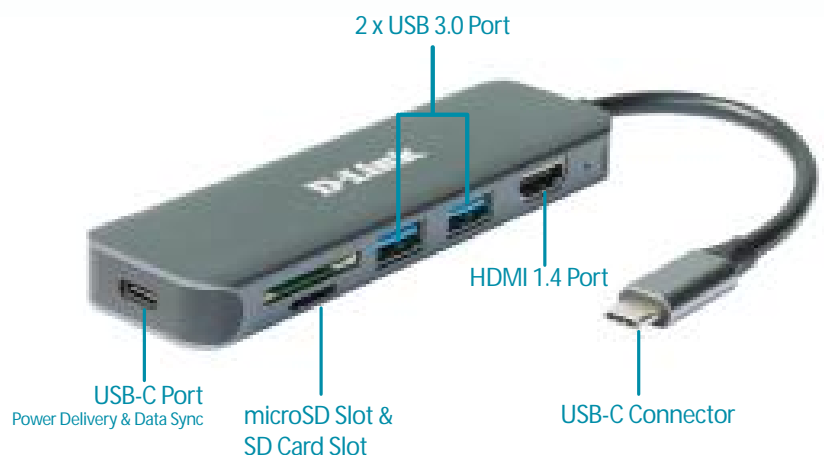

6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery

Technical Specifications	
Connectivity	
Interfaces	<ul style="list-style-type: none"> • One USB Type-C connector • Two USB 3.0 Type-A ports • One USB Type-C/PD 3.0 port <ul style="list-style-type: none"> • One HDMI port • SD card slot¹ • microSD card slot²
LEDs	<ul style="list-style-type: none"> • Power (per device) • Solid green - power is on
General	
Standards	<ul style="list-style-type: none"> • USB 3.0 • USB 2.0 • USB 1.1
Data rate	<ul style="list-style-type: none"> • Up to 5 Gbps
Resolution	<ul style="list-style-type: none"> • 4K @ 30 Hz
System requirements	<ul style="list-style-type: none"> • Windows 7/8/8.1/10, macOS (OS X 10.8 and above) • Chromebook, iPad Pro • USB Type-C port supporting DP Alt (DisplayPort Alternate Mode) for HDMI output
Physical	
Dimensions (W x H x D)	<ul style="list-style-type: none"> • 118 x 35 x 13 mm
Weight	<ul style="list-style-type: none"> • 70 g
Power	<ul style="list-style-type: none"> • From computer (USB bus powered)
Supplied charging voltage/current	<ul style="list-style-type: none"> • 20V / 3 A (PD 3.0)
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 45 °C • Storage: -10 to 70 °C
Humidity	<ul style="list-style-type: none"> • Operating: up to 85% non-condensing • Storage: up to 85% non-condensing
Certifications	<ul style="list-style-type: none"> • CE

¹ The docking station is compatible with SD/SDHC/SDXC cards.

² The docking station is compatible with microSD/SDHC/SDXC cards.

³ Please make sure that the USB Type-C port of your computer supports DP Alt (DisplayPort Alternate Mode).

⁴ Please make sure that the USB Type-C port of your laptop supports PD 3.0.



For more information: eu.dlink.com

D-Link (Deutschland) GmbH, Schwalbacher Strasse 74, 65760 Eschborn, Germany
D-Link (Europe) Ltd, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

Updated April 2022

D-Link[®]
Building Networks for People