

ControlSpace® EX-UH USB/Headset Dante™ endpoint

Product Description

Optimized for use with the EX-1280C, the EX-UH Dante™ endpoint, is a convenient, cost effective solution for connecting remote BYOD devices or telephone handsets over a single cat-5/6 cable. Whether used under a conference table to connect a laptop running a soft-codec such as Skype for Business, or to connect a customer's handset for bridging calls, or both, the EX-UH's high-quality USB and headset to Dante™ audio conversion simplifies wiring and adding extra codecs to a conferencing system. Autodiscovery, drag and drop programming, and auto-routing in ControlSpace® Designer™ make connecting the EX-UH easy.



Key Features

- **One-cable-from-the table connectivity** supports PoE+ and Dante audio networking to maximize ease of integration
- **Dante™ audio networking** for connection to other Dante-enabled products over Ethernet-based networks.
- **USB 2.0 connector** supports PC connections to soft codecs such as Skype for Business™
- **Headset connectors** for direct connection to office and mobile phones through RJ-9 and 3.5 mm TRRS ports
- **Dual network and power connectors** allow daisy-chaining of multiple EX endpoints
- **Rotatable mounting tabs** allow for multiple mounting options
- **Low-profile aluminum enclosure** with integrated LED indicators for unobtrusive under-table mounting
- **Simplified software configuration** via ControlSpace Designer software. Supports autodiscovery, auto-routing, and logic presets for microphone LEDs and pushbuttons
- **Optional magnetic mounting plate** for single-handed under-table mounting, and a 60 W power supply
- **Power and signal indicators**

Applications

Designed for a wide range of applications, including:

- Boardrooms
- Medium/large conference rooms
- Courtrooms
- Distance learning
- Auditoriums
- Multi-purpose spaces

ControlSpace® EX-UH USB/Headset Dante™ endpoint

Technical Specifications

COMMUNICATION PORTS	
USB Audio	USB v2.0, Micro-B type, audio class-compliant (no drivers required), 2-ch input/2-ch output
Telephone Headset	RJ-9 (1 in x 1 out) and 3.5 mm TRRS (1 in, 2 out)


AUDIO OVER IP	
Dante™ Audio Networking	Ultimo X4

POWER	
PoE Class	Class 0 802.3at PoE+ PD compliant
External Connectors	(2) 3.81 mm detachable Euroblock connector, 2-pin
External Power Supply	12 VDC, 5 watts
Power Consumption	5 watts

SOFTWARE APPLICATION	
ControlSpace Designer software version 5.0 or later	

GENERAL	
LED Status Indicators	Power, two (2) tri-color signal status for USB and headset
Frequency Response	20 Hz — 20 kHz, ± 1 dB
Digital Conversion	24 kHz / 24-bit
Certifications	FCC Part 15 Class A; UL 60950-1, 2nd edition, 2014-10-14, CAN/CSA C22.2 No. 60950-1-07, 2nd edition, 2014-10, IEC 60950-1:2005 (2nd edition)
Operating Temperature	32° F — 104° F (0° C — 40° C)
Product Code	771784-0110

Front Panel

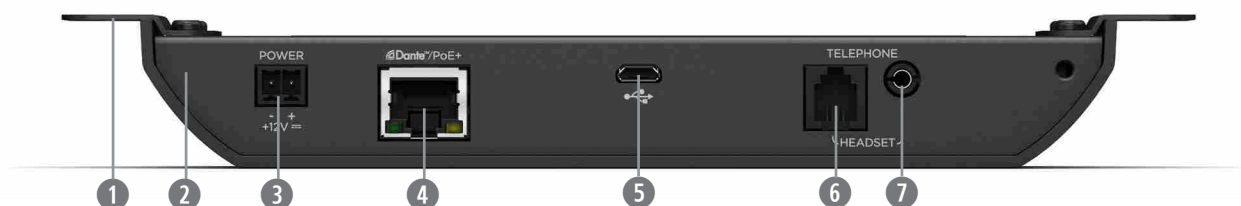

- ❶ **Rotatable Mounting Tabs** – Multiple mounting options
- ❷ **Rugged Metal Enclosure** – Sleek and unobtrusive for under-table use
- ❸ **+12 VDC Connector** – External DC power supply
- ❹ **Network Port** – Supports PoE+, Dante and ControlSpace control
- ❺ **Micro-B USB 2.0** – For PC soft codec connections
- ❻ **RJ-9** – For connecting to telephone handset headset port (shared with TRRS connection)
- ❼ **3.5mm TRRS AHJ (L/R/GND/Mic)** – for laptops and mobile phones (shared with RJ9 connection)

ControlSpace® EX-UH USB/Headset Dante™ endpoint




Rear Panel





- ❶ Dante/Network Connector – Daisy-chainable Dante or service port
- ❷ Daisy-Chainable Power Output – Allows multiple units to be powered via external power supply


Mechanical Diagrams



Top View

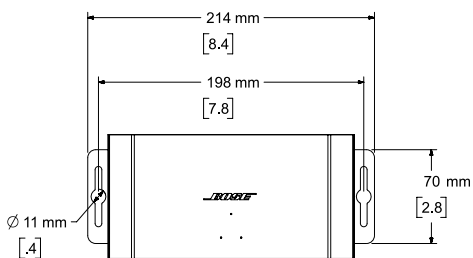


Front View



Right View

DIMENSIONS APPLY TO BOTH SIDES

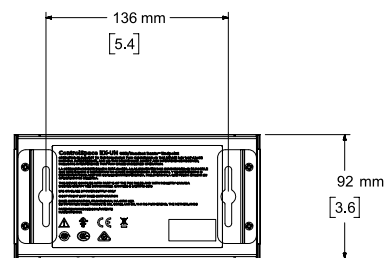

Rear View

All information subject to change without notice.
© 2018 Bose Corporation
All trademarks are those of their respective owners.