



RHINO™ 6000+

PC-connected or portable labeling tool

Create labels from DYMO® ID software on PC and print with RHINO™ 6000+ for easy editing



Print up to 24mm labels in different colors, materials and sizes



convenient auto-cutter



Print 8 barcode types including QR codes



250+ pre-programmed industry symbols



RHINO™ 6000+ comes in a practical kit case



Use the FREE DYMO® ID™ PC software



RHINO™ IND | Authentic Labels

- Flat Surface
- Textured Surface
- Cable/Wire
- UV Resistant
- Water Resistant
- Oil Resistant
- Chemical Resistant
- Temperature: -40° C to 150° C

100% recycled material used for external cassette

Reach compliant

RoHS compliant

DYMO® high quality labels are made in Belgium



RHINO™ 6000+

Introducing the RHINO™ 6000+ - the latest in the range of top-quality labelling tools from RHINO™ - with PC Connectivity via DYMO® ID Software!

Our research tells us that the most important thing for an installer from a labelling tool is that it should be "easy to use"; the RHINO™ 6000+ has been designed with special features to make it just that: label cassettes can be loaded and unloaded with no hesitation; the generously sized LCD allows you to edit and preview multiple labels and

the RHINO™ "hot-key" technology provides shortcuts to your most common applications. Of course, the RHINO™ 6000+ also prints on the RHINO™ range of industrial-strength labels, which are built to withstand all kinds of harsh treatments including solvents, UV, moisture, harsh temperatures as well as being almost totally smudge-proof.

Delivering the highest level of performance at high-end installations, the RHINO™ 6000+ is built to remain your labelling tool of choice for a long, long time.

Intuitive Graphical Interface
Create, edit and preview multiple labels on our largest backlit LD

One-Touch, Power-Assisted Cutter
Eliminate the fatigue of manual cutting and increase efficiency

Hot Keys
Eliminate guesswork and complicated menus; enjoy fast and easy formatting of commonly used label types

Label Memory
Create and customize over 1000 labels with logos and symbols and save them for instant recall

Auto-cutter
Convenient and simple

Quick-Charge Li-Ion Rechargeable Battery
With on-screen battery life indicator

Symbols
Over 100 pre-programmed industry symbols

Integrated Impact Bumper
Protects your tool against the daily knocks on site



DYMO® ID SOFTWARE

Get added labeling ease with DYMO® ID software. Only DYMO® ID software provides the same great life-like on screen print previews, built-in label applications and pre-loaded templates found on your XTL™ label maker and RHINO™ 6000+, whilst adding in features to help further simplify high-volume labeling tasks.

Available as a FREE download from dymo.com

BUILT-IN LABEL APPLICATIONS

simply select an application from the Home screen to get started quickly



General



Cable Wrap



Patch Panel



Horizontal Breaker



Asset Tracking



Heat-Shrink Tube



Quick



Flag



Distribution Panel





Terminal Block



Vertical Breaker

Instant access to hundreds of time-saving pre-loaded templates for patch panels, asset tracking, materials management, and safety signage

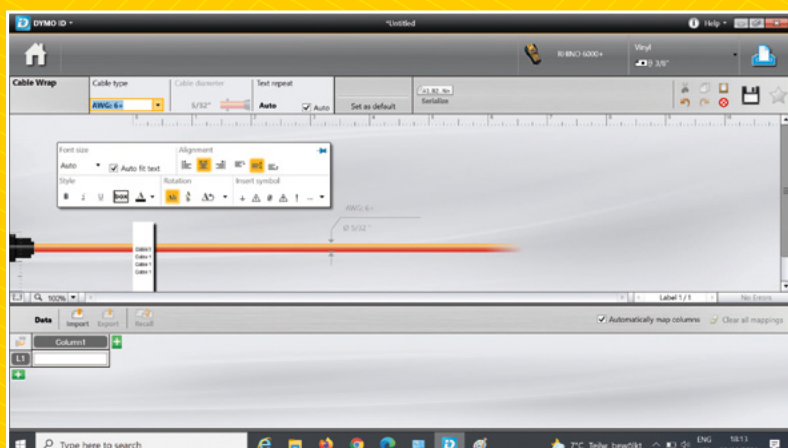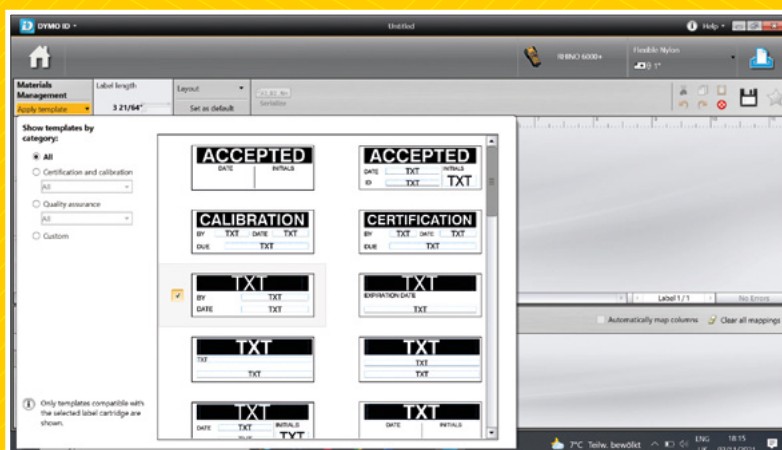

Life-like on screen print preview shows exactly how labels will look when applied to cables, pipes and more





RHINO™ Industrial Labels

Find the right label for the right application

RHINO™ Industrial Labels are reliable, tough & jobsite-tested labels for industrial applications.

- ▶ The industrial labels are heat, chemical and UV-resistant, and backed by industrial-strength adhesives that stick and stay stuck in harsh conditions.
- ▶ Available in a wide range of colours, materials ideal for flat and curved surfaces, both in- and outdoor.
- ▶ “Easy Peel” for trouble-free application

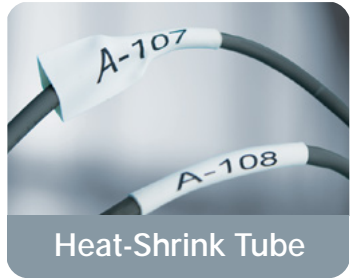

Vinyl

Temperature rating: -40°C to 80°C

Icons: Adhesive types, UV, Chemical, Water, Spray

Dimensions: 9 mm x 5.5 m, 12 mm x 5.5 m, 19 mm x 5.5 m, 24 mm x 5.5 m

Permanent Polyester

Temperature rating: -40°C to 150°C*

Icons: Adhesive types, UV, Chemical, Water, Spray

Dimensions: 6 mm x 5.5 m, 9 mm x 5.5 m, 12 mm x 5.5 m, 19 mm x 5.5 m, 24 mm x 5.5 m

Flexible Nylon

Temperature rating: -40°C to 60°C

Icons: Adhesive types, UV


Dimensions: 12 mm x 3.5 m, 19 mm x 3.5 m, 24 mm x 3.5 m

Heat-Shrink Tube

Temperature rating: Up to 125°C

Icons: Adhesive types, UV, Water

Dimensions: 6 mm x 1.5 m, 9 mm x 1.5 m, 12 mm x 1.5 m, 19 mm x 1.5 m, 24 mm x 1.5 m



DYMO® high quality labels are made in Belgium



Reach compliant



RoHS compliant



This information is being provided for general information purposes and the compliance standards and certifications referenced herein are based on current standards which are subject to change.



© 2021 Newell Brands

Country of Origin: Belgium