

# CM608

## 6.5" two-way loudspeaker, white



The CM608 two-way built-in low impedance loudspeaker is "the reference loudspeaker". It can be used with a standard hi-fi amplifier and provides you with a Pro HiFi sound.

The loudspeaker has an enforced 6 ½" woofer and 1" tweeter. It makes the CM608 very suitable for the distribution of background music. The housing is made of high quality ABS and the woofer is made out of polypropylen, what makes it moisture-proof.

This loudspeaker is easy to install, due to its simple, quick mounting system (3 screws which are hidden behind the loudspeakergrill, which gives the loudspeaker a modern and striking design). This loudspeaker is now updated with a new Quick Fix connector for an even faster and easier installation. (not for CM608-SLV)

The complete redesign of the CM Series is done according to the corporate Apart identity. Apart blue speaker clamps and product sticker, an Apart marked transformer and loudspeaker basket. (not for CM608-SLV)


The CM608 loudspeakers can be painted in any colour.

#### **TECHNICAL SPECIFICATIONS**

| outside diameter in mm         | 205                        | depth in mm                    | 75                     |
|--------------------------------|----------------------------|--------------------------------|------------------------|
| cutout in mm                   | 186                        | installation grip range in mm  | 2 - 25                 |
| loudspeaker system             | 2-way                      | woofer size in inch            | 6.5                    |
| woofer cone material           | polypropylene              | tweeter size in inch           | 1                      |
| mounting system                | 3 screws                   | colour                         | white / black / silver |
| impedance in ohms              | 8                          | low impedance dynamic power    | 60                     |
| low impedance RMS power in     | 40                         | in watts                       |                        |
| watts                          |                            | SPL 1W/1m in dB                | 92                     |
| max SPL 1m in dB               | 104                        | frequency response in Hz       | 60 - 20K               |
| main construction material     | ABS plastic                | grille main material           | aluminium              |
| IP rating                      | 54                         | applicable low impedance       | yes                    |
| applicable in 100V             | no                         | Vertical dispersion angle 1000 | 180°                   |
| closest RAL colour (subject to | RAL9010 (W) / RAL9011 (BL) | Hz                             |                        |
| deviations)                    |                            | Net weight product in kg       | 1.15                   |



#### **POLAR PLOTS**

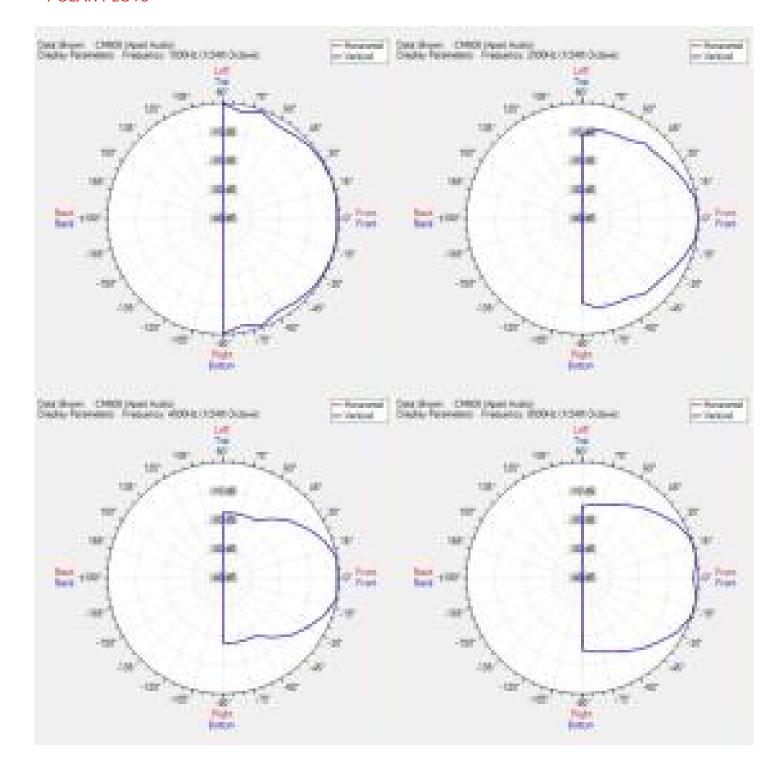



## MORE PICTURES





### **ACCESSORIES**



T60 8 ohms / 100 volt transformer, 60 watts



T20 8 ohms / 100 volt transformer, 20 watts



CMBB
On-wall box for CM- and CM-Design loudspeaker range