



- Support for multi-gigabit data rates up to 10Gb/s
- Data rates backward compatible to 1Gb/s
- Hot-pluggable SFP 20PIN footprint
- Compatible to SFP+ MSA
- Compatible to SFF-8431, SFF8432
- Compliant for enhanced EMI/EMC performance
- RoHS Compatible

The SFP+ Passive cable assemblies are high performance, cost effective I/O solutions for 10Gb Ethernet and 10G Fiber Channel applications. SFP/SFP+ copper modules allow hardware manufacturers to achieve high port density, configurability and utilization at a very low cost and reduced power budget. The high speed cable assemblies meet and exceed Gigabit Ethernet and Fiber Channel industry standard requirements for performance and reliability.


### Applications

- High Passive I/O in Storage Area Networks, Network Attached Storage, and Storage Servers
- Switched fabric I/O such as ultra high bandwidth switches and routers
- Data center cabling infrastructure
- High density connections between networking equipment

### Operating Conditions


- Temperature
  - Operating: 0 ~ 70 C
  - Storage: -40 ~ 85
- Humidity
  - 0 ~ 85% RH (non-condensing)
- Power Supply Voltage
  - 3.3V
- Power Dissipation
  - 0.2 Watt (Max)

### Install the Cable

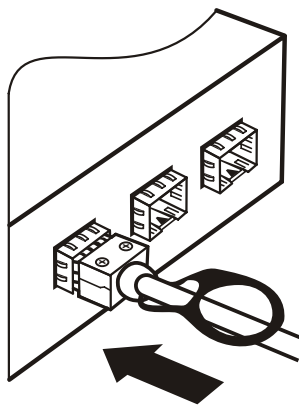

Insert the connector into the slot

### Remove the Cable

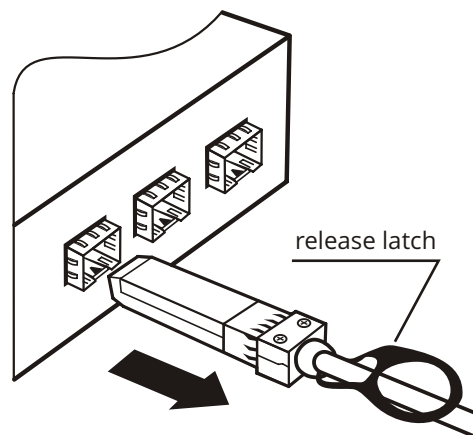

Pull the release latch to remove