



Philips Signage Solutions 37BDL3050S/00 Signage Display 94 cm (37") 700 cd/m² Full HD Black Built-in processor Android 8.0 24/7



Brand : Philips


Product family: Signage Solutions

Product code: 37BDL3050S/00

Product name :
37BDL3050S/00

Philips Signage Solutions 37BDL3050S/00. Display diagonal: 94 cm (37"), Display resolution: 1920 x 540 pixels, Display brightness: 700 cd/m², HD type: Full HD. Operating hours (hours/days): 24/7. Operating system installed: Android 8.0. Product colour: Black

Display		Performance	
Display diagonal *	94 cm (37")	On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Czech, Danish, German, Dutch, English, Spanish, French, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Display resolution *	1920 x 540 pixels		
Display brightness *	700 cd/m ²		
HD type *	Full HD		
Native aspect ratio	32:9	Operating hours (hours/days)	24/7
Response time	8 ms	Mean time between failures (MTBF)	50000 h
Contrast ratio (typical)	4000:1	Power	
Viewing angle, horizontal	178°	Power consumption (typical) *	70 W
Viewing angle, vertical	178°	Power consumption (standby) *	0.5 W
Pixel pitch	0.47 x 0.47 mm	Input voltage	100/240 V
Ports & interfaces		AC input voltage	100/240 V
HDMI ports quantity *	2	AC input frequency	50 - 60 Hz
HDMI version	2.0	Computer system	
HDMI input ports quantity	1	Built-in processor *	✓
HDMI output ports quantity	1	Internal memory	2 GB
VGA (D-Sub) input ports	1	On-board graphics card model	ARM Mali-G51
USB port *	✓	Internal storage capacity	8 GB
USB ports quantity	1	Operating system installed	Android 8.0
USB version	2.0	Weight & dimensions	
USB connector type	USB Type-A	Display width	928.5 mm
Ethernet LAN *	✓	Display depth	48.7 mm
Ethernet LAN (RJ-45) ports	1	Display height	282.3 mm
PC Audio in	✓	Display weight	7.76 kg
RS-232 interface	✓	Packaging content	
Remote (IR) input	1	Remote control included	✓
Remote (IR) output	1	Batteries included	✓
Design		Cables included	AC, HDMI, IR sensor, RS-232
Placement supported *	Indoor	Mounting kit	✓
Orientation	Horizontal	Operational conditions	
Product colour *	Black	Operating temperature (T-T)	0 - 40 °C
VESA mounting *	✓	Operating relative humidity (H-H)	20 - 80%
Panel mounting interface	400 x 200 mm	Storage temperature (T-T)	-20 - 60 °C
		Storage relative humidity (H-H)	5 - 95%
		Certificates	
		Certification	THIS FCC Class A CB

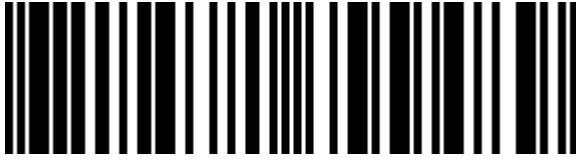

8712581799489



0810112790016



810112790016

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.