



# APC NetShelter Rack Automatic Transfer Switch, 1U, 16A, 230V, 2 C20 IN, 8 C13, 1 C19 OUT, 50/60Hz

**Brand :** APC

**Product code:** AP4423A

**Product name :** NetShelter Rack Automatic Transfer Switch, 1U, 16A, 230V, 2 C20 IN, 8 C13, 1 C19 OUT, 50/60Hz




NetShelter Rack Automatic Transfer Switch, 1U, 16A, 230V, 2 C20 IN, 8 C13, 1 C19 OUT, 50/60Hz

APC NetShelter Rack Automatic Transfer Switch, 1U, 16A, 230V, 2 C20 IN, 8 C13, 1 C19 OUT, 50/60Hz:

APC NetShelter Rack Automatic Transfer Switch (ATS) AP4423A is the Fifth-Generation range of high availability switches offering greater control of your IT equipment from Cloud to Edge. With Industry leading reliability, agility, and manageability the APC NetShelter Rack ATS provides redundant power to single-corded equipment loads in the IT rack. AP4423A is single phase 1U Rack ATS with 16A rated current, 230V rated voltage and 3700VA load capacity. It comes with 2 IEC C20 inlet and 8 IEC C13, 1 IEC C19 outlet sockets. This has been upgraded with APC NMC3 and various technical advancements for network port sharing, environmental monitoring and enhanced security. It has 2-years of standard warranty and 5-years of extended warranty for peace of mind and use for years to come. Users can access and configure Rack ATS through secure Web UI, SNMP, CLI and are fully compatible with EcoStruxure IT.



Power		Operational conditions	
Input operation voltage (min) *	207 V	Operating temperature (T-T)	-5 - 45 °C
Input operation voltage (max) *	253 V	Storage temperature (T-T)	-25 - 65 °C
AC input frequency	50 - 60 Hz	Operating relative humidity (H-H)	5 - 95%
Input current	20 A	Weight & dimensions	
Design		Width	432 mm
Form factor *	Rackmount	Depth	236 mm
Rack capacity	1U	Height	44 mm
Product colour	Black	Weight	3.74 kg
Certification	CE, cUL listed, EN 55022 class A, FCC part 15 class A, UL listed	Packaging data	
Ports & interfaces		Package width	600 mm
AC outlets quantity	9 AC outlet(s)	Package depth	356 mm
AC outlet types	C13 coupler, C19 coupler	Package height	114 mm
		Package weight	5.51 kg

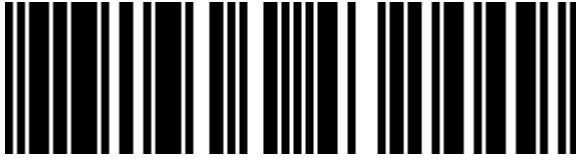

0731304432449



731304432449

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 04-NOV-2024. Prints or copies of Information are only valid on the printed Publication date