



Lindy 50m 4 Port USB 2.0 Cat.6 Extender

Brand : Lindy

Product code: 42681

Product name : 50m 4 Port USB 2.0 Cat.6 Extender

50m 4 Port USB 2.0 Cat.6 Extender

[Lindy 50m 4 Port USB 2.0 Cat.6 Extender:](#)


This Lindy USB 2.0 Cat.6 Extender can be used to extend the distance between four USB peripheral devices and the host computer by up to 50m.

A standard, low cost Cat.5e/6 network cable (not included) is used to bridge the connection between the transmitter and the receiver unit. For best performance and compatibility, we recommend the use of solid core patched cables.

The Extender features Power over Cable, which requires a single power supply only to be connected to the transmitter unit. This handy feature allows the receiver unit and connected devices to be located more freely as no power supply is required. With robust metal housing and integrated mounting brackets this Extender is the ideal solution for industrial environments.



Performance		Power	
Type *	Network transmitter & receiver	Power note	3.5/1.35mm DC
Maximum transfer distance *	50 m	Included power plug types	AU, EU, UK, US
Data transfer rate	480 Mbit/s	Operational conditions	
Cable types supported	Cat5, Cat5e, Cat6	Operating temperature (T-T)	0 - 70 °C
Chipset (transmitter)	NS1021	Storage temperature (T-T)	-20 - 80 °C
Plug and Play	✓	Operating relative humidity (H-H)	0 - 90%
Ports & interfaces		Storage relative humidity (H-H)	0 - 90%
Ethernet LAN (RJ-45) ports	2	Weight & dimensions	
RJ-45 ports quantity (transmitter)	1	Weight	415 g
RJ-45 ports quantity (receiver)	1	Transmitter width	6 cm
USB 2.0 ports quantity	5	Transmitter depth	6.7 cm
DC-in jack	✓	Transmitter height	2.3 cm
Contact material	Phosphor bronze	Receiver width	11 cm
Connector contacts plating	Gold	Receiver depth	6.4 cm
Connector material	Gold	Receiver height	2.3 cm
Design		Packaging content	
Product colour	Black	Cables included	USB Type-A to USB Type-B
Housing material	Metal	Manual	✓
LED indicators	✓	Packaging data	
Certification	CE, UKCA, FCC, RoHS, REACH	Package type	Box
Power		Package width	215 mm
External power adapter	✓	Package depth	155 mm
Output voltage	24 V	Package height	50 mm
Output current	0.5 A	Package volume	600 cm ³
Power over Ethernet (PoE)	✓	Logistics data	
		Harmonized System (HS) code	85176990

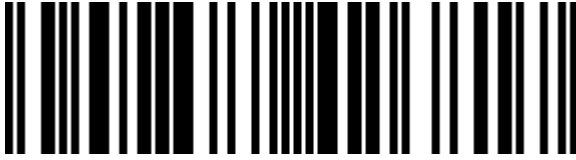

4002888426817

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 04-NOV-2024. Prints or copies of Information are only valid on the printed Publication date