



## Viewsonic PA503S data projector Standard throw projector 3600 ANSI lumens DLP SVGA (800x600) Grey, White

**Brand :** Viewsonic

**Product code:** PA503S

**Product name :** PA503S


800 x 600, DLP, 3600 ANSI lum, 30-300", 190 W, 4:3, Mini USB B, RS-232, RCA, 3.5mm, HDMI 1.4, VGA, 2x RGB, 2 W RMS, 294x218x110 mm

Viewsonic PA503S. Projector brightness: 3600 ANSI lumens, Projection technology: DLP, Projector native resolution: SVGA (800x600). Light source type: Lamp, Service life of light source: 4500 h, Service life of light source (economic mode): 15000 h. Focus: Manual, Zoom type: Manual, Optical zoom: 1.1x. Analog signal format system: NTSC, PAL, PAL 60, SECAM, Supported graphics resolutions: 640 x 480 (VGA), 720 x 480, 720 x 576, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA),..., Supported video modes: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p. Serial interface type: RS-232, HDMI connector type: Full-size



| Projector                                    |  | Network                           |                          |
|--|--|-----------------------------------|--------------------------|
| Screen size compatibility *                  | 762 - 7620 mm (30 - 300")  | Wi-Fi *                           | ✗                        |
| Projection distance                          | 1.1 - 13 m   | Storage                           |                          |
| Projector brightness *                       | 3600 ANSI lumens   | Card reader integrated *          | ✗                        |
| Projection technology *                      | DLP  | Features                          |                          |
| Projector native resolution *                | SVGA (800x600)   | Certification                     | FCC (ICES-003), cTUVus   |
| Native aspect ratio *                        | 4:3  | Multimedia                        |                          |
| Number of colours                            | 1.073 billion colours  | Built-in speaker(s) *             | ✓                        |
| Horizontal scan range                        | 15 - 102 kHz   | RMS rated power                   | 2 W                      |
| Vertical scan range                          | 23 - 120 Hz  | Number of built-in speakers       | 1                        |
| Keystone correction, vertical                | -40 - 40°  | Design                            |                          |
| Matrix size                                  | 1.4 cm (0.55")   | Product type *                    | Standard throw projector |
| Matrix type                                  | DMD  | Product colour *                  | Grey, White              |
| Light source                                 |  | Placement                         | Desktop                  |
| Light source type *                          | Lamp   | Cable lock slot                   | ✓                        |
| Service life of light source *               | 4500 h   | Cable lock slot type              | Kensington               |
| Service life of light source (economic mode) | 15000 h  | Display                           |                          |
| Lamp power                                   | 190 W  | Built-in display *                | ✗                        |
| Lamps quantity                               | 1 lamp(s)  | Power                             |                          |
| Lens system                                  |  | Power source *                    | AC                       |
| Focus *                                      | Manual   | Power consumption (typical) *     | 260 W                    |
| Zoom capability                              | ✓  | Power consumption (standby) *     | 0.5 W                    |
| Zoom type                                    | Manual   | AC input voltage                  | 100 - 240 V              |
| Optical zoom                                 | 1.1x   | AC input frequency                | 50 - 60 Hz               |
| Throw ratio                                  | 1.96 - 2.15:1  | Operational conditions            |                          |
| Video  |  | Operating temperature (T-T)       | 0 - 40 °C                |
| Analog signal format system *                | NTSC, PAL, PAL 60, SECAM   | Operating relative humidity (H-H) | 10 - 90%                 |
| 3D Ready                                     | ✓  | Operating altitude                | 0 - 1499 m               |
| Supported graphics resolutions               | 640 x 480 (VGA), 720 x 480, 720 x 576, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1360 x 768 (WXGA), 1366 x 768, 1400 x 1050 (SXGA+), 1440 x 900 (WXGA+), 1920 x 1200 (WUXGA) | Weight & dimensions               |                          |
| Supported video modes                        | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p   | Width                             | 294 mm                   |
|  |  | Depth                             | 218 mm                   |
|  |  | Height                            | 110 mm                   |
|  |  | Weight *                          | 2.2 kg                   |
|  |  | Package width                     | 365 mm                   |

| Ports & interfaces           |           | Weight & dimensions         |          |
|------------------------------|-----------|-----------------------------|----------|
| HDMI connector type          | Full-size | Package depth               | 188 mm   |
| HDMI version                 | 1.4       | Package height              | 300 mm   |
| Serial interface type *      | RS-232    | Package weight              | 3.24 kg  |
| PC Audio in                  | ✓         | <b>Packaging content</b>    |          |
| PC Audio out                 | ✓         | Remote control included *   | ✓        |
| VGA (D-Sub) ports quantity * | 3         | Cables included             | AC, VGA  |
| HDMI ports quantity *        | 1         | Quick start guide           | ✓        |
| Composite video in *         | 1         | <b>Logistics data</b>       |          |
| DVI port *                   | ✗         | Harmonized System (HS) code | 85286200 |
| AC (power) in                | ✓         | <b>Other features</b>       |          |
| <b>Network</b>               |           | RS-232 ports                | 1        |
| Ethernet LAN *               | ✗         |                             |          |

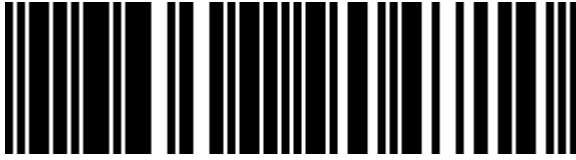

0766907904710



766907904710

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.