

# Philips V Line 271V8LA/00 LED display 68.6 cm (27") 1920 x 1080 pixels Full HD Black

**Brand :** Philips

**Product family:** V Line

**Product code:** 271V8LA/00

**Product name :** 271V8LA/00

271V8LA LCD monitor

Philips V Line 271V8LA/00 LED display 68.6 cm (27") 1920 x 1080 pixels Full HD Black:


Philips V line wide-view monitor gives viewing beyond boundaries, great value with essential features. Adaptive-Sync delivers smooth video display. Features like anti-glare, LowBlue mode and flicker-free for easy-on-the-eyes.

Philips V Line 271V8LA/00. Display diagonal: 68.6 cm (27"), Display resolution: 1920 x 1080 pixels, HD type: Full HD, Display technology: LED, Display surface: Matt, Response time: 4 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in speaker(s). VESA mounting. Product colour: Black



Display		Ergonomics	
Display diagonal *	68.6 cm (27")	On Screen Display (OSD)	✓
Display resolution *	1920 x 1080 pixels	On Screen Display (OSD) languages	Simplified Chinese, Traditional Chinese, Czech, German, Dutch, English, Spanish, Finnish, French, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Swedish, Turkish, Ukrainian
HD type *	Full HD	Number of OSD languages	21
Native aspect ratio *	16:9	Plug and Play	✓
Display technology *	LED	LED indicators	Operation, Stand-by
Panel type *	VA		
Backlight type	W-LED		
Touchscreen *	✗		
Display brightness (typical)	250 cd/m <sup>2</sup>		
Response time *	4 ms		
Display surface	Matt		
Anti-glare screen	✓		
Screen shape *	Flat		
Aspect ratio	16:9		
Contrast ratio (typical) *	3000:1		
Maximum refresh rate *	75 Hz		
Viewing angle, horizontal	178°		
Viewing angle, vertical	178°		
Display number of colours *	16.7 million colours		
Pixel pitch	0.3114 x 0.3114 mm		
Pixel density	82 ppi		
Horizontal scan range	30 - 85 kHz		
Vertical scan range	48 - 75 Hz		
Viewable size, horizontal	59.8 cm		
Viewable size, vertical	33.6 cm		
Digital horizontal frequency	30 - 85 kHz		
Digital vertical frequency	48 - 75 Hz		
Display diagonal (metric)	68.6 cm		
DDC/CI	✓		
Haze rate	25%		
Surface hardness	3H		
		Power	
		Energy efficiency class (SDR) *	E
		Energy consumption (SDR) per 1000 hours *	21 kWh
		Power consumption (typical) *	23.3 W
		Power consumption (standby) *	0.3 W
		Power consumption (off)	0.3 W
		AC input voltage	100 - 240 V
		AC input frequency	50 - 60 Hz
		Power supply type	Internal
		Energy efficiency scale	A to G
		European Product Registry for Energy Labelling (EPREL) code	400145
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-20 - 60 °C
		Operating relative humidity (H-H)	20 - 80%
		Operating altitude	0 - 3658 m
		Non-operating altitude	0 - 12192 m
		Weight & dimensions	
		Width (with stand)	613 mm

<b>Display</b>		<b>Weight &amp; dimensions</b>	
Display sRGB	✓	Depth (with stand)	231 mm
<b>Performance</b>		Height (with stand)	456 mm
NVIDIA G-SYNC *	✗	Weight (with stand)	3.96 kg
AMD FreeSync *	✗	Width (without stand)	613 mm
VESA Adaptive Sync support	✓	Depth (without stand)	45 mm
Component video sync	Separate sync, Sync-on-green (SOG)	Height (without stand)	363 mm
Flicker-free technology	✓	Weight (without stand)	3.5 kg
Low Blue Light technology	✓	<b>Packaging data</b>	
<b>Multimedia</b>		Package width	730 mm
Number of speakers	2	Package depth	123 mm
RMS rated power	4 W	Package height	446 mm
Built-in speaker(s) *	✓	Package weight	5.55 kg
Built-in camera *	✗	Package type	Box
<b>Design</b>		<b>Packaging content</b>	
Market positioning *	Home	Stand included	✓
Product colour *	Black	Cables included	HDMI, AC
<b>Ports &amp; interfaces</b>		Manual	✓
Built-in USB hub *	✗	<b>Other features</b>	
VGA (D-Sub) ports quantity	1	Exterior finish type	Textured
DVI port	✗	Picture enhancement	SmartImage
HDMI *	✓	Recyclable packaging material	100%
HDMI ports quantity	1	Regulatory Approvals	UKRAINIAN; CB; TUV Ergo; TUV/GS; EAEU RoHS; CU-EAC; CE Mark
Audio output	✓	Heavy metals free	Hg (mercury)
<b>Ergonomics</b>		EasyRead mode	✓
VESA mounting *	✓	LowBlue mode	✓
Panel mounting interface	100 x 100 mm	Compliance certificates	RoHS
Cable lock slot *	✓	Mean time between failures (MTBF)	50000 h
Cable lock slot type	Kensington	Certification	UKRAINIAN, CB, TUV Ergo, TUV/GS, EAEU RoHS, CU-EAC, CE Mark
Height adjustment *	✗	<b>Logistics data</b>	
Tilt adjustment	✓	Harmonized System (HS) code	85285210
Tilt angle range	-5 - 20°		

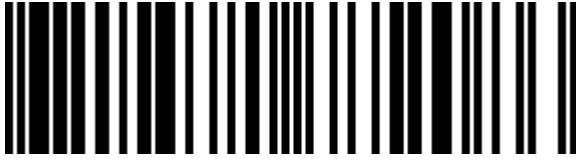

8712581772086

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 04-NOV-2024. Prints or copies of Information are only valid on the printed Publication date