Philips 43BDL3511Q/00 Signage Display Digital A-board 109.2 cm (43") 400 cd/m² 4K Ultra HD Black 18/7

Brand : Philips

Product code: 43BDL3511Q/00

Product name : 43BDL3511Q/00

- Easy-setup 18/7 display
- 43"
- Direct LED Backlight
- Ultra HD

43'' Ultra HD 3840 x 2160 IPS, 400 cd/m², 16:9, Response 8ms, 1200:1, 1.07 Billion, DVI-I, USB, HDMI, IR in/out, RS232C, RJ-45, 18/7
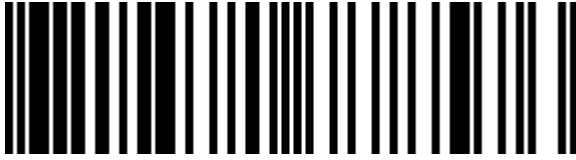
Philips 43BDL3511Q/00. Product design: Digital A-board. Display diagonal: 109.2 cm (43"), Display resolution: 3840 x 2160 pixels, Display brightness: 400 cd/m², HD type: 4K Ultra HD. Operating hours (hours/days): 18/7. Product colour: Black

Display

Panel type	IPS
LED backlighting type	Direct-LED
Display diagonal *	109.2 cm (43")
Display resolution *	3840 x 2160 pixels
Display brightness *	400 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✘
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.2451 x 0.2451 mm
Display diagonal (metric)	108 cm
Haze rate	1%

Ports & interfaces

HDMI ports quantity *	2
HDMI version	2.0
HDMI input ports quantity	2
DVI port *	✔
DVI-I ports quantity	1
USB port *	✔
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital A-board
Placement supported *	Indoor

Design

Product colour *	Black
VESA mounting *	✔
Panel mounting interface	200 x 200 mm
Bezel width (bottom)	1.39 cm
Bezel width (side)	1.39 cm
Bezel width (top)	1.39 cm

Performance

Purpose *	Commercial
Operating hours (hours/days)	18/7
Mean time between failures (MTBF)	50000 h

Power

Power consumption (typical) *	105 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	105 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Computer system

Video formats supported	H.264, MPEG, WMV3
Audio formats supported	AAC, HE-AAC, WMA
Image formats supported	BMP, JPG, PNG

Weight & dimensions

Display width	973 mm
Display depth	63.5 mm
Display height	561.2 mm
Display weight	10.7 kg

Packaging content

Cables included	AC, IR sensor, RS-232, USB

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Logistics data

Harmonized System (HS) code	85285210

Design

Orientation	Horizontal/Vertical

8712581778576