IMPACT DW

When work means talk choose a wireless DECT solution that drives excellent customer experiences. Optimize your calls with premium audio from EPOS' unique technologies and enjoy design that provides all-day user comfort.





DW Pro 2

EPOS

Key Features

Talk all day in comfort

With up to 12 hours talk time and lightweight, double-sided headset with extra soft ear pads

Enjoy wireless freedom and single-connectivity

With wireless reach of up to 180 m/590 ft and the exibility of dualconnectivity to both desk phone and PC/softphone

Ensure premium audio for excellent call quality

Maximize speech intelligibility with EPOS Voice™ and an ultra-noise noise-cancelling microphone

Easy magnetic docking and charging

Dock the headset to the magnetic charge interface and be sure it's charged and ready to go for your next call

Get a premium look and performance


With an iconic design that combines style with functionality

See more at eposaudio.com/adapt-dw


What's in the Box



How to Use the IMPACT DW

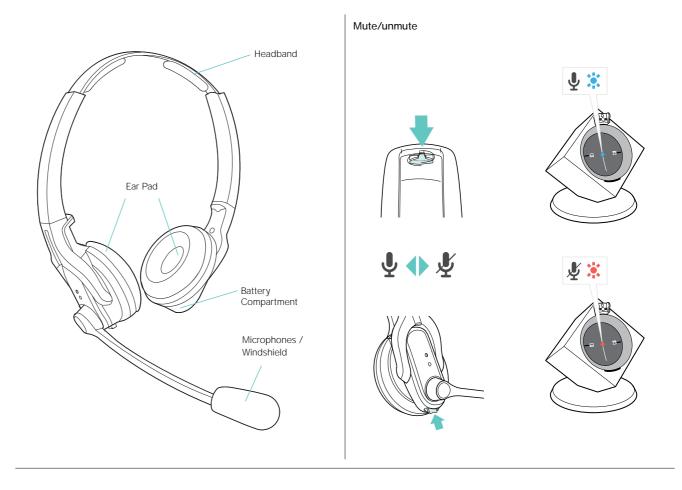

Adjusting the volume









Additional bene ts & features



Get a premium look and performance Iconic design that combines style with functionality



Enable seamless call management Intuitive interface to answer/end calls*, mute and control volume



Stay mobile with fast charging 50% battery charges in just 20 minutes



Eliminate Wi-Fi interference
DECT protected frequency band enabling increased number of headset users



Secure your conversation
E ective and e cient encryption of all your calls



Engage easily in phone conferences Intuitive, easy setup of up to 4 headsets with the same base station



Simple hot desking

Fast, secure pairing – simply dock headset in the base station



Protect your hearing
From acoustic shock with EPOS
ActiveGard® technology

Product data

1/3

General		
DECT	1.880 to 1.900 MHz (EU, UK, AUS) 1.920 to 1.930 MHz (US) - DECT 6.0	
Wearing style	Headband – single-sided and ear hook. Neckband optional* (DW O ce variants) Headband – single-sided (DW Pro 1 variants) Headband – double-sided (DW Pro 2 variants)	
Headset weight	24 g / 0.86 oz (DW O ce ear hook) 50 g / 1.76 oz (DW O ce headband) 65 g / 2.28 oz (DW Pro 1 variants) 85 g / 2.98 oz (DW Pro 2 variants)	
Connectivity	Desk phone, softphone/PC, dual device connectivity	
Warranty	2 years	
Audio		
Speaker frequency response	150 Hz – 6.8 kHz (Wideband) 300 Hz – 3.5 kHz (Narrowband)	
Microphone type	Noise-cancelling microphone (DW O ce variants) Ultra noise-cancelling microphone (DW Pro 1 & Pro 2 variants) 44	
Microphone frequency range	150 Hz – 6.8 kHz (Wideband) 300 Hz – 3.5 kHz (Narrowband)	
Noise cancellation	Noise-cancelling or ultra noise-cancelling microphone	

Product data

2/3

EPOS Manager

PC Software

Technical	
Charging time	O – 50%: 20 minutes O – 100%: 1 hour
Standby time	Up to 100 hours
Battery time	Up to 8 hours (Wideband Mode) Up to 12 hours (Narrowband Mode)
Range	Line of sight: 180 m / 590 ft Typical o ce building: 55 m / 180 ft
Product variants	What's in the box
IMPACT DW OFFICE ML	Headset (with name plate for ear hook and distance holder), base station, power supply, USB cable, audio phone cable, headband (detachable), ear hook adapter with pre-mounted ear hook with leatherette sleeve and earbud size S, extra earbuds size M and L, name plate holder for headband and name plate instruction, printed quick guide, printed safety guide, compliance sheet
IMPACT DW Pro 1 ML / DW Pro 2 ML	Headset, base station, power supply, USB cable, audio phone cable, printed quick guide, printed safety guide, compliance sheet
Software	
EPOS devices can be managed with following Software solutions:	
EPOS Connect	Conduct rmware updates and con gure headsets for personal audio preferences. EPOS Connect works for Windows, Mac® and VDI/Thin client environments: eposaudio.com/software-epos-connect

For other relevant PC software, please check: eposaudio.com/software

Manage, update and con gure EPOS audio devices from any location - For both cloud and on-premises solutions: eposaudio.com/software-epos-manager

Product data

3/3

Connects to	Certi cations	EAN code	UPC code
Desk phone, PC/Softphone	Optimized for UC and certi ed for Avaya, Alcatel-Lucent Enterprise, Enreach	57 14708 00330 4	8 40064 40330 6
Desk phone, PC/Softphone	Optimized for UC and certi ed for Webex, Avaya, Alcatel-Lucent Enterprise, Enreach	57 14708 00334 2	8 40064 40334 4
Desk phone, PC/Softphone	Optimized for UC and certi ed for Webex, Avaya, Alcatel-Lucent Enterprise, Enreach	57 147O8 OO338 O	8 40064 40338 2
	Desk phone, PC/Softphone Desk phone, PC/Softphone	Desk phone, PC/Softphone Optimized for UC and certi ed for Avaya, Alcatel-Lucent Enterprise, Enreach Desk phone, PC/Softphone Optimized for UC and certi ed for Webex, Avaya, Alcatel-Lucent Enterprise, Enreach Desk phone, PC/Softphone Optimized for UC and certi ed for Webex,	Desk phone, PC/Softphone Optimized for UC and certi ed for Avaya, Alcatel-Lucent Enterprise, Enreach Desk phone, PC/Softphone Optimized for UC and certi ed for Webex, Avaya, Alcatel-Lucent Enterprise, Enreach Desk phone, PC/Softphone Optimized for UC and certi ed for Webex, 57 14708 00334 2 Optimized for UC and certi ed for Webex, 57 14708 00338 0

Spare parts

1/1

Product	Art. no.	Description	EAN code	UPC code
USB-A to USB-C	1000832	Adapter Cable USB-A To USB-C	5714708006336	840064406338
HZP 46 Black	1000803	Large, leatherette ear pad covers and foam ear pads in black. Suitable for SC 40/70 Series. Includes 2 pieces of ear pad covers and 2 pieces of foam ear pads.	5714708006022	840064406024

Appendix

1/1

Additional product data

Color	Black with silver		
Ear pad size	ø 50 mm / 1.96 in		
Personalization	Yes, with nameplate on headset		
Temperature range	Operational: +5 C to 45 C / +41 F to +113 F Storage: -20 C to 70 C / -4 F to +158 F		
Battery (Lithium Polymer)	Exchangeable for service (see User manual)		
Automatic power adjustment	Yes (distance between headset and base)		
Speaker type	High-quality neodymium magnet speaker for outstanding audio quality		
EPOS ActiveGard® technology	Protects users against acoustic injury caused by sudden sound burst on the line		
EPOS Voice™ technology	For a clear and natural listening experience		
EU*/AUS Limiter depending on regional variant	Enhanced audio protection preventing listening fatigue, average 85 dB over a workday. Activated by DIP switch, EPOS Connect and EPOS Manager		

^{*} In compliance with EU Noise at Work legislation (Directive 2003/10/EC), that sets limits for two types of noise in the workplace: Acoustic burst and Sustained noise.