Philips Signage Solutions 49BDL2105X/00 Signage Display 123.2 cm (48.5") IPS 500 cd/m² Full HD Black 24/7

Brand : Philips

Product family: Signage Solutions

Product code: 49BDL2105X/00

Product name :
49BDL2105X/00

Philips Signage Solutions 49BDL2105X/00. Display diagonal: 123.2 cm (48.5"), Display technology: IPS, Display resolution: 1920 x 1080 pixels, Display brightness: 500 cd/m², HD type: Full HD. Operating hours (hours/days): 24/7. Product colour: Black
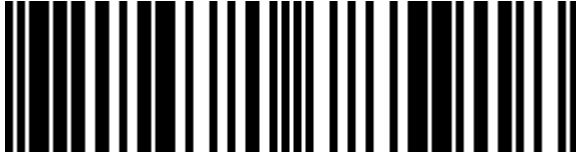
Display

LED backlighting type	Direct-LED
Display diagonal *	123.2 cm (48.5")
Display technology *	IPS
Display resolution *	1920 x 1080 pixels
Display brightness *	500 cd/m²
HD type *	Full HD
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1100:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.55926 x 0.55926 mm
Display diagonal (metric)	123 cm
Transparency	3%

Ports & interfaces

HDMI ports quantity *	2
HDMI version	2.0
HDMI input ports quantity	2
DVI port *	✔
DVI-D ports quantity	1
VGA (D-Sub) input ports	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
USB port *	✔
USB ports quantity	1
USB version	2.0
USB connector type	USB Type-A
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	2
Audio (L/R) in	1
Audio (L/R) out	1
Remote (IR) input	1
Remote (IR) output	1
OPS module slot	✔

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	400 x 400 mm
Mounting type	Wall

Performance

On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish
Operating hours (hours/days)	24/7
Mean time between failures (MTBF)	50000 h

Power

Power consumption (typical) *	100 W
Power consumption (standby) *	0.5 W

Weight & dimensions

Display width	1077.6 mm
Display depth	93.1 mm
Display height	607.8 mm
Display weight	21.7 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	DisplayPort, AC, IR sensor, LAN (RJ-45)

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Certificates

Certification	CE FCC Class A Restriction of Hazardous Substances (ROHS) CB ETL BSMI

0685417589180

685417589180

8712581785918