



SLOT IN PCS

VPC25-W53-O1-1B


Key Features

- Ideal Integrated Solution for ViewBoard® Interactive Displays & Commercial Displays
- Powerful Intel® 10th Core Processors
- Improved System Stability, Security, & Thermal Control



Product Description

Seize the power to get more done when you sync your ViewBoard® interactive displays and wireless presentation display with the ViewSonic VPC25-W53-O1-1B slot-in PC. Integrated with exceptional performance from Intel® 10th Gen Core™ processors, up to 16GB DDR4 memory, and up to 256GB of SSD storage, experience enhances computing performance to breeze through complex classes and collaborations. Plug into pure productivity with dual-band WiFi, Bluetooth 5.2, and a range of ports, including 4K HDMI, DP1.2, USB 3.0, and Gigabit LAN RJ45 for faster workflows.

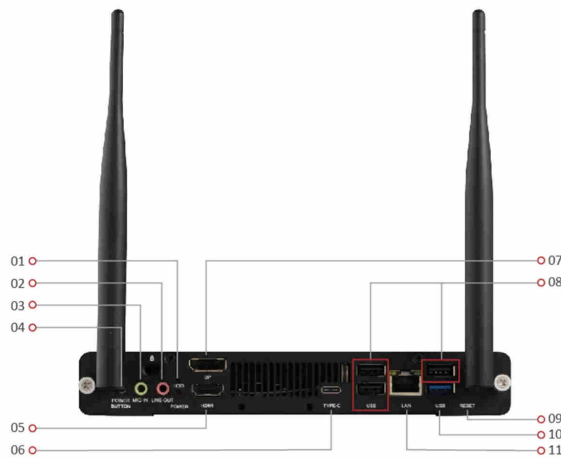

- | | |
|-------------------|-------------|
| 01. HDD/Power LED | 08. USB 2.0 |
| 02. LINE-OUT | 09. Reset |
| 03. MIC-IN | 10. USB 3.2 |
| 04. Power Button | 11. LAN |
| 05. HDMI | |
| 06. Type C | |
| 07. DP | |

Visit Us www.viewsonic.com

CORE

CPU:	Intel 10th Gen. Comet Lake series i5-10400T
Graphics:	Integrated Intel® UHD Graphics 630 Intel H510 chipset supports two screens output at the same time

MEMORY

Type:	DDR4
Capacity:	16GB

SOFTWARE

Operating System:	Windows 10 Pro 64 bit
-------------------	-----------------------

STORAGE

Dimension:	M.2 2280 (22 x 80 mm)
Capacity:	256GB SSD
Interface:	M.2 2280 NVMe PCIe Gen3 SSD

INPUT

MIC(Microphone):	x1
------------------	----

OUTPUT

DisplayPort:	x 1 (1.2, resolution 3840x2160@60Hz)
HDMI:	x 1 (1.4, resolution 3840x2160@60Hz)
Audio:	x 1 Line out

LAN

RJ45:	GbE LAN Port
-------	--------------

WIRELESS / BLUETOOTH

Intel AX200 WiFi 6 / BT5.1

USB

Type A:	USB 3.0 x 1, USB 2.0 x 2
Type C:	x 1 (data only)

SUPPORT MEDIA FORMAT

Video format:	Container: ASF, WMA, WMV, WM, ASX, WAX, WVX, WMX, WPL, WMD, AVI, MPG, MPEG, M1V, MP2, MP3, MPA, MPE, M3U
Image format:	Container: JPG, JPEG, JPE, JFIF, BMP, DIB, PNG, GIF, TIF, TIFF
Audio codec:	Container: MID, MIDI, RMI, AIF, AIFC, AIFF, WAV, CDA

BUNDLE SOFTWARE

Adobe Reader
myViewBoard for Windows
FinchGuard

POWER

Voltage:	DC in: 12V~19V, 3.42A
Consumption:	65W

OPERATING CONDITIONS

Temperature (° C):	-5°C to 45°C
Humidity:	20% ~ 80% R.H. Non-Condensing

DIMENSIONS(W X H X D)

Physical (inch / mm):	7.95" x 4.69" x 1.18"/202 x 119 x 30 mm
Packaging (inch / mm):	10.00" x 7.72" x 3.03"/254 x 196 x 77 mm

WEIGHT

Net (lb / kg):	2.205 lb/1 kg
Gross (lb / kg):	2.646 lb/1.2 kg

REGULATIONS

cULus, FCC, FCC ID, CA IC, IRAM, CNC, NOM, COFETEL, CE, CB, CE RED, RoHS, ErP, REACH, WEEE, BSMI, NCC, BIS, WPS, RCM

PACKAGE CONTENTS

1. VPC25-W53-O1-1B
2. Quick Start Guide
3. Screw x 2