


The well-processed fan structure and unique shape of fine craftsmanship bring the fan quality to the next level.





HYDRAULIC

BEARING FAN

OUTSTANDING PERFORMANCE

1000

LED: ARGB port (3pin)

turn it into LED control.)

Fan Type

Dimensions

Bearing Type

LED Type

Fan Speed

Airflow

Air Pressure

Lifespan

Connector

Rated Voltage

Rated Current

Warranty

UPC#

Operation Voltage

Fan Noise Level

DC-IN: SATA Power Connector

LED CTRL: External LED Connector

(Or connect it to the reset hub and

1500

Competitor's Product

500

FAN SPEED

2000




AIR VOLUME

1500

RPM

2000

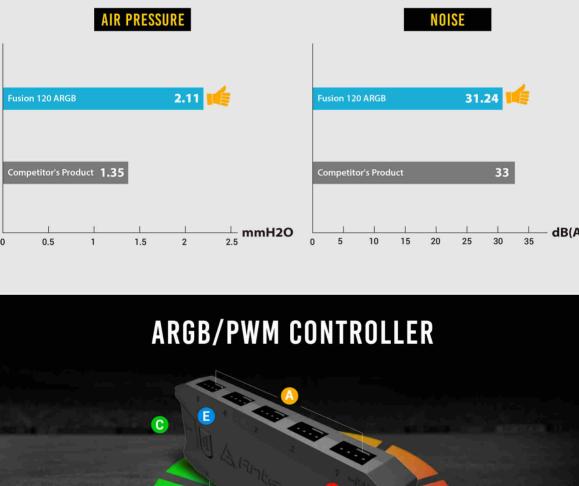

LED SPEED: Control the speed of lighting effects. FAN: PWM Port (4pin) (Low/Mid/High)

STUNNING ARGB LIGHTING EFFECTS & MASSIVE AIRFLOW

PACKAGE

D

PWM LED: External Signal Conecctor

MODE: Switch the lighting effects

(Connect the motherborad for ARGB & PWM functions.



SPECIFICATION

PWM Fan

1 WW L GIT
120 x 120 x 25 mm (DWH)
Hydraulic Bearing
Addressable RGB
600±200-2000±10% RPM
57.93 CFM (max.)
2.11 mmH₂O (max.)
17.02-31.24 dB(A)
40,000 hours / hrs 25°c
FAN: 4-pin PWM, LED: 3-pin
FAN: DC 12 V, LED: DC 5 V
FAN: DC 6.0-13.8 V, LED: DC 4.5-5.5 V
FAN : ≤ 0.21 A, LED : ≤ 0.58 A
2 Years