


XXcm USB 2.0 Power Delivery(5A) C to C Cable - M/M

USB2C5CXXM

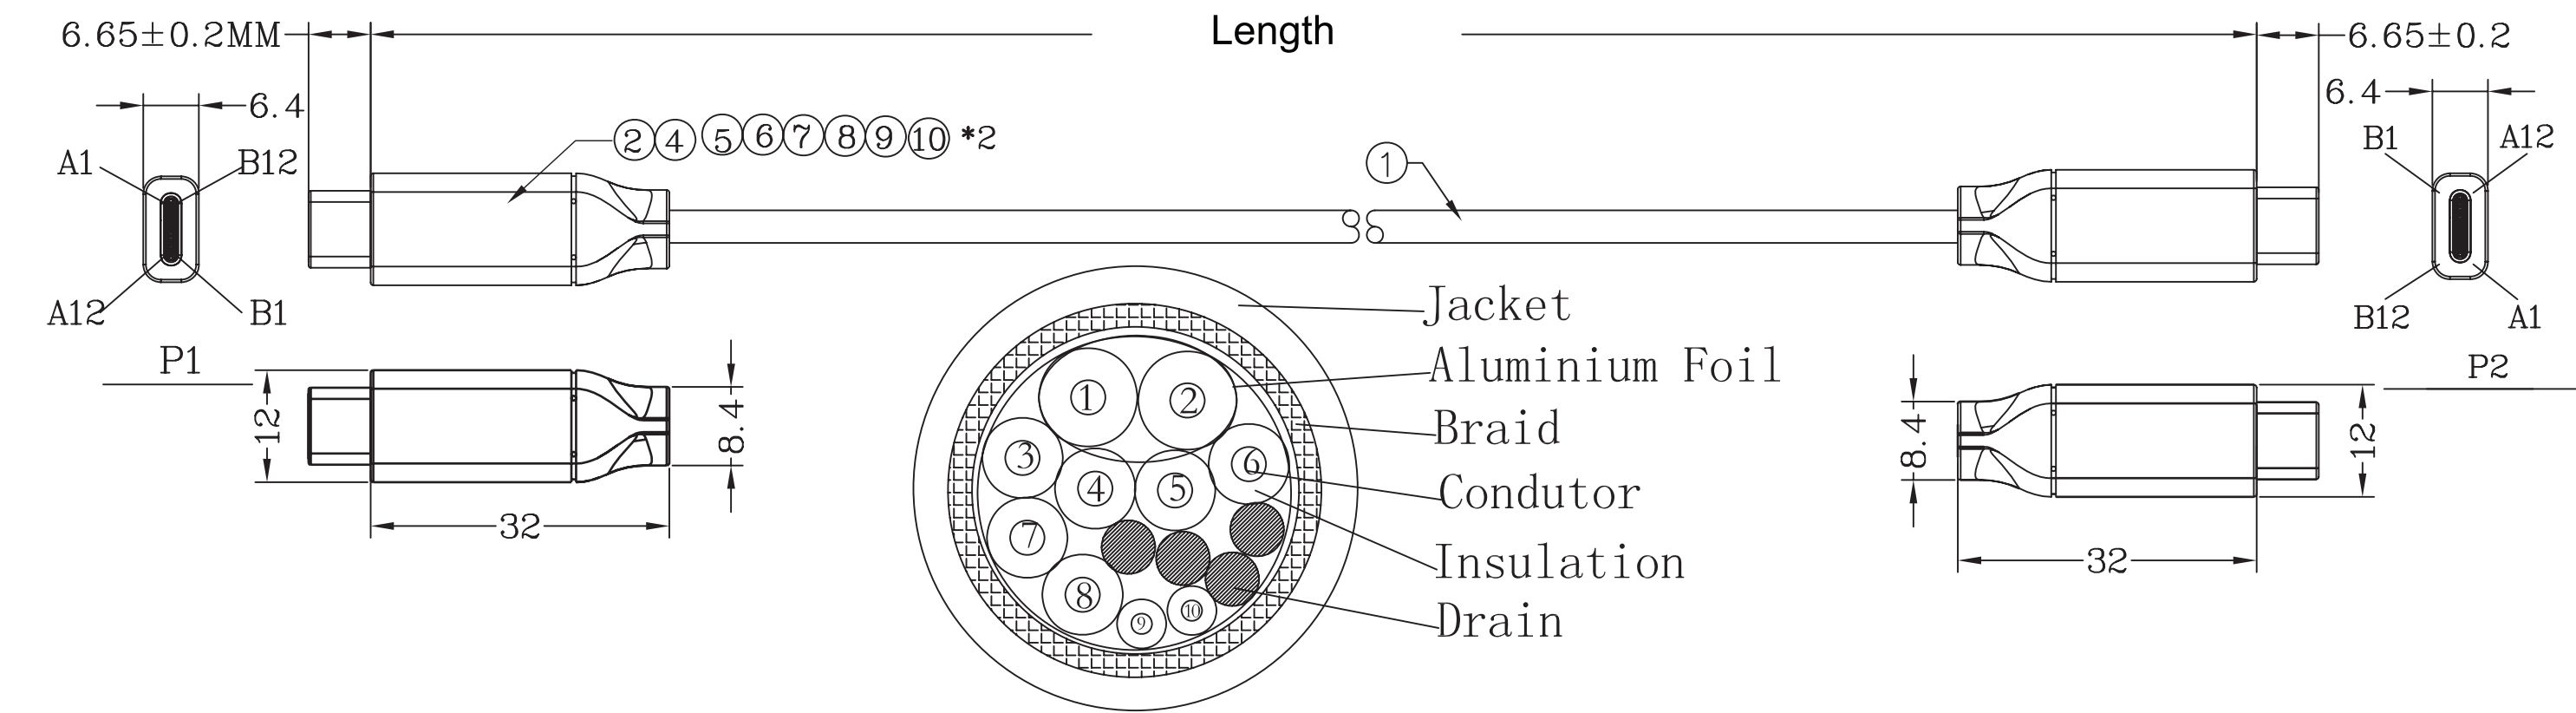

ELECTRICAL TEST:

1.100% OPEN SHORT SHORT & MIS WIRE TEST

2.CONTACT RESISTANCE:3 OHM(MAX)

3.INSULATION RESISTANCE:10M OHM(MIN)

4.HI-POT TEST:DC 300V/10ms

P/N	Length (xx)	Tolerance
USB2C5C50CM	50CM	+/- 30mm
USB2C5C1M	1M	+/- 30mm
USB2C5C2M	2M	+/- 30mm
USB2C5C3M	3M	+/- 40mm

⑨	W=5MM 25u Copper foil	0.024	M
⑧	USB TYPE C~Solder~Tinplate On the cover Nickel plated	2	PCS
⑦	USB TYPE C~Solder~Tinplate Under cover Nickel plated	2	PCS
⑥	45P Black PVC	16	g
⑤	Low pressure internal mold hardness :40~48D, UL94V-0	1	g
④	H.S.T ϕ 1.5 *12mm*2PCS	0.012	M
③	TYPEC-USB2.0 C Type Connector With~PCB+IC(VL151) ~Shell nickel plated~	1	SET
②	TYPEC-USB2.0 C Type Connector With~PCB~shell nickel plated~	1	SET
①	NO~UL~{26AWG (7/0.16TC)*1P+AL}+24AWG (26/0.10TC)*6C+30AWG (7/0.10TC)*2C+4E (26/0.10TC) +AB(16/9/0.10TC 85%TC)~OD:5.0MM~Jacket color:Black	3.0	M
NO	DESCRIPTION	Q'TY	UNIT

