



## APC Smart-UPS 5000VA 230V Rackmount/Tower

Brand : APC

Product code: SUA5000RM15U

Product name : Smart-UPS 5000VA 230V  
Rackmount/Tower



Smart-UPS 5000VA 230V Rackmount/Tower

[APC Smart-UPS 5000VA 230V Rackmount/Tower:](#)


Intelligent and efficient network power protection from entry level to scalable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other network devices.

APC Smart-UPS 5000VA 230V Rackmount/Tower. UPS topology: Line-Interactive, Output power capacity: 5 kVA, Output power: 4000 W. AC outlet types: C13 coupler, C19 coupler, Power plug: Hard Wire 3-wire, AC outlets quantity: 10 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 1632 VAh, Typical backup time at full load: 9.4 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 5U. Width: 483 mm, Depth: 660 mm, Height: 222 mm



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount/Tower
Output power capacity *	5 kVA	Rack capacity	5U
Output power *	4000 W	Product colour *	Black
Waveform *	Sine	LED indicators	Battery replacement
Input operation voltage (min) *	151 V	Certification	C-tick, CE, EN 50091-1, EN 50091-2, GOST, GS Mark, VDE, REACH, PEP, EOL
Input operation voltage (max) *	302 V		
Input frequency *	50/60 Hz		
Output operation voltage (min)	220 V		
Output operation voltage (max)	240 V		
Output frequency regulation	47 - 53 Hz		
Automatic Voltage Regulation (AVR)	✓		
Surge energy rating	480 J		
Hold time (min)	2 ms		
Hold time (max)	4 ms		
Number of output phases	1		
Efficiency	96%		
Noise level	53 dB		
Surge protection	✓		
Audible alarm(s)	✓		
Auto-restart	✓		
Ports & interfaces		Operational conditions	
AC outlet types	C13 coupler, C19 coupler	Operating temperature (T-T)	0 - 40 °C
Power plug	Hard Wire 3-wire	Storage temperature (T-T)	-15 - 45 °C
AC outlets quantity	10 AC outlet(s)	Operating relative humidity (H-H)	0 - 95%
Number of output IEC jumpers	4	Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 9000 m
		Non-operating altitude	0 - 15000 m
Battery		Technical details	
Battery technology	Sealed Lead Acid (VRLA)	Compliance certificates	RoHS
Battery capacity	1632 VAh	Weight & dimensions	
		Width	483 mm
		Depth	660 mm
		Height	222 mm
		Weight	97.7 kg
		Package width	610 mm
		Package depth	762 mm
		Package height	635 mm
		Package weight	106.8 kg
		Packaging data	
		Rack mount kit	✓
		Cables included	RS-232

Battery		Packaging data	
Typical backup time at full load	9.4 min	Manual	✓
Typical backup time at half load	26.7 min	Quick installation guide	✓
Battery life (max)	5 year(s)	Software CD	✓
Battery recharge time	3 h	<b>Logistics data</b>	
Hot-swap battery	✓	Products per pallet	4 pc(s)
Automatic battery test	✓	Harmonized System (HS) code	85078000
Cold start	✓	Products per master (outer) case	1 pc(s)
		<b>Other features</b>	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Web/SNMP Management Card

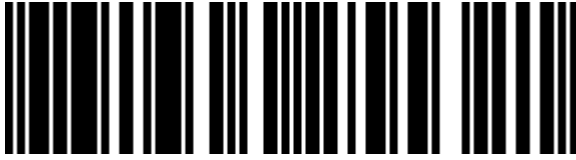

0731304255321



731304255321

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 13-NOV-2024. Prints or copies of Information are only valid on the printed Publication date