

8-Port USB DVI KVM Switch

CS1768

- The CS1768 8-port USB DVI KVM Switch is a multi-purpose appliance that consolidates access and control of up to 8 computers from a single USB keyboard, USB mouse, and dual-monitor (DVI-I and VGA) console.

It can be cascaded to three levels – allowing up to 73 CS1768s to control up to 512 computers – all from the original single console, making it ideal for industry-grade IT applications and management.

In addition, the CS1768 features Multi-Display functionality, which enables the use of standard USB cables to stack up to four switches for quad-displaying in multiple-monitor installations where each computer is fitted with multiple video cards. It allows you to contrast, analyse and monitor video output in convenient ways, substantially simplifying the working environment.

Furthermore, the CS1768 comes with ATEN's on-screen display (OSD) function, which can access any computer connected to the installation, it also offers OSD configuration back up/restore to save/ back up the OSD settings and restore them as needed.

The CS1768 provides multimedia keyboard support and is audio enabled. Two microphones can provide audio input to each of the computers, and you can listen to the audio output of each computer on two sets of speakers (on a one-at-a-time basis).

CS1768 front view



CS1768 rear view



Features


- One USB console controls eight Single Link DVI or VGA computers and two additional USB 2.0 devices
- [Supports a digital \(DVI\) or analog \(VGA\) video output](#)
- [Cascadable to three levels – control up to 512 computers](#)
- [Multi-Display – stack up to four CS1768 units and display video from up to four monitors \(dual display / triple display / quad display\)](#)
- Computer selection via front panel pushbuttons, hotkeys, and multilingual on-screen display (OSD)
- [OSD Backup/Restore function – enables the administrator to back up the switch's configuration and user profile information](#)
- 2-port USB 2.0 hub built in
- Fully compliant with the USB 2.0 specification

- [Two-level \(Administrator/User\) password authorization for enhanced security protection](#)
- [Multilingual OSD supports English, German, Japanese, Traditional Chinese, Simplified Chinese, Spanish, Russian, and French](#)
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- [Console audio ports on front panel for easy access](#)
- Multiplatform support – Windows, Linux, Mac, Sun
- Supports widescreen resolutions
- Superior video quality – 1920 x 1200 (Single Link DVI); 2048 x 1536 (VGA); DDC2B
- Independent switching of KVM and USB focus
- DVI digital and analog monitor support – fully compliant with the DVI specifications
- HDCP compatible
- [Video DynaSync™ – exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports](#)
- Console mouse port emulation/bypass feature supports most mouse drivers and multifunction mice Chinese, and Spanish
- Complete keyboard emulation for error-free booting
- Mac/Sun keyboard support and emulation*
- Multilingual keyboard mapping – supports English (US), English (UK), French, German, Japanese, Korean, Traditional
- Auto Scan Mode for monitoring all computers
- Broadcast mode – allows you to send commands from the console to all computers to perform operations simultaneously.
- Firmware upgradable

Note: PC keyboard combinations emulate Mac/Sun keyboards; Mac/Sun keyboard work only with their own computers

Benefits

Flexibility	Support for digital (DVI single-link) as well as analog video (VGA), allows mixed operation.
Easy Operation	<ul style="list-style-type: none"> • Computer selection via front panel pushbuttons, hotkeys, and multilingual on-screen display (OSD) menu • Multilingual keyboard mapping – supports English (US), English (UK), French, German, Japanese, Korean, Traditional Chinese, and Spanish.
Auto Scan and Broadcast Mode	<ul style="list-style-type: none"> • Auto Scan Mode for monitoring all computers • Broadcast mode sends commands from the console to all computers, allowing you to perform operations (such as software installation, upgrades, shutdowns, etc.) on them simultaneously
Multi-Display	stack up to four CS1768 units and display video from up to four monitors (dual display / triple display / quad display)
Superior Video Quality	Maximum DVI single-link resolution 1920x1200; Maximum VGA resolution 2048 x1536.
Video DynaSync™	Exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports.
OSD Backup/Restore	enables the administrator to back up the switch's configuration and user profile information

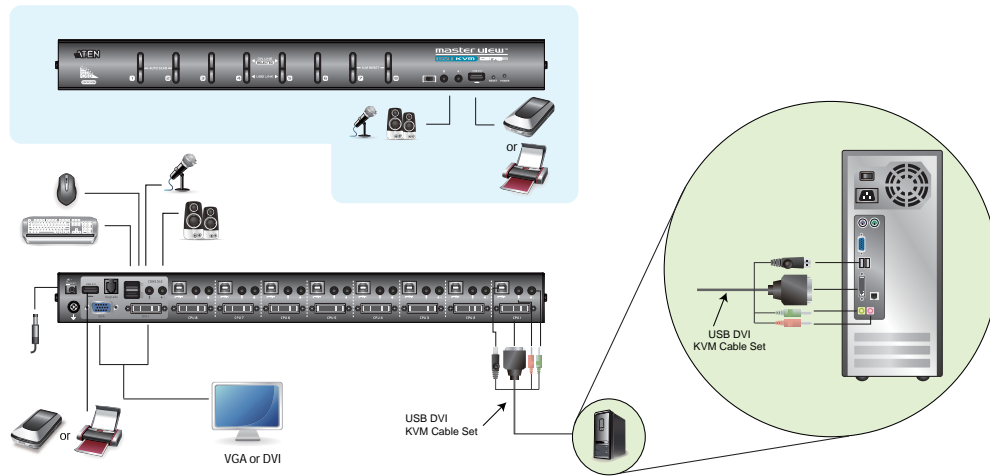

Specifications

Function	CS1768
Computer Connections	
Direct	8
Maximum	512 (via Cascade)
Port Selection	OSD, Hotkey, Pushbutton
Connectors	
Console Ports	1 x HDB-15 Female (Blue); 1 x DVI-I Female (White); 2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)
KVM Ports	8 x DVI-I Female (White); 8 x USB Type B Female 8 x 3.5mm Audio Jack Female (Pink); 8 x 3.5mm Audio Jack Female (Green)
Firmware Upgrade	1 x RJ-11 Female (Black)
Power	1 x DC Jack
USB Hub	2 x USB Type A Female (1 x front, 1 x rear)
Switches	
Port Selection	8 x Pushbutton
Reset	1 x Semi-recessed Pushbutton
Firmware Upgrade	1 x Slide Switch
LEDs	
Online / Selected	8 (Orange)
Power	1 (Dark Green)
USB Link	8 (Green)
Emulation	
Keyboard / Mouse	USB
Video	DVI (Single Link): 1920 x 1200 @ 60Hz; VGA: 2048 x 1536 @ 60Hz
Scan Interval	1–255 seconds (default: 5 sec)
Power Consumption	DC5.3V: 4.53W: 47BTU
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	2.80 kg
Dimensions (L x W x H)	43.72 x 16.12 x 4.40 cm

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 03/2020 V5.0



© Copyright 2020 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.