


6.5ft. (2 m) DisplayPort 1.4 Cable - VESA® Certified

DP14MM2M

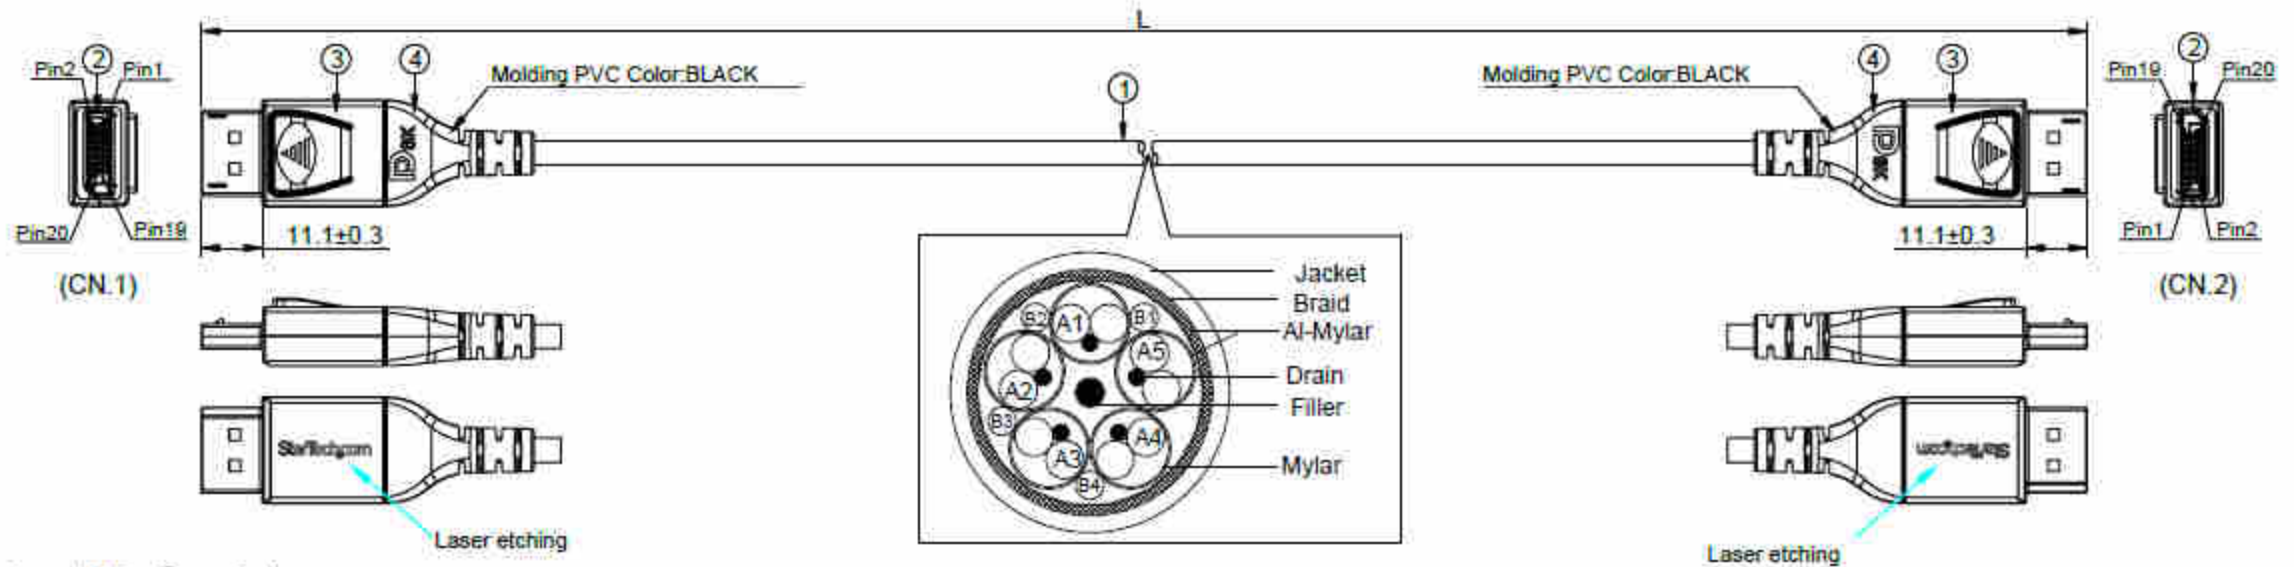

(A). Wire Pin Assignment and Wire Description.

CN.1	PAIR#	CN.2	COLOR	
1	X	12	BLUE	red mylar
3		10	WHITE	
2	X	11	DRAIN	yellow mylar
4		9	BLUE	
6	X	7	WHITE	orange mylar
5		8	DRAIN	
7	X	6	BLUE	blue mylar
9		4	WHITE	
8	X	5	DRAIN	green mylar
10		3	BLUE	
12	X	1	WHITE	
11		2	DRAIN	
13	SIGNAL	13	GREEN	
14	SIGNAL	14	RED	
15	X	15	BLUE	
17		17	WHITE	
18	X	16	DRAIN	
18		SIGNAL	18	
19	SIGNAL	19	BLUE	
SHELL		SHELL	BRAID	

Length table:

Part NO.(F)	Length:mm
DP14MM1M	1000±30
DP14MM2M	2000±50

(B). Electrical Testing :

- OPEN/SHORT:100% Testing Line-Process:
- HI-POT: 100V AC/0.1sec.
- INSULATION RESISTANCE:10MQ(MIN) 100V DC
- CONDUCTION RESISTANCE:3Ω(MAX)

④	MOLDING:PVC BLACK
③	DISPLAYPORT TOP/LOWER CASING:PC BLACK
②	DISPLAYPORT 20PIN PLUG,TERMINAL Au-PLATED SHELL Au-PLATED
①	DP CABLE [(34AWGx2C+EAM)x5P+34AWGx4C]+AB OD:4.5 Braid:95% BLACK PVC
ITEM	MATERIALS LIST & SPEC. DESCRIPTION