



USB to Lightning™ Cable - Angled - 1m (3.3ft) / 2 m (6.6 ft.) - White

RUSBLTMMxxMWR

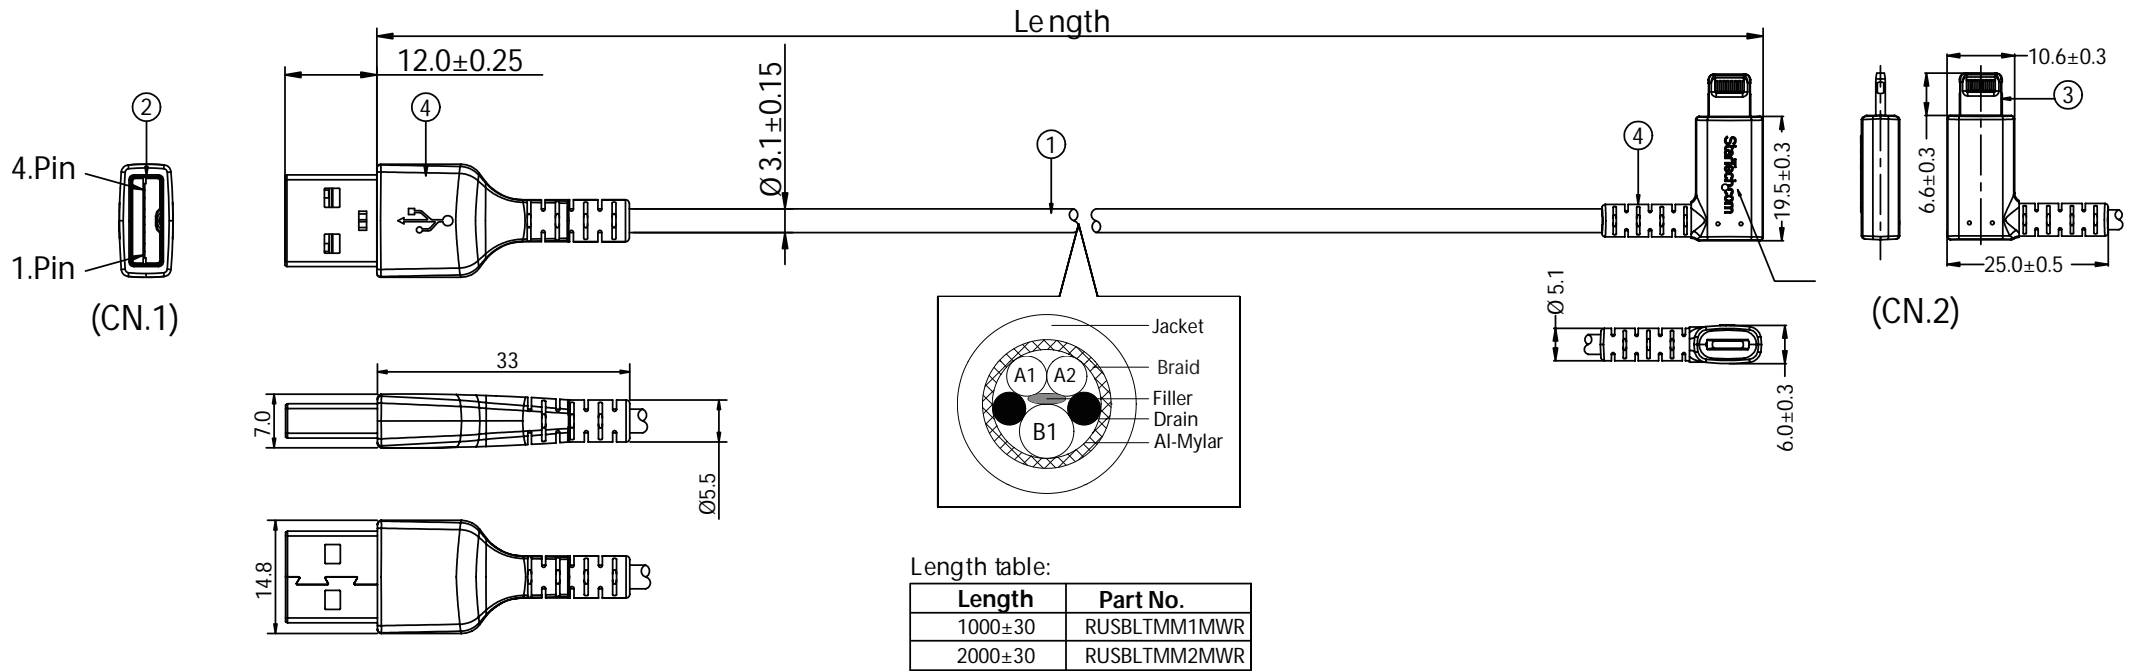

(A). Wire Pin Assignment and Wire Description.

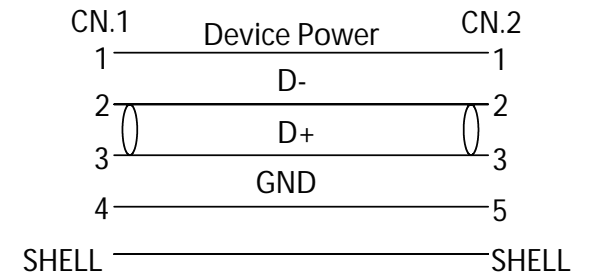

(B). Electrical Testing :

- a. Open/Short:100%. Testing Line-Process.
- b. HI-POT: 100V AC/0.1sec.
- c. Insulation Resistance: 10M (MIN) 100V DC

| | | |
|------|--|------|
| ④ | MOLDED TPE BLACK | / |
| ③ | LIGHTNING PLUG, (TERMINAL:GOLD PLATED, SHELL:NI-PLATED) | 1PCS |
| ② | USB 2.0 A TYPE 4Pin MALE, (TERMINAL: GOLD PLATED, SHELL: NI-PLATED) | 1PCS |
| ① | USB 2.0 CABLE [32AWG*2C+22AWG*1C+2E]+AB OD:3.1mm JACKET TPE WHITE | / |
| ITEM | MATERIALS LIST & SPEC. DESCRIPTION | Q'TY |