



HP Z27k G3 4K USB-C Display

Brand : HP

Product code: 1B9T0AT

Product name : Z27k G3 4K USB-C Display

Z27k G3 4K USB-C Display

HP Z27k G3 4K USB-C Display:

Exquisitely crafted for every detail

Meticulously crafted to surpass every design standard, the HP Z27k G3 4K USB-C® Display is composed of authentic aluminum and delivers an impressive, frameless viewing experience. Bring your ideas to life with remarkable color accuracy in precise 4K resolution. Refine your work experience and transform your PC into a powerhouse with this 68.6 cm (27") diagonal screen monitor with USB-C 100W Power Delivery. HP Z27k G3 4K USB-C Display. Display diagonal: 68.6 cm (27"), Display resolution: 3840 x 2160 pixels, HD type: 4K Ultra HD, Response time: 5 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in USB hub, USB hub version: 3.2 Gen 1 (3.1 Gen 1). VESA mounting, Height adjustment. Product colour: Silver




UHD 4K



Display		Ergonomics	
Display diagonal *	68.6 cm (27")	Height adjustment	15 cm
Display resolution *	3840 x 2160 pixels	Pivot	✓
HD type *	4K Ultra HD	Pivot angle	90 - 90°
Native aspect ratio *	16:9	Swivelling	✓
Panel type *	IPS	Swivel angle range	45 - 45°
Backlight type	Edge LED	Tilt adjustment	✓
Touchscreen *	✗	Tilt angle range	-5 - 20°
Display brightness (typical)	350 cd/m ²	On Screen Display (OSD)	✓
Response time *	5 ms	Power	
Anti-glare screen	✓	Energy efficiency class (SDR) *	G
Screen shape *	Flat	Power consumption (typical) *	42 W
Supported graphics resolutions	640 x 480 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1440 x 900 (WXGA+), 1600 x 1200 (UXGA), 1600 x 900, 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA), 2560 x 1440, 2560 x 1600 (WQXGA), 3840 x 2160	Power consumption (standby) *	0.5 W
		Power consumption (max)	165 W
		AC input voltage	100 - 240 V
		AC input frequency	50 - 60 Hz
		European Product Registry for Energy Labelling (EPREL) code	368163
Contrast ratio (typical) *	1000:1	Operational conditions	
Contrast ratio (dynamic)	10000000:1	Operating temperature (T-T)	5 - 35 °C
Maximum refresh rate *	60 Hz	Operating relative humidity (H-H)	20 - 80%
Viewing angle, horizontal	178°	Storage relative humidity (H-H)	5 - 95%
Viewing angle, vertical	178°	Weight & dimensions	
Pixel pitch	0.155 x 0.155 mm	Width (with stand)	612.3 mm
		Depth (with stand)	205 mm

Display		Weight & dimensions	
Pixel density	163 ppi	Height (with stand)	530.4 mm
Horizontal scan range	30 - 80 kHz	Weight (with stand)	6.2 kg
Vertical scan range	50 - 60 Hz	Width (without stand)	612.3 mm
Display diagonal (metric)	68.6 cm	Depth (without stand)	63.5 mm
Surface hardness	3H	Height (without stand)	356.1 mm
Colour depth	10 bit	Packaging data	
sRGB coverage (typical)	99%	Package width	698 mm
Performance		Package depth	423 mm
Flicker-free technology	✓	Package height	163 mm
HP segment	Business	Package weight	9.4 kg
Multimedia		Packaging content	
Built-in speaker(s) *	✗	Cables included	AC, DisplayPort, USB Type-C to USB Type-C
Built-in camera *	✗	Sustainability	
Design		Sustainable technologies and materials	Arsenic-free display glass; Low halogen; Mercury-free display backlights; TCO Certified; TCO Certified Edge
Market positioning *	Business	Other features	
Product colour *	Silver	Weight	6.2 kg
Detachable stand	✓	Height	356.1 mm
Ports & interfaces		Width	612.3 mm
Built-in USB hub *	✓	Depth	63.5 mm
USB hub version	3.2 Gen 1 (3.1 Gen 1)	Ethernet LAN (RJ-45) ports	1
USB upstream port type	USB Type-C	Certification	BIS; BSMI; CB; CCC; CE; CECP; CEL; cTUVus; EAC; ENERGY STAR®; ErP; FCC; GS Mark; ISO 9241-307; KC/KCC; NOM; PSB; SEPA; TCO Certified; TCO Certified Edge; TUV-S; VCCI; WEEE; ISC; Low blue light; Ukraine Energy label; WW application; UAE
Number of USB Type-C upstream ports quantity	1		
USB Type-A downstream ports quantity	4		
USB Type-C DisplayPort Alternate Mode	✓		
USB Power Delivery up to	100 W		
HDMI *	✓	Brand-specific features	
HDMI ports quantity	1	HP GTIN (EAN/UPC)	195122249441
HDMI version	2.0	Logistics data	
DisplayPorts quantity	2	Harmonized System (HS) code	85285210
DisplayPort version	1.4		
Ergonomics			
VESA mounting *	✓		
Panel mounting interface	100 x 100 mm		
Cable lock slot *	✓		
Height adjustment *	✓		

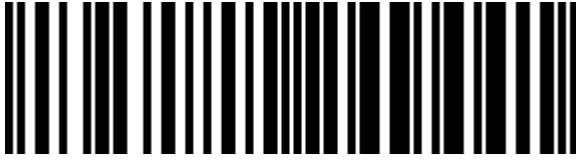

0195122249441



195122249441

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-NOV-2024. Prints or copies of Information are only valid on the printed Publication date