


Installation

24-Port Gigabit Ethernet Unmanaged Switch GS324

GS324



Step 1. Connect the equipment.

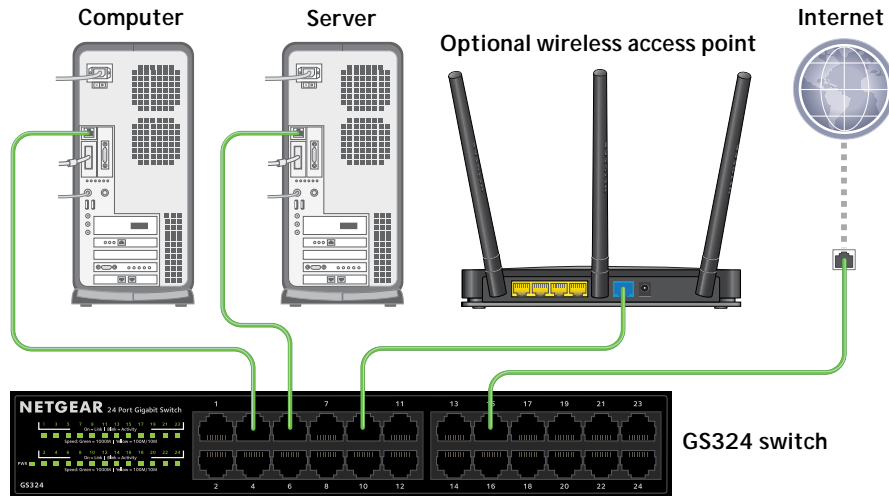


NETGEAR®

Step 2. Connect to power.



Step 3. Check the status.

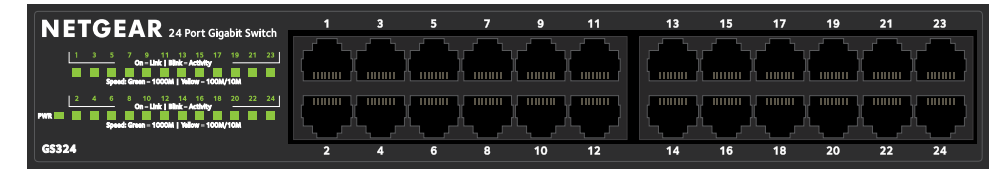

Power LED	Port Number LEDs (Link/Activity)	Port Speed LEDs
On	Link	1000 Mbps
Off	Activity (blinking)	100/10 Mbps.
	No link (off)	

Specifications

Specification	Description
Network interface	RJ-45 connector for 10BASE-T, 100BASE-TX, or 1000BASE-T
Network cable	Category 5 (Cat 5) or better Ethernet cable
Ports	24
Power	100–240VAC 50/60 Hz, 1.0A
Power consumption	11.1W max.
Weight	1.31 kg (2.90 lb.)
Dimensions (W x D x H)	252 x 180 x 44 mm 9.92 x 7.09 x 1.73 in
Operating temperature	0–40° C (32–104° F)
Operating humidity	10%–90% relative humidity, noncondensing

Support

Thank you for purchasing this NETGEAR product. You can visit www.netgear.com/support to register your product, get help, access the latest downloads and user manuals, and join our community. We recommend that you use only official NETGEAR support resources.

For the current EU Declaration of Conformity, visit http://support.netgear.com/app/answers/detail/a_id/11621/.

For regulatory compliance information, visit <http://www.netgear.com/about/regulatory/>.

See the regulatory compliance document before connecting the power supply.



201-19599-03

November 2015

NETGEAR, Inc.
350 East Plumeria Drive
San Jose, CA 95134, USA

© NETGEAR, Inc., NETGEAR and the NETGEAR Logo are trademarks of NETGEAR, Inc. Any non-NETGEAR trademarks are used for reference purposes only.