



P12

Pressure-optimised 120 mm Fan

- Optimised for static pressure
- Ideal choice on heatsinks, radiators and (partly-) covered case vents
- Push- or pull-configuration possible




P12

Pressure-optimised 120 mm Fan

The **P12** fan features completely redesigned fan blades and is optimised for high static pressure.

Thus, the **P12** is especially effective when used on heatsinks and with higher air resistance.




Specifications	
Fan	120 mm, 1800 RPM
Airflow	56.3 CFM/95.65 m ³ /h (@ 1 800 RPM)
Static Pressure	2.2 mm H ₂ O (@ 1 800 RPM)
Bearing	Fluid Dynamic Bearing
Noise Level	0.3 Sone (@ 1 800 RPM)
Voltage/Current	0.20 A/12 V DC
Connector	3-pin Connector
Dimensions	120 (L) x 120 (W) x 25 (H) mm
Weight	139 g

Optimised for Static Pressure

During the development of the new P12, special emphasis was placed on a focused airstream and thus a high static pressure. The fan guarantees extremely efficient cooling, even with increased air resistance.

Therefore, the P12 is particularly suitable for use on heatsinks and radiators.

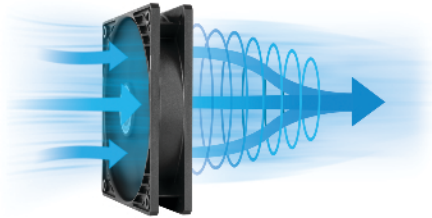

High Quality Bearing

Thanks to an alloy/lubricant combination developed in Germany, friction within the bearing is reduced and greater efficiency is achieved.

As a result, there is less heat development as well as less bearing noise, which means you can enjoy a longer service life from your fan.

