



## APC NetShelter Basic Rack PDU, 1U, 1PH, 3.7kW 230V 16A or 3.3kW 208V 16A, x12 C13 outlets, C20 cord

**Brand :** APC

**Product code:** AP9565

**Product name :** NetShelter Basic Rack PDU, 1U, 1PH, 3.7kW 230V 16A or 3.3kW 208V 16A, x12 C13 outlets, C20 cord



NetShelter Basic Rack PDU, 1U, 1PH, 3.7kW 230V 16A or 3.3kW 208V 16A, x12 C13 outlets, C20 cord


APC NetShelter Basic Rack PDU, 1U, 1PH, 3.7kW 230V 16A or 3.3kW 208V 16A, x12 C13 outlets, C20 cord:

Reliable rack power distribution designed to increase manageability and efficiency in the data center The output and input connections are (12)C13 Real-time remote monitoring of connected loads User-defined alarms warn IT and data center managers of potential circuit overloads to prevent accidental power loss to critical equipment.

APC NetShelter Basic Rack PDU, 1U, 1PH, 3.7kW 230V 16A or 3.3kW 208V 16A, x12 C13 outlets, C20 cord. PDU types: Basic, Rack capacity: 0U/1U, Type: Single-phase. AC outlets quantity: 12 AC outlet(s), AC outlet types: C13 coupler, Power plug: C20 coupler. Cable length: 2.5 m, Certification: cUL Listed,CE,CSA,GOST,Queensland Australia,UL 60950,UL Listed,VDE. Load capacity: 3680 VA, Maximum input current per phase: 16 A, Maximum power: 3680 W. Dimensions (WxDxH): 447 x 57.2 x 44.5 mm, Weight: 2.05 kg



Design		Power	
PDU types *	Basic	Load capacity	3680 VA
Type	Single-phase	Maximum input current per phase	16 A
Rack capacity *	0U/1U	Maximum power	3680 W
Mounting	Horizontal/Vertical	<b>Weight &amp; dimensions</b>	
Product colour	Black	Dimensions (WxDxH)	447 x 57.2 x 44.5 mm
<b>Ports &amp; interfaces</b>		Weight	2.05 kg
AC outlets quantity *	12 AC outlet(s)	<b>Packaging data</b>	
Power plug	C20 coupler	Package dimensions (WxDxH)	464 x 229 x 70 mm
AC outlet types *	C13 coupler	Package weight	3.64 kg
Input connection type	IEC-320 C20	<b>Operational conditions</b>	
Output connections	(12) IEC 320 C13	Operating temperature (T-T)	0 - 45 °C
<b>Features</b>		Storage temperature (T-T)	-25 - 65 °C
Cable length	2.5 m	Operating relative humidity (H-H)	0 - 95%
Certification	cUL Listed,CE,CSA,GOST,Queensland Australia,UL 60950,UL Listed,VDE	Storage relative humidity (H-H)	0 - 95%

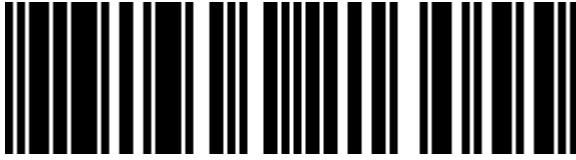

0731304213055



731304213055

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 21-NOV-2024. Prints or copies of Information are only valid on the printed Publication date