

# 4 x 4 / 8 x 8 HDMI Matrix Switch with Scaler

## VM5404H / VM5808H

- The VM5404H / VM5808H 4 x 4 / 8 x 8 HDMI Matrix Switch is a distinct HDMI solution that offers an easy and affordable way to route any of 4 / 8 HDMI video sources to any of 4 / 8 HDMI displays, with a quick view of all port connections via the front panel LCD.

The VM5404H / VM5808H includes seamless switching that employs a FPGA matrix architecture that ensures continuous video streams, real-time control and stable signal transmissions. With a built in high-performance scaler, the VM5404H / VM5808H easily converts various input resolutions into various output display resolutions, giving viewers the best video and picture quality across all displays. The switch integrates video wall functionality with an easy to use web GUI that lets you create 8/16 connection profiles that can be customized into different video wall layouts.

The VM5404H / VM5808H is an ideal solution for applications that require multiple HDMI displays with multiple HDMI sources to be conveniently setup in multiple locations, such as for stage presentations, competitions, control centers, and installations that require real-time reports.



VM5404H Front view



VM5808H Front view



VM5404H Rear view



VM5808H Rear view




## Features

- Connects any of 4 / 8 HDMI sources to any of 4/8 HDMI displays
- Features a built in high-performance scaler for the best image quality
- Seamless Switch™ – ATEN FPGA design unifies video formats to provide continuous video streams, real-time switching and stable signal transmissions
- Video Wall – allows you to create custom video wall layouts via intuitive web GUI
- EDID Expert™ – selects optimum EDID settings for smooth power-up and highest quality display
- Multiple Control Methods – system management via front-panel pushbuttons, IR, RS-232 and Ethernet (Telnet / Web GUI) connections
- View and control via ATEN Video Matrix Control App in a swift and agile way
- Supports Dolby True HD and DTS HD Master audio
- HDMI (3D, Deep color); HDCP 1.4 compatible
- Consumer Electronics Control (CEC) support
- ESD protection for HDMI
- Firmware Upgradeable
- Rack Mountable (1U design)

\* If Seamless Switching is enabled, the video output will not display 3D, Deep Color or interlace (i.e., 1080i) resolutions. To make these features available, you must disable Seamless Switching.

## Highlights

<b>Video Wall</b>	<p>The VM5404H/VM5808H is equipped with Video Wall functionality integrated through an easy to use web GUI. The video wall functionality provides up to 8/16 profiles that you can customize into layouts by setting the display outputs in accordance to your preference, designed from an easy to use web GUI. Through profile setup you can form a single large screen or a variation of multiple screens in different layouts – to see what you want, how you want it.</p>
<b>Scaler</b>	<p>The VM5404H/VM5808H is equipped with a high-performance scaling engine that converts various input resolutions into the display's native resolution, giving viewers the best picture and video quality. Low input resolutions are scaled perfectly to the best fit so that video playback is smooth and enjoyable. In addition, the premium scaling engine offers a range of aspect settings that automatically adjusts the picture ratio for maximum viewing comfort.</p>
<b>Smooth and Seamless Viewing Experience</b>	<p>The VM5404H/VM5808H's built-in FPGA design unifies video formats and provides continuous video streams, real-time switching and stable signal transmissions. It is capable of high-speed switching between all input/output ports – supporting TMDS high data transfer rates at up to 1080p / 1920 x 1200 @ 60 Hz to minimize latency.</p>

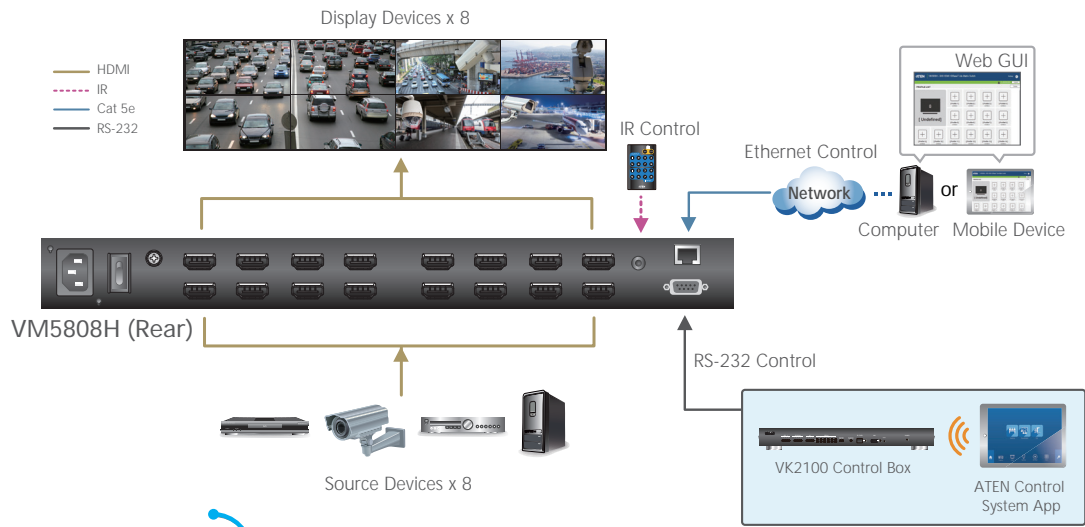

## Specifications

Function	VM5404H	VM5808H
<b>Video Input</b>		
Interfaces	4 x HDMI Type A Female (Black)	8 x HDMI Type A Female (Black)
Impedance	100 $\Omega$	
Max. Distance	1.8 m	
<b>Video Output</b>		
Interfaces	4 x HDMI Type A Female (Black)	8 x HDMI Type A Female (Black)
Impedance	100 $\Omega$	
Max. Distance	15 m	
<b>Video</b>		
Max. Data Rate	6.75 Gbps (2.25 Gbps Per Lane)	
Max. Pixel Clock	225 MHz	
Compliance	HDMI (3D, Deep Color)	
	HDCP 1.4 Compatible	
	Consumer Electronics Control (CEC)	
Max. Resolution	Up to 1080p	
Max. Distance	Up to 15 m	
<b>Control</b>		
RS-232	<b>Connector:</b> 1 x DB-9 Female (Black) <b>Baud Rate and Protocol:</b> Baud Rate: 19200, Data Bits: 8, Stop Bit: 1, Parity: No, Flow Control: No	
IR	1 x Mini Stereo Jack Female (Black)	
<b>EDID Settings</b>	EDID Mode: Default / Port1 / Remix / Customized	
<b>Power</b>		
Connectors	1 x 3-Prong AC Socket	
Maximum Input Power Rating	100 - 240 VAC; 50 - 60 Hz; 1.0 A	
Consumption	120 VAC, 36.6 W; 230 VAC, 37.5 W	120 VAC, 60 W; 230 VAC, 62 W
<b>Environmental</b>		
Operating Temperature	0° to 50° C	
Storage Temperature	-20° to 60° C	
Humidity	0 - 80% RH, Non-Condensing	
<b>Physical Properties</b>		
Housing	Metal	
Weight	4.10 kg	4.03 kg
Dimensions (L x W x H)	43.24 x 26.23 x 4.40 cm	43.24 x 26.23 x 4.40 cm

Product information is subject to change without prior notice.

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

Publish Date: 05/2020 V8.0



© Copyright 2020 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.