

AVOCENT® AV3000 SERIES KVM OVER IP SWITCHING SOLUTIONS



BENEFITS

Powerful User Access Control

- Grant access to specified users or implement LDAP directory authentication.
- Limit KVM access to specific targets on the switch.
- Enable smart card or CAC readers to support two factor authentication.

Streamlined Management

Virtual Media support allows servers to access storage media attached to the KVM, enabling out-of-band file transfers and OS patch deployments.

Local Port Access

Support for virtual media, USB keyboards and mice.

Single Solution

Support for USB, PS/2, Sun and serial target devices in a single solution.

Graphical, Multilingual OSD

Advanced, graphical On-Screen Display eases system configuration and server selection.

Space-Saving

CAT-5, thin cabling saves space in the rack and allows up to a 30 meter distance between the server and the switch.

Intelligent Cabling

Server interface modules and integrated access cables automatically assign and retain unique server names for each attached server.

Server Management for Small Data Centers and Remote/Branch Offices

Unplanned interruptions in service can have damaging effects on business no matter the scope or size of the data center. Whether the data center is in a closet, next to a desk or across the globe in a remote office, IT professionals need tools that provide consolidated, streamlined access to server resources. The Avocent® AV3000 series of KVM over IP switching solutions provides streamlined management and control of server resources all from a single console.

Flexible and Scalable

The Avocent AV3000 KVM over IP portfolio is available in two options to support different needs. The AV3108 switch supports one local and one remote user and up to eight server or serial devices. The AV3216 supports up to two local and one remote user and 16 server or serial devices.

When in share mode, additional, authenticated users can share remote sessions for a total of up to 4 remote, concurrent users. Each AutoView switch supports VGA, Display Port, DVI and HDMI video targets and four USB 2.0 ports for USB enabled devices. When additional systems are added, AutoView switches can be tiered to provide consolidated management of up to 256 server or serial devices.

Streamlined Management

The Avocent AV3000 series KVM over IP switch ships with two intuitive, integrated management interfaces. The OSCAR™ on-screen display for local access and the Web User Interface for remote management. Additionally, AV3000 series KVM over IP switches are compatible with Avocent DSView™ management software for consolidated management across the infrastructure.

Secure


In high security environments, CAC support with encryption for smart cards and password protection for local users, provides security you can depend on for your virtual media sessions. Encryption options include 128-bit SSL, AES, DES and 3DES and they can be selected for keyboard, mouse and video signals and virtual media sessions.



Avocent AV3108 and AV 3216 KVM switches are designed for local and remote management of server resources.

Product Specifications

	AV 3216	AV3108
Form Factor	1U rack mount	1U rack mount
Dimensions	Height: 1.72 inches (4.37cm) (1U)	Height: 1.72 inches (4.37cm) (1U)
	Width: 17 inches (43.2 cm)	Width: 17 inches (43.2 cm)
	Depth: 6.5 inches (16.5 cm)	Depth: 6.5 inches (16.5 cm)
Weight	4.4 lbs. (2.0 kg)	4.2 lbs. (1.9 kg)
Device Connectors	<ul style="list-style-type: none"> • 16 ports for servers or serial devices • 4 USB 2.0 ports 	<ul style="list-style-type: none"> • 8 ports for servers or serial devices • 4 USB 2.0 ports
Remote Access	1 remote KVM over IP user 10/100 Mbps Ethernet port	1 remote KVM over IP user 10/100 Mbps Ethernet port
Local Access	2 local ports	1 local port
	1 ACI port for tiering to another AutoView switch	1 ACI port for tiering to another AutoView switch
VM/CAC Support	Virtual Media support over USB Common Access Card (CAC) capability for smart cards 128-bit SSL, AES, DES and 3DES encryption	
Features Include	Agentless control and access for 1 remote user LDAP authentication Single-stack IPv4 or IPv6 access Flash-upgradeable firmware AV KVM Switch and AVRIO	
Video Support	Local VGA connection. Supports VGA, DisplayPort, HDMI, or DVI targets 16:9 widescreen, up to 1680 x 1050 4:3 standard, up to 1600 x 1200	
Management Software	OSCAR™ On-Screen Display for local access Web User Interface Compatible with Avocent DSView™ management software	
Power Supply Specifications	Connector: IEC C14 Type: Internal Power: 18W Heat dissipation: 47 BTU/hr AC input range: 100 - 240 VAC AC frequency: 50/60 Hz auto-sensing AC input current rating: 5 A AC input power (maximum): 20W	
Environmental	Operating: 32 to 122 degrees Fahrenheit (0 to 50 degrees Celsius) Non-operating: -4 to 158 degrees Fahrenheit (-20 to 70 degrees Celsius) Airflow is from non-port side (Front) to port side (Back)	
Supported Server Interface Adapters	Multi-platform support: PS/2 and USB. Also support for Avocent PS/2, PS2M, USB, Sun, USB2, VMC modules; Dell PS/2, USB, USB2-VM, USB2-VM+CAC SIPs	
Approved Agencies	UL, FCC Class A, cUL, ICES Class A, CE, EAC, VCCI Class A, KCC Class A, C-Tick, BSMI	
Warranty	Two Years	

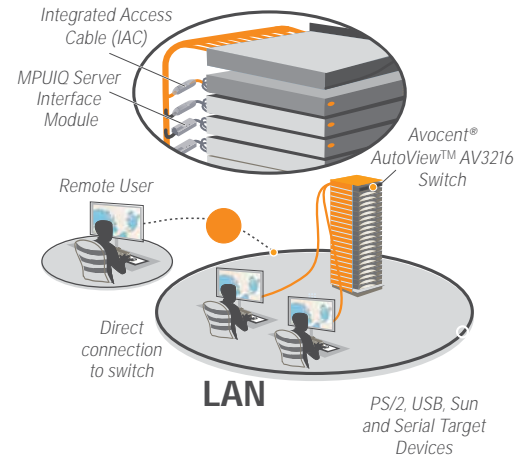

PART NUMBER	DESCRIPTION
AV3108-XXX	1x8 Cat-5 switch with USB, OSCAR™ graphical user interface OSD, virtual media and CAC support
AV3216-XXX	2x16 Cat-5 switch with USB, OSCAR™ graphical user interface OSD, virtual media and CAC support

SERVER INTERFACE MODULES	
MPUIQ-VMCHS	Server interface module for VGA, USB keyboard, mouse supporting virtual media, CAC and USB2.0.
MPUIQ-VMCHD	Server Interface Module for HDMI video, USB keyboard/mouse supporting virtual media, CAC and USB2.0.
MPUIQ-VMCDV	Server Interface Module for DVI video, USB keyboard/mouse supporting virtual media, CAC and USB2.0.
MPUIQ-VMCDP	Server Interface Module for DisplayPort video, USB keyboard/mouse supporting virtual media, CAC and USB2.0.
AVRIO-SRL	Server interface module for VT100 serial devices for extended distance (requires UPD-AM)
DSAVIQ-PS2M	Server interface module for VGA video, PS/2 keyboard & mouse with USB virtual media

CABLES	
PS2IAC-7	7 ft. PS2 CAT-5 integrated access cable
PS2IAC-10	10 ft. PS2 CAT-5 integrated access cable
PS2IAC-15	15 ft. PS2 CAT-5 integrated access cable
USBIAC-7	7 ft. USB CAT-5 integrated access cable
USBIAC-10	10 ft. USB CAT-5 integrated access cable
USBIAC-15	15 ft. USB CAT-5 integrated access cable

VertivCo.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2016 Vertiv Co. All rights reserved. Vertiv, the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.