

BENEFITS

- Remote access to KVM, USB and serial connections
- Serial adaptors support SSH connections
- Serial adaptors support the Cisco® pinout to make connections to Cisco equipment quick and easy
- Virtual media enables remote USB connections and support for smartcard/CAC readers
- Built-in Web interface for standalone applications or can be managed with the Avocent DSView™ 4 management software*
- Local and remote browser interface for easy setup and use
- FIPS 140-2 compliance: Based on the FIPS 140-2 validated cryptographic module(s) (Certificate #1051)

The Avocent® MergePoint Unity™ switch is the fourth-generation KVM over IP switch from Avocent solutions.

This switch provides IT administrators a complete remote management solution to access and control servers, networking equipment and other devices found in data centers and branch offices.

The Avocent MergePoint Unity switch enhances the in-band management typically done through the NIC of IT equipment by providing secure and remote out-of-band connections directly to the physical KVM, USB and serial ports. This unified approach enables IT administrators a faster method to diagnose, reconfigure or restore equipment to meet SLAs and minimize downtime.

Improve Remote Management and Staff Efficiency

- Reduce the time required to remotely diagnose/reconfigure/repair/restore servers as well as network devices and other hardware with serial configuration and/or management consoles.
- Complement in-band tools to create a more complete remote management solution to access servers and network equipment at remote locations.

- Virtual media enables remote USB connections to map CD-ROM and other USB mass storage devices directly to remote servers to transfer/copy files, load updates or install new applications, etc.

Integrated serial device support allows secure SSH connections to the physical serial ports of devices attached to the MPUIQ-SRL module. The Cisco® configuration settings electronically pin out the module to enable a fast and direct connection to Cisco configuration ports, without the need for any additional external wiring adapters or special wiring.

Improve Physical Security

- Remote smart card/CAC reader support is provided for advanced security requirements. Using the virtual media capabilities of the Avocent MergePoint Unity™ switch, a smart card reader can be mapped from a desktop PC out to a remote server.
- Reduce the need to physically enter the data centers for local access and control. The Avocent MergePoint Unity™ switch provides remote users the capabilities of a direct physical connection from anywhere to KVM, USB and serial ports of servers and other IT equipment.

Avocent® Solutions Can Help You Answer Questions Like:

- How can I access a remote server that is having an OS or network connectivity issue?
- If a server drops off the network, how can I quickly determine the cause and restore connectivity?
- How can I access a remote server to restart a service or stop a runaway process if my remote software tools cannot make a connection?
- How can I use smart card readers for computer authentication if I am using remote hardware such as digital KVM switches?
- When working on remote server OS or application issues, how can I transfer data or load a new application if the network connection on that device is down or unavailable?
- How can I access the configuration port of a network router or switch that is offline without having to take my laptop and a serial cable into the data center?



Avocent MergePoint Unity™ 32-port switch

SPECIFICATIONS

Mechanical

Size: HxWxD

1.72 in. (4.37 cm) H

17 in. (43.18 cm) W

16- or 32-port models: 13.38 in. (34 cm) D

4- or 8-port models: 9.2 in. (23.4 cm) D

Weight:

4- and 8-port single power: 6.3 lbs. (2.86 Kg)

8-port dual power: 6.8 lbs. (3.08 Kg)

16- and 32-port single power: 8.1 lbs. (3.67 Kg)

16- and 32-port dual power: 8.6 lbs. (3.9 Kg)

Ports/Connections

Network: Number: 2

Type: 10/100/1000 Ethernet

Power Control Ports: Number: 2

Type: RS232 serial

Connector: 8-pin modular

Device Ports: Number: 4, 8, 16 or 32

Connector: 8-pin modular

Local Console: Number: 1

Connector: USB and VGA

Supported Target Video: VGA, DVI-I,

Display Port and HDMI

Power Supply

Number: Single or dual power supplies

Type: Internal

AC input range: 100-240V

Video Resolution

Maximum local video resolution 1920x1080;
maximum remote resolution 1440x900


Standards

Approved Agency: UL, FCC, cUL, ICES-003,
CE, VCCI, KCC, C-Tick, GOST.

* MPU108 is EAC Approved

Warranty

Two Years

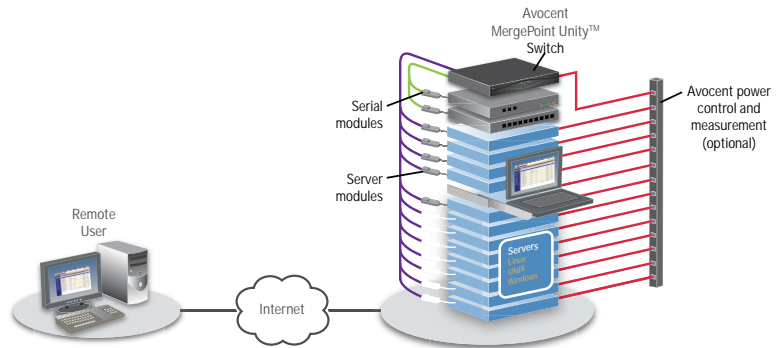

Ordering Details

PART NUMBER	DESCRIPTION
MPU108EDAC-001	8-port, 1 digital KVM path, dual AC power supply
MPU108EDAC-G01**	8-port, 1 digital KVM path, dual AC power supply
MPU1016DAC-001	16-port, 1 digital KVM path, dual AC power supply
MPU1016DAC-G01**	16-port, 1 digital KVM path, dual AC power supply
MPU2016DAC-001	16-port, 2 digital KVM paths, dual AC power supply
MPU2016DAC-G01**	16-port, 2 digital KVM paths, dual AC power supply
MPU2032DAC-001	32-port, 2 digital KVM paths, dual AC power supply
MPU2032DAC-G01**	32-port, 2 digital KVM paths, dual AC power supply
MPU4032DAC-001	32-port, 4 digital KVM paths, dual AC power supply
MPU4032DAC-G01**	32-port, 4 digital KVM paths, dual AC power supply
MPU8032DAC-001	32-port, 8 digital KVM paths, dual AC power supply
MPU8032DAC-G01**	32-port, 8 digital KVM paths, dual AC power supply

Cables and Accessories (One Required Per Attached Device)

MPUIQ-VMCDV	Server Interface Module for DVI video, USB keyboard/mouse supporting virtual media, CAC and USB2.0. Used with Avocent® MergePoint Unity™ switch.
MPUIQ-VMCDV-G01	Server Interface Module for DVI video, USB keyboard/mouse supporting virtual media, CAC and USB2.0. Used with Avocent MergePoint Unity switch. TAA
MPUIQ-VMCDP	Server Interface Module for DisplayPort video, USB keyboard/mouse supporting virtual media, CAC and USB2.0. Used with Avocent MergePoint Unity switch.
MPUIQ-VMCDP-G01	Server Interface Module for DisplayPort video, USB keyboard/mouse supporting virtual media, CAC and USB2.0. Used with Avocent MergePoint Unity switch. TAA compliant.
MPUIQ-VMCHD	Server Interface Module for HDMI video, USB keyboard/mouse supporting virtual media, CAC and USB2.0. Used with Avocent MergePoint Unity switch.
MPUIQ-VMCHD-G01	Server Interface Module for HDMI video, USB keyboard/mouse supporting virtual media, CAC and USB2.0. Used with Avocent MergePoint Unity switch. TAA compliant.
MPUIQ-SRL	Avocent MergePoint Unity serial IQ (requires power from USB source or optional UPD-AM)*
UPD-AM	Power supply for MPUIQ-SRL modules; each UPD-AM can power up to four serial interface modules
MPUIQ-VMCHS	Virtual media server interface module for VGA video and USB 2.0 with 14-inch cable
DSAVIQ-PS2M	Virtual media server interface module for VGA video, PS/2 keyboard and mouse and

Note: Legacy DSRIQs are also supported, please contact an Avocent sales representative for more information.

* For use with Avocent MergePoint Unity™ switches only

** TAA compliant

VertivCo.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2018 Vertiv Co. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.