


AXIS T91B47

Pole mount for different pole diameters

AXIS T91B47 Pole Mount is designed for both indoor and outdoor use. It is available in two versions with different lengths of marine-grade (SS316L) stainless steel straps. One version for poles with diameter between 50–150 mm (2–6 in), and one for poles with diameter between 100–410 mm (4–16 in) in diameter. Additionally, it can be used for attaching cameras to beams. When AXIS T91B47 is used for Axis fixed dome or fixed bullet cameras, no additional accessories such as pendant kits are required, ensuring a cost-efficient solution.

- > Suitable for a wide range of pole diameters
- > Safe and easy to install
- > IK10-rated vandal resistance
- > NEMA 4X-rated corrosion protection
- > Axis stainless steel (SS316L) straps included

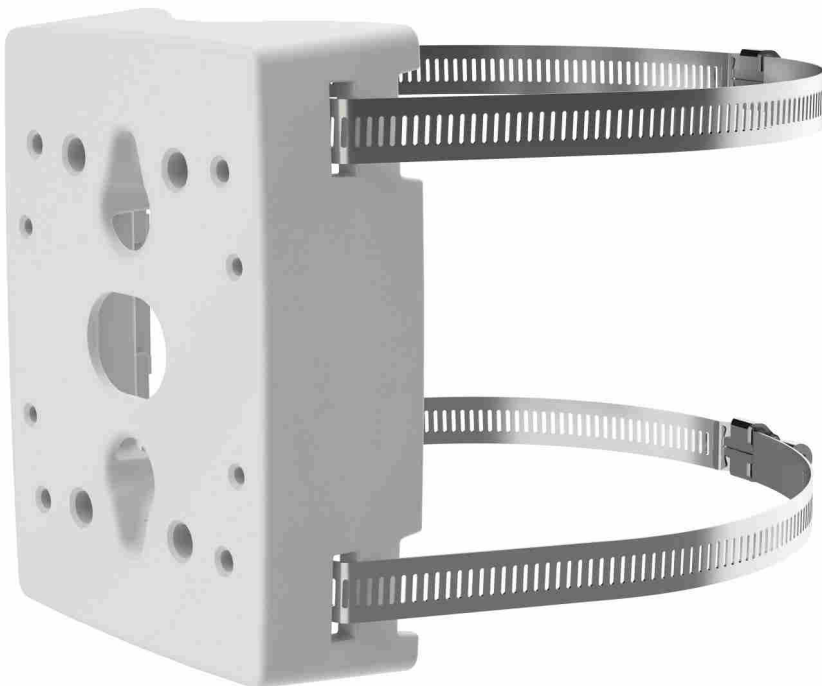

AXIS T91B47

Models	AXIS T91B47 Pole Mount 50–150 mm AXIS T91B47 Pole Mount 100–410 mm	Sustainability	PVC free
General		Environment	Indoor Outdoor
Supported products	Compatible Axis network cameras: Outdoor xed box cameras: AXIS M11/P13/Q16 Series Fixed bullet cameras: AXIS P14/Q17 Series Fixed dome cameras: AXIS M30/P32/P33/Q35/Q36 Series Thermal cameras: AXIS Q19/Q29 Series Compatible Axis accessories: AXIS T91E61 Wall Mount AXIS T94Q01A Wall Mount AXIS P33 Mounting Bracket AXIS T92E Housing Series AXIS T93F Housing Series AXIS T93G05 Protective Housing	Approvals	Safety IEC/EN/UL 60950-1, IEC/EN/UL 60950-22 Environment EN 50581, NEMA 250 Type 4X ^a Impact IEC 62262 IK10
Pole diameter	AXIS T91B47 Pole Mount 50–150 mm: 50–150 mm (2–6 in) AXIS T91B47 Pole Mount 100–410 mm: 100–410 mm (4–16 in)	Dimensions	111 x 42 x 147 mm (4 3/8 x 1 5/8 x 5 13/16 in)
Maximum load	15 kg (33 lb)	Weight	0.3 kg (0.7 lb) without steel straps
Cable routing	Back: Cable hole Side: U-shaped cable hole (26 mm/1 in)	Included accessories	Installation Guide Cable ties, Screws Stainless steel straps
Casing	NEMA 4X- and IK10-rated powder-coated aluminum mount Color: white NCS S 1002-B	Warranty	Axis 3-year warranty, see www.axis.com/warranty

a. *Corrosion protected only*

Environmental responsibility:

axis.com/environmental-responsibility