

Product Highlights

Full-Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology enables you to transfer files up to 10 times faster than with USB 2.0

No Installation Needed

Simply connect to an available USB Type-C or Thunderbolt 3 port and enjoy HDMI video in seconds



DUB-M420

4-in-1 USB-C Hub with HDMI/Power Delivery

Features

HDMI Compatibility


- Ultra HD video resolution up to 4K @ 30Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

USB Type-C with Simple Installation

- Two USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 60 W (20 V @ 3 A)
- Backwards compatible with USB 2.0 and USB 1.1 devices
- Simply plug it in and you're ready to go
- No additional hardware or software installation required

The DUB-M420 4-in-1 USB-C Hub with HDMI/Power Delivery allows you to instantly add a second display, two additional USB 3.0 ports, as well as one additional USB Type-C port to your ultraportable laptop or personal computer. Just plug the DUB-M420 into an available USB Type-C port and you're ready to connect to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 2 more USB devices, as well as sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.

Hardware Overview

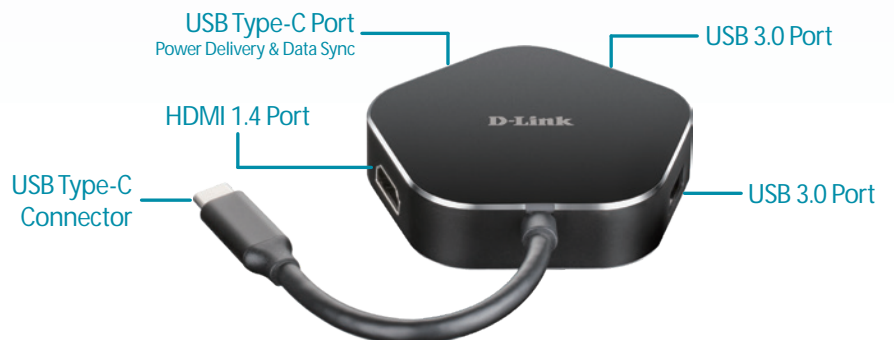

4-in-1 USB-C Hub with HDMI/Power Delivery

Technical Specifications		
Connectivity		
Device Interfaces	<ul style="list-style-type: none"> • Two USB 3.0 Type-A (female) ports • HDMI Port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz) backwards compatible to 1080p and 720p 	<ul style="list-style-type: none"> • One USB 3.0 Type-C port with data sync and power delivery of up to 60 W (20 V @ 3 A) • USB Type-C Connector (Thunderbolt 3 compliant)
Standards	<ul style="list-style-type: none"> • HDMI 1.4 • HDCP 2.2 • DisplayPort Alternate Mode 	<ul style="list-style-type: none"> • USB Specification Version 3.0 • USB Specification Version 2.0 • USB Specification Version 1.1
General		
Minimum System Requirements	<ul style="list-style-type: none"> • Computer running Microsoft Windows, Mac OS or Chrome OS 	<ul style="list-style-type: none"> • A USB Type-C Port with DisplayPort Alternate Mode support
Power Delivery	<ul style="list-style-type: none"> • USB Type-C port: 20 V @ 3 A 	
Physical		
Dimensions (W x H x D)	<ul style="list-style-type: none"> • 68 x 67 x 16 mm 	<ul style="list-style-type: none"> • Cable length: 11.5 cm
Weight	<ul style="list-style-type: none"> • 50.0 g 	
Power	<ul style="list-style-type: none"> • Input: Bus-powered 	<ul style="list-style-type: none"> • Consumption: 31 mA, 5 V DC
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 70 °C (32 to 158 °F) 	<ul style="list-style-type: none"> • Storage: -25 to 85 °C (-13 to 185 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 5% to 80% RH, non-condensing 	<ul style="list-style-type: none"> • Storage: 5% to 80% RH, non-condensing
Certifications	<ul style="list-style-type: none"> • CE • IC 	<ul style="list-style-type: none"> • FCC • RCM



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

Updated September 2019

D-Link[®]