

Product Highlights

Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer les up to 10 times faster than with USB 2.0

Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



DUB-M610

6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery

Features

High Fidelity Video Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

SD Card Compatibility

- · SD card & microSD card
- · SD, SDHC, SDXC (UHS-I mode)

Versatile and Convenient


- Two USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A)
- One USB 3.0 port supports Quick Charge BC1.2
- · Simply plug-and-play, no software required

Sturdy Aluminium Casing

· Strong aluminium alloy casing

The DUB-M610 6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery allows you to instantly add a second display, a SD card reader, and two additional USB 3.0 ports to your ultraportable computer. Just plug the DUB-M610 into an available USB Type-C port and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 2 more USB devices, as well as insert a microSD or regular SD card, giving you direct access to your full resolution photos stored on memory cards from your cameras. You can also sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.

Hardware Overview

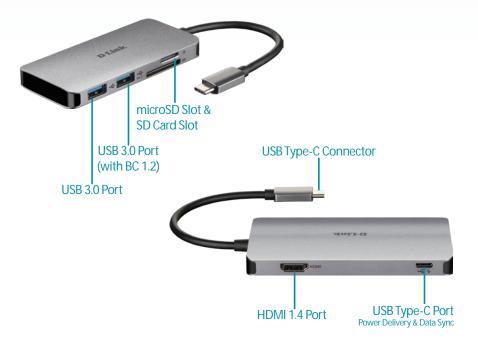

6-in-1 USB-C Hub with HDMI/Card Reader/Power Delivery Hardware Overview

Technical Speci cations Connectivity		
Standards	 USB Specification Version 3.0 USB Specification Version 2.0 USB Specification Version 1.1 Quick Charge BC 1.2 	SD, SDHC, SDXC (UHS-I mode)HDMI 1.4HDCP 2.2DisplayPort Alternate Mode
General		
Minimum System Requirements	Computer running Microsoft Windows, Mac OS, or Chrome OS	A USB Type-C Port with DisplayPort Alternate Mode support
Physical		
Dimensions (W x H x D)	• 95 x 45 x 11 mm (3.74 x 1.77 x 0.35 in)	Cable length: 15 cm (5.91 in)
Weight	• 68.0 g (2.40 oz)	
Power	Input: Bus-powered	Consumption: 80 mA, 5 V DC
Temperature	• Operating: 0 to 45 °C (32 to 113 °F)	• Storage: -10 to 70 °C (14 to 158 °F)
Humidity	Operating: 10% to 85% RH, non-condensing	Storage: 5% to 90% RH, non-condensing
Certifications	• CE • IC	• FCC • RCM



For more information: www.dlink.com

