

FDB 135MM SILENT FAN





Featuring whisper-quiet, fluid dynamic bearing 135mm fan provides high airflow with durability and longevity.

The Zero RPM fan mode further ensures a longer-lasting and quieter system by using thermal sensors to activate the fan

only when you need it.









100% TOP-GRADE JAPANESE CAPACITORS Achieve unprecedented tight voltage regulation & low ripple & noise to maximize your system's performance.





with a synchronous rectification based on a DC-DC topology.








circuit shield suite of industrial protections and is backed by a 10-year warranty.


This new PSU line from Antec pushes the standard for excellence with the

10-YEAR WARRANTY













25A

125W




(1)









25A










+5VSB

3.0A

15W



-12V

150 mm

PLATINUM

170 mm




1000W



5 x Molex

86 mm



your system's performance

Model

Type

Modular

Dimension

Input Voltage

Input Current

PFC

Input Frequency Range

Power Good Signal

Certifications

Connector


Net Weight

Gross Weight

Warranty

UPC#



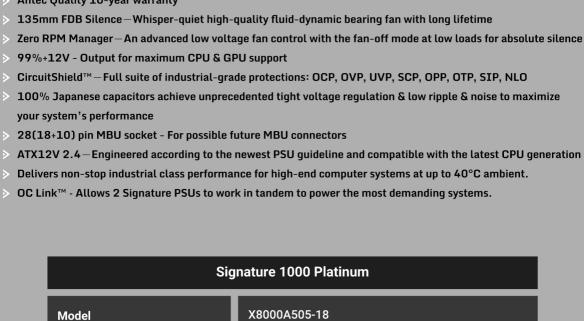

At 20%/50%/100% load AC 115V Internal, the power **Efficiency** efficiency should be at least 90%/92%/89% **Protection** OCP/OVP/UVP/SCP/OPP/OTP/SIP/NLO **Output Capacity** 1000W **Operation Temperature** 0~40°C Regulatory CB,CE,FCC,BSMI, TUV, cTUVus, 3C, RCM 135 x 135 x 25 (mm) FDB Silent Fan Fan

ATX

100-240

13A~6.5A

47Hz ~ 63Hz

PFC at half/full load:

>0.95 at AC 110v 60Hz(typical) >0.90 at AC 230v 50Hz(typical)

APFC

150 x 170 x 86mm (WLH)

1 x MB 24(20+4) Pin 2 x 8(4+4) Pin EPS 12V 8 x 8(6+2) Pin PCI-E

14 x SATA

5 x Molex

1 x FDD

2.11 Kgs

3.93 Kgs

80 Plus Platinum

10 Years 0-761345-11700-5 SP1000

0-761345-11701-2 SP1000 AU

0-761345-11702-9 SP1000 EC 0-761345-11703-6 SP1000 GB

0-761345-11704-3 SP1000 JP

Antec.