




SHINOBI 7

4K HDMI/SDI HDR Photo & Video Monitor

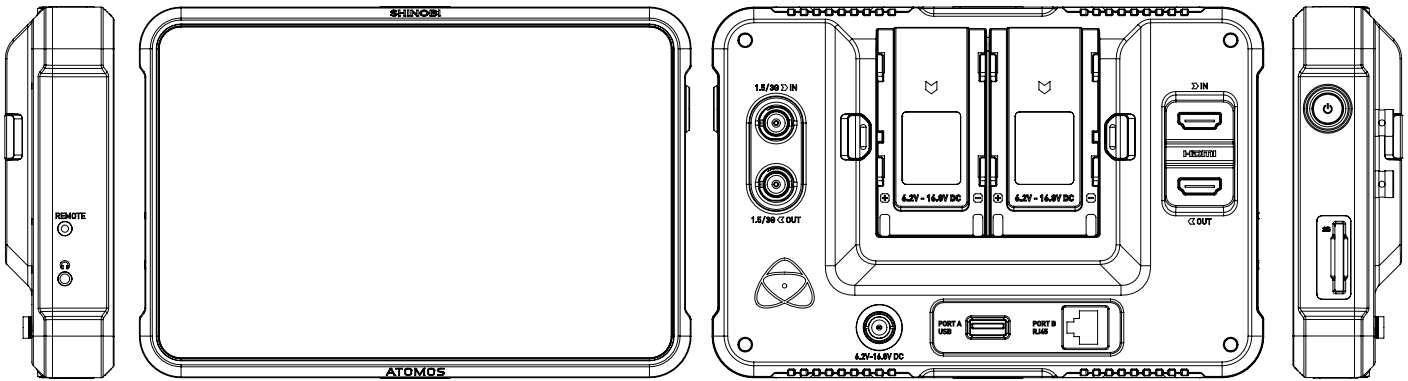

Key Features

- 2200nit HDR daylight viewable display
- HDMI 2.0 support for 4Kp60, 3G-SDI support up to 2Kp60
- Bi-directional HDMI < > SDI signal cross conversion
- Dual NPF battery slots for continuous power
- 3D LUT support with Preview and Loop Out
- AtomHDR provides Log to HDR conversion for Display and Loop Out
- Touchscreen Camera Control for compatible cameras via optional cable. Iris, WB, Shutter speed and ND.
- Exposure Tools - Histogram, Waveform, False Color & Zebra
- Vertical and Horizontal screen flip modes - enable the 'selfie' mode for easy piece to camera monitoring
- Pull focus with confidence using Zoom 4:1, 2:1, 1:1
- Headphone monitoring of camera audio

Big, Bright and Beautiful

Shinobi 7 combines a large 7" HDR screen with a calibrated peak brightness of 2200nits and the lightweight monitor-only functions of the original Shinobi. The Shinobi 7 can be used in the brightest of environments to monitor signals up to 4Kp60 via HDMI or SDI. An ideal directors' monitor, focus Pullers' monitor, program or preview display for video switchers, and perfect for vloggers presenting to camera.

Camera Controls at your Fingertips

Control camera functions with the intuitive touchscreen of the Shinobi 7, designed to give you fast access to the most crucial camera features. The optional Atomos USB-C to serial cable gives you direct control of all the menu configurations on Z CAM E2 series cameras, so that you can focus on the beautiful image and make dynamic adjustments of iris, white balance, shutter angle and ND.

HDR in the Field

Shinobi 7 screen displays a stunning 10+ stops of dynamic range in realtime from Log/PQ/HLG signals. Combined with our unique HDR monitoring features, the Shinobi 7 simplifies the complexities of shooting Log and HDR.

Built-in 3D LUT Box

In addition to Log to HDR conversions, you can also use your own custom LUTs to feed downstream or live feed. Load up to eight custom LUTs at any time via the SD Card Slot and instantly select between them, maintaining creative intent at all times.

The Best of AtomOS 10

Shinobi 7 utilizes the AtomOS 10 platform and is packed with an extensive suite of scopes and simple one-touch operations. Shinobi includes monitoring tools for Focus, Framing & Exposure, including Focus Peaking, 4:1 / 2:1 / 1:1 Zoom, Zebra, False Color, Cine and Social Frame Guides, SMPTE Safe Area, Waveform, RGB Parade, Vectorscope, Anamorphic De-squeeze.

Atomos 'Analysis' Mode

The Analysis feature allows you to see a waveform, histogram and vectorscope simultaneously whilst monitoring the image to ensure complete control of your image. You can even switch between different waveform, histogram and vectorscope options on the fly with a single touch

Continuous Power

Shinobi 7 is designed to optimize battery usage while monitoring, as the dual battery slots combine to allow you to run all day and easily hot-swap batteries. The dedicated locking DC jack input allows you to connect to mains power on-set and can also be used with the optional DC to D-Tap cable for power in-the-field from block batteries.

Pro I/O and Cross Conversion

With both HDMI and SDI for input or output, Shinobi 7 fits in to any production. With built-in cross conversion and 4K to HD down conversion you can easily bring HDMI cameras in to SDI workflows without the need for separate converters.

Factory and User Calibration

Factory calibrated for Rec.709, Shinobi 7 also supports user calibration with X-Rite's iDisplayPro/Plus and free Atomos Calibration software, which automates the calibration of the screen to ensure accurate and reliable HDR and Rec.709 monitoring.

Price

US\$699 ex. tax

SKU: ATOMSHB002 | UPC: 814164022576

Shinobi 7 - Technical specifications

Physical Specifications	
Weight (Monitor Only)	577g / 1.04lb (excluding batteries)
Dimensions (Monitor Only)	198mm x 133mm x 39mm
Mount Points	1 x Anti rotation 1/4" / 3/8 top and bottom
Construction	
Body	Polycarbonate ABS Plastic
Cooling	Actively controlled fan and heat sink
Multi-function Button	Power / lock screen
Power	
Input voltage (battery)	6.2V to 16.8V
Battery Voltage	7.2V
Operating Power	5.8-7.2V
Compatible Batteries	2 x NPF L series
Battery Run Time	5200mAh - up to 2hrs, 7800mAh - up to 3hrs
DC In	Locking DC jack
Continuous power	Dual battery slots
DTAP	Via optional DTap to DC cable
Display	
Touchscreen	SuperAtom IPS panel (capacitive touch)
Size	7"
Resolution	1920 x 1200
PPI	325
Bit Depth	10-bit (8+2 FRC)
Backlight	Edge lit
Brightness (cdm2 /Nits)	2200 +/- 10%
Aspect Ratio	17:9
Color Gamut	Rec.709
Calibration Support	Atomos Calibrator with Xrite i1 Display Pro / Plus (Retail)
Technology	
3D LUT Display	.Cube Format
3D LUT Down Stream	Loop out
3D LUT 50/50	Yes
Monitoring Modes	Native / HLG / PQ / 3D LUT
HDR Output Conversion	HLG / PQ
Gamma	Sony SLog / SLog2 / SLog3, Canon CLog / CLog2 / Clog3, Arri Log CEI160 / LogCEI200 / LogCEI250 / LogCEI320 / LogCEI400 / LogCEI500 / LogCEI640 / LogCEI800 / LogCEI1000 / LogCEI1280 / LogCEI1600, Panasonic Vlog, JVC JLog1, Red LogFilm / Log3G10 / Log3G12, FujiFilm Flog, PQ (HDR10), HLG, Nikon N-Log
Gamut	Bt2020, DCI P3, PDCI p3 65, Sony SGamut / SGamut3 / SGamut3.cine / Canon Cinema / DCI P3 / DCI P3+ / BT2020, Panasonic V Gamut, Arri Alexa Wide Gamut Rec709, JVC LS300, Red DragonColor / DragonColor2 / RedColor2 / RedColor3 / RedColor4 / RedWideGamut
Video Input	
HDMI	1 x HDMI (2.0) 4Kp60
SDI	1 x 3G SDI - 2k p60
Bit Depth	8 / 10-bit
Video Chroma Subsampling	YCbCr 420 & 422
Video Output	
HDMI	1 x HDMI (2.0) 4Kp60
SDI (Play Out)	1 x 3G SDI - 2Kp60
Video Signal Conversion	
HDMI to SDI	Yes
SDI to HDMI	Yes

Audio In/Out	
HDMI	2ch 24-bit, input dependent
SDI	8ch 24-bit, input dependent
Headphone out	3.5mm 2ch.
Timecode/SYNC	
Embedded	HDMI and SDI
Supported Codecs & Frame Rates (Record & Playback)	
Supported Resolution & FPS (Monitor Only)	4K DCI: HDMI: 23.98p, 24p, 25p, 29.97p, 50p, 59.94p 4K UHD: HDMI: 23.98p, 24p, 25p, 29.97p, 50p, 59.94p 2K DCI 2046 x 1080: SDI: 23.98p, 24p, 25p, 29.97p, 50p, 59.94p FHD 1920 x 1080 Progressive: HDMI and SDI : 23.98/24/25/29.9/30/50/59.94/60p FHD 1920 x 1080 Interlaced: 50/59.94/60i 1280 x 720p: 50/59.94/60p
Supported Media	
SD	SD Card slot for LUTs / Firmware
File System	ExFAT
On Screen Tools	
MultiScope Analysis View	Image, selectable Waveform, Histogram, Vector Scopes and Audio bars
Waveform	Yes, 3 size / Position
Histogram	Luma and RGB
RGB Parade	Yes, 3 size / Position
Vector Scope	Yes, 2 size / Position and zoom
Magnification	1 x Zoom 2 x Zoom 4x Zoom
Focus Peaking	Color selected / focus assist sharpening / threshold setting / color / Mono / edges only
False Color	Yes
Zebra	Yes, adjustable
Isolate Color Channel	Blue Only
Cine Frame Guides	2.4:1, 2.35:1, 1.9:1, 1.85:1, 4:3
Social Frame guides	9:16, 1:1, 19:1, 4:5
Safe Areas	Action and Graphic
Grid Markers	9 Grid
Anamorphic Desqueeze	1.25x 1.33x , 1.5x ,1.8x ,2x
Display Flip	Vertical and Horizontal selfie mode
Onboard Processing	
4K UHD Downscale for HD	Yes
DCI Crop	Yes
External Device Control	
Serial 2.5mm Jack	USB-C to Serial (ATOMCAB018)
USB	Camera control for supported cameras in future firmware release
RJ45	Camera control for supported cameras in future firmware release
What's in the box	
Accessories Included	Shinobi 7, International DC power adaptor and Quickstart guide
Optional Extras	Power kit, HDMI cables, USB to serial cable, AtomX Mounting Arm, Monitor mount
Warranty	
Standard	1 year. Extended to 3 years on product registration