

# HONEYWELL GRANIT™ XP ACCESSORIES GUIDE



**Honeywell**

# TABLE OF CONTENTS

- 3 Stands, Holders, Holsters, Misc
- 4 Access Points, Batteries, Charge and Communication Bases, and Chargers
- 5 Heaters
- 6 Cables
- 7 Power Supplies for Charge/Comm Bases
- 7 Power Supplies for Cabled Connections

# STANDS, HOLDERS, HOLSTERS, MISC



HOLDER-010-U

### Wall-Mount Cup

Holder Kit: Plastic bracket facilitates mounting of scanner to wall; two mounting screws included in kit.



HOLSTER-INDUSTRIAL

### Granit Holster

Securely holds Granit and Granit XP scanners, leaving hands free to accomplish tasks.



STND-30R00-011-4

### Rigid Presentation Stand

Stand: gray, 5" rigid rod, weighted base, Granit cradle.



STND-33F00-012-4

### Flexible Presentation Stand

Stand: gray, 9" flexible rod, weighted base, Granit cradle.



TOOLBAL

### Take-Up Reel/Tool Balancer

Suspension reel commonly used for scanner mounting/retention on vehicles and in fixed locations.



VMHOLDER2K

### Vehicle mount holder

Vehicle Mount Cup: Contains vehicle mount Granit scanner cup with 1 in. dia. ball joint attachment. Recommended use with VMHOLDER3K or VMHOLDER4K, not included.



VMHOLDER3K

### Vehicle mount holder

Vehicle mount kit: Contains adjustable arm with 1 in. dia. ball joints and circular mounting plate. Recommended use with VMHOLDER 2K cup (not included).



VMHOLDER4K

### Vehicle mount holder

Vehicle mount kit: Contains adjustable arm with 1 in. dia. ball joints and square post clamp base for posts up to 3 in. wide and 2.5 in thick. Recommended use with VMHOLDER 2K cup (not included).



1991IENDCAP

### Battery end cap

Cordless Granit XP end cap (battery door) for 1991i models.



199XILNYRDPLT

### Lanyard plate

Replacement metal lanyard plate for connection to tool balancer. Compatible with Granit XP 199Xi models. Pack of 1.



199XIORING

### Corded IP65/67 O-Ring

O-ring seal for IP65/67 sealing with Granit XP scanner cables. Pack of 10.

# ACCESS POINTS, BATTERIES, CHARGE AND COMMUNICATION BASES, AND CHARGERS



AP-100BT-07N

## Bluetooth Access Point

Access point for Granit XP scanners. Class 1 Bluetooth, 100m, up to 3 Granit XP scanners can be connected (cables sold separately).



AP-05-100BT-07N

## Bluetooth Access Point

Access point for Granit XP and Granit 198ii scanners. Class 1 Bluetooth, 100m, up to 3 Granit XP scanners can be connected (cables sold separately).



BAT-SCN05

## Smart Battery Pack

Battery: Lithium-ion battery for Granit XP and Xenon XP cordless scanners.



CCB22-100BT-03N

## Granit XP Charge/Communication Base

Base: Charge and communication. Class 1 Bluetooth. 100m (300'), up to 3 scanners can be connected. Compatible with RS232/USB/KBW cables (sold separately).



COB22

## Granit XP Charge Only Base

Base: Charge only. Only one scanner can be connected at a time. Power supply required and must be purchased separately.



MB4-BAT-SCN01XXD06<sup>1</sup>

## 4-Bay Battery Charger – Desk Mount

4-bay battery charger for use with Granit and Xenon Lithium-ion batteries, desktop power supply, two mounting screws (100006897), and instructions (MBC-INST).



MB4-BAT-SCN01XXW06<sup>1</sup>

## 4-Bay Battery Charger – Wall Mount

4-bay battery charger for use with Granit and Xenon lithium-ion batteries, wall-mount power supply, two mounting screws (100006897), and instructions (MBC-INST).

1. Indicates characters designating regional configuration

# HEATERS



520L-24-S3

## Scanner Heater with Cable Retractor

24V heater for Granit scanners in freezer environments.



520L-3648-S3

## Scanner Heater with Cable Retractor

36-48V heater for Granit scanners in freezer environments.



# CABLES

CBL-020-300-C00

## RS-232 Power Cable

Cable: RS232 (5V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

CBL-020-300-C00-01

## RS-232 Power Cable

Cable, Industrial (for freezer temps): RS-232 (5V signals), black, DB9 Female, 3m (9.8 ft), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

CBL-020-300-C00-02

## RS-232 Power Cable

Cable, Industrial (for freezer temps): RS-232 (5V signals), black, DB9 Female, 3m (9.8 ft), coiled, 5V external power with option for host power on pin 9, with ferrite.

CBL-020-500-C00

## RS-232 Power Cable

Cable: RS232 (+5V signals); black, DB9 female, 5m (16 ft), coiled, external power with option for host power on pin 9, w/o ferrite.

CBL-020-350-S00

## RS-232 Power Cable

Cable: RS-232 (5V signals), black, DB9 female, 3m (9.8'), straight, external power with option for host power on pin 9, w/o ferrite.

CBL-120-300-C00

## RS-232 Power Cable

Cable: RS-232 (+/-12V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

CBL-220-300-C00

## RS-232 Power Cable

Cable: RS-232 (5V signals), black, DB9 Male, 3m (9.8'), coiled, external power with option for host power on pin 9, Wincor Beetle.

CBL-320-300-C00

## RS-232 Power Cable

Cable: RS-232 (+/- 12V signals), black, DB9 Male, 3m (9.8'), coiled, external power with option for host power on pin 9, w/o ferrite.

CBL-500-300-C00

## USB Power Cable

Cable: USB, black, Type A, 3m (9.8'), coiled, 5V host power, w/o ferrite.

CBL-500-300-C00-07

## USB Power Cable

Cable: Industrial (for freezer environments)USB, black, Type A, 3m (9.8'), straight, 5V host power.

CBL-500-300-S00

## USB Power Cable

Cable: USB, black, Type A, 3m (9.8'), straight, 5V host power, w/o ferrite.

CBL-500-300-S00-01

## USB Power Cable

Cable, Industrial (for freezer environments) USB, black, Type A, 3m (9.8'), straight, 5V host power, w/o ferrite.

CBL-500-500-C00

## USB Power Cable

Cable: USB, black, Type A, 5m (16.4'), coiled, 5V host power, w/o ferrite.

CBL-501-300-S00

## USB Power Cable

Cable: USB Granit scanner cable, compatible with USB D9 connectors on VM series docks, w/o ferrite.

CBL-503-300-C00

## USB Power Cable

Cable: USB, black, 12V locking, 3m (9.8'), coiled, 5V host power, w/o ferrite.

CBL-503-300-S00

## USB Power Cable

Cable: USB, black, 12V locking, 3m (9.8'), straight, 5V host power, w/o ferrite.

CBL-503-500-C00

## USB Power Cable

Cable, USB, black, 12V locking, 5m (16.4'), coiled, 5V host power, w/o ferrite.

CBL-720-300-C00

## KBW Power Cable

Cable: KBW, black, PS2, 3m (9.8'), coiled, 5V external power with options for host power, w/o ferrite.

CBL-720-370-C00

## PS-2 Power Cable

Cable: USB, black, PS-2 Keyboard Wedge, 3.7 meter (11.3 ft) Coiled, 5V, w/o ferrite.

CBL-800-300-C00

## USB C Power Cable

Cable: USB C, 3m (9.8'), coiled, 5V host power, w/o ferrite.

CBL-801-370-C00

## RS-232 Talkman Power Cable

Cable, RS-232 (5V signals), black, Granit to Vocollect Talkman, 3.7m (12 ft), coiled, host 5V power only, w/o ferrite.

# POWER SUPPLIES FOR CHARGE/COMM BASES

PS-05-1000W-A-6

## NA CCB Power Supply

Power supply: Type A plug (NA), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

PS-05-1000W-C

## EU CCB Power Supply

Power supply: Type C plug (EU), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

PS-05-1000W-G


## UK CCB Power Supply

Power supply: Type G plug (UK), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

PS-05-1000W-I

## ANZ Power Supply

Power supply: Type I plug (ANZ, Argentina, China), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

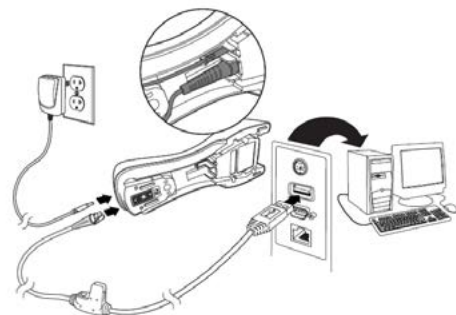

# POWER SUPPLIES FOR CABLED CONNECTIONS

46-00525-6

## Power Supply – NA Plug

Power Supply: Type A plug (NA), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

46-00526-6


## Power Supply – EU Plug

Power Supply: Type C plug (EU), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

46-00528

## Power Supply – ANZ Plug

Power Supply: Type I plug (ANZ, Argentina, China), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

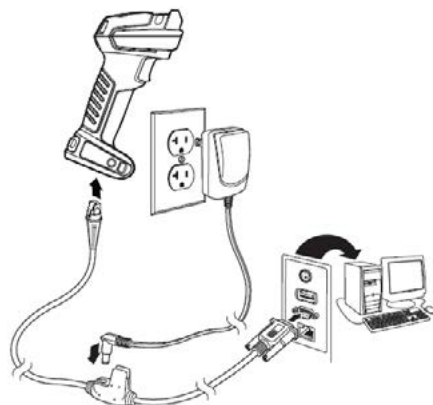

## For more information

[www.sps.honeywell.com](http://www.sps.honeywell.com)

## Honeywell Safety and Productivity Solutions

300 S Tryon St Suite 500  
Charlotte, NC 28202  
800-582-4263  
[www.honeywell.com](http://www.honeywell.com)