

SPECIFICATION SHEET

Product name: BWS-1D600-110 (WAX)




BWS-1D600-110 is a WAX thermal transfer ribbon for general use, designed for flat head printers. It is a state-of-the-art material with a “backcoating” layer developed to withstand three times more thermal impulse.

Applications

- Labelling in warehouse / shipments
- Traceability labelling
- Pharmaceutical leaflets


Supports

- Matte paper
- Couche paper / High gloss

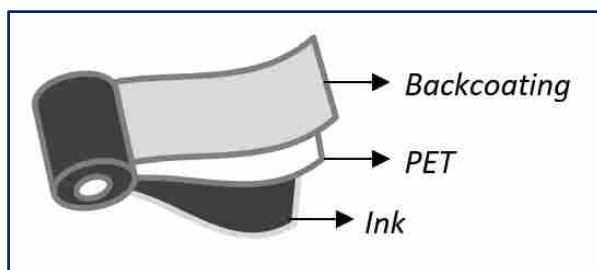


Backcoating

- Favours high-speed printing
- Protects the head from both friction and particle adhesion
- Treatment against static electricity

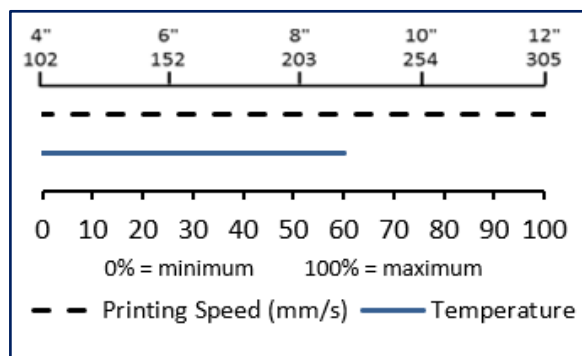

Ink

- Melting point (DSC): 65°C
- Thickness: $7.60 \pm 0.08 \mu\text{m}$

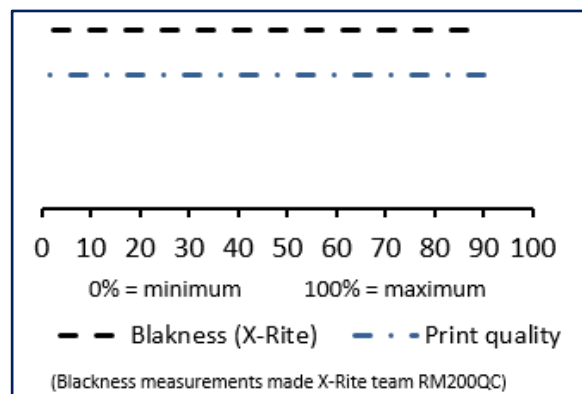


SPECIFICATION SHEET

Product name: BWS-1D600-110 (WAX)



Resistance (polypropylene, 203 mm/s)

Resistance tests conducted in Electronic Crockmeter M238BB textile M238CT (400 cycles for dry and wet wiping and 200 cycles for metal rubbing).

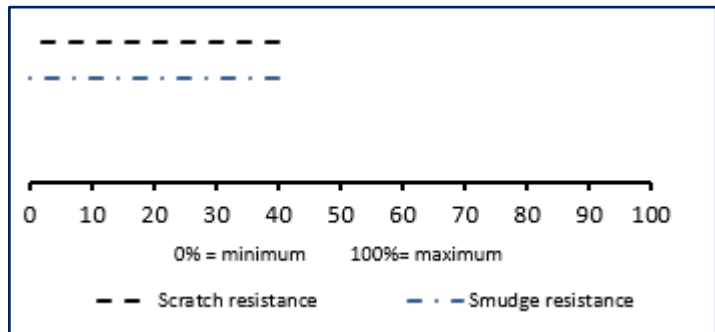

Certifications⁽¹⁾

- REACH/SVHC 1907/2006EC
850/2004
- RoHS: 2011/65/EC

(1) All certifications are pending update

Colour range

Black

Storage

- 5 ° C to 35 ° C
- 45% to 85% relative humidity
- Protect the products from sunlight

Expiration

1 year

NOTE: These specifications are only a guide. Due to the large number of surfaces, label finishes, varnishes and applications, Brother International Europe recommends that the printing tests be made for each specific case in your own environment. Effective July 2020.