

## **Product Highlights**

### True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without the need for installing a new network card simply by using any available USB Type-C port on your Windows and macOS computers, Chromebooks and iPad Pro

#### **Easy Expansion**

Easily add 4 x USB 3.0 ports to any laptop or computer with a spare USB-C port. Simply plug in, no need to install additional software

#### Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer les up to 10 times faster than with USB 2.0



## **DUB-2335**

# 6-in-1 USB-C Hub with HDMI/Gigabit Ethernet/Power Delivery

### **Features**

#### **High Fidelity Video Compatibility**

• Ultra HD video resolution up to 4K @ 30 Hz1

#### **Gigabit Ethernet Connectivity**


- · Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection with auto-negotiation to always use the highest available speed

## Versatile and Convenient

- Three USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 60 W (20 V @ 3 A)<sup>2</sup>
- · Simply plug-and-play, no software required
- · Compact design
- Compatible with Windows and macOS computers, Chromebooks and iPad Pro

The DUB-2335 6-in-1 USB-C Hub with HDMI/Gigabit Ethernet/Power Delivery instantly adds a second display, a Gigabit Ethernet port, three USB 3.0 ports, and a USB-C port with charging ability to your Windows and macOS computers, Chromebooks and iPad Pro. Just plug the DUB-2335 into an available USB-C port, and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to three USB devices and sync and charge one USB-C device, meaning that you don't have to give up that USB-C port this hub is connected to.

#### Hardware Overview

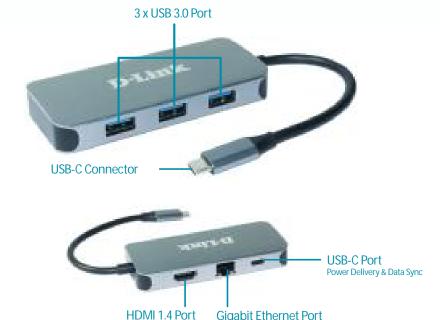

**Gigabit Ethernet Port** 

# 6-in-1 USB-C Hub with HDMI/Gigabit Ethernet/Power Delivery

Technical Speci cations		
Connectivity		
Interfaces	<ul><li>One USB Type-C connector</li><li>Three USB 3.0 Type-A ports</li><li>One USB Type-C/PD 3.0 port</li></ul>	<ul><li>One HDMI port</li><li>One RJ-45 Ethernet port (10/100/1000 Mbps)</li></ul>
LEDs	Power (per device)     Solid green - power is on	<ul> <li>Link (per Ethernet port)</li> <li>Solid green - Ethernet connection</li> <li>Speed (per Ethernet port)</li> <li>Flashing orange - data transmission</li> </ul>
General		
Standards	• USB 3.0 • USB 2.0 • USB 1.1 • IEEE 802.3 10Base-T	<ul><li>IEEE 802.3u 100Base-TX</li><li>IEEE 802.3ab 1000Base-T</li><li>Pause mode</li><li>Wake-on-LAN</li></ul>
Data rate	• Up to 5 Gbps	• Up to 1000 Mbps (Ethernet)
Resolution	• 4K @ 30 Hz	
System requirements	<ul> <li>Windows 7/8/8.1/10, macOS (OS X 10.8 and above)</li> <li>Chromebook, iPad Pro</li> </ul>	• USB Type-C port
Physical		
Dimensions (W x H x D)	• 103 x 45.5 x 15 mm	
Weight	• 80 g	
Power	From computer (USB bus powered)	
Supplied charging voltage/current	• 20 V / 3 A (PD 3.0)	
Temperature	Operating: 0 to 45 °C	• Storage: -10 to 70 °C
Humidity	Operating: up to 85% non-condensing	Storage: up to 85% non-condensing
Certifications	• CE	

<sup>1</sup> Please make sure that the USB Type-C port of your computer supports DP Alt (DisplayPort Alternate Mode).

2 Please make sure that the USB Type-C port of your laptop supports PD 3.0.





