


1U Solid/Vented Cantilever Shelf - 12/20 in. Depth

Product IDs

SHELF-1U-12-FIXED-S
SHELF-1U-12-FIXED-V
SHELF-1U-20-FIXED-S
SHELF-1U-20-FIXED-V

Product Diagrams

Front - Angled View

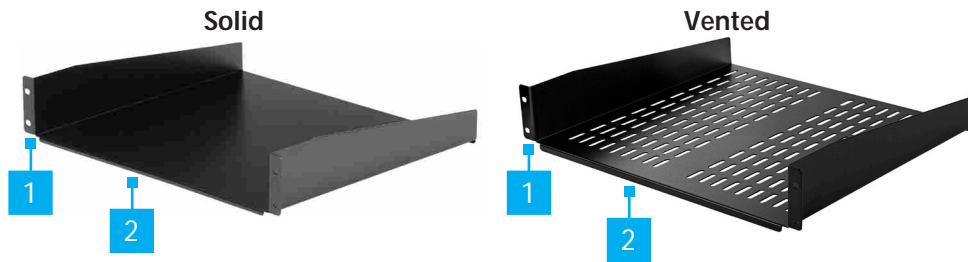

*Product may vary from images

| Component | Function |
|------------------|---|
| 1 Mounting Holes | • Mount the 1U Solid/Vented Shelf into a Rack or Cabinet . |
| 2 Shelf Lip | • Mount the 1U Solid/Vented Shelf with the Shelf Lip oriented downwards to prevent Equipment from catching during storage and/or retrieval |

Product Information

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/SHELF-1U-12-FIXED-S
www.StarTech.com/SHELF-1U-12-FIXED-V
www.StarTech.com/SHELF-1U-20-FIXED-S
www.StarTech.com/SHELF-1U-20-FIXED-V

Requirements

- 1U Available Rack Space

Warnings

- Read the entire manual and ensure the instructions are fully understood before assembling and/or using this product.
- Before adding equipment to this product, ensure this product has been properly mounted.
- Ensure the weight of the equipment does not exceed the weight capacity of this product. If the weight capacity is exceeded, personal injury or damage to the equipment are possibilities. This product can support the following weight: up to 55 lb. (25 kg). This product can only support the maximum weight capacity if 4 M6 Screws / Cage Nuts / Plastic Washers are used to attach this product to a rack or cabinet.

Package Contents

- 1U Solid/Vented Shelf x 1
- M6 Cage Nuts x 4
- M6 Screws x 4
- M6 Plastic Washers x 4
- Quick-Start Guide x 1

Installation

Mount the 1U Solid/Vented Shelf into a Rack or Cabinet

Use the included **M6 Cage Nuts**, **M6 Screws**, and **M6 Plastic Washers** to install the **1U Solid/Vented Shelf**.

Notes: This product can support the following weight: 55 lb. (25 kg).

The following installation instructions are for square mounting holes.

1. Locate a suitable location in a **Rack** or **Cabinet** to mount the **1U Solid/Vented Shelf**.

Note: The **1U Solid/Vented Shelf** itself requires **1U** of space within a **Rack** or **Cabinet**.

2. Insert the **Wing** (side) of an **M6 Cage Nut** into the back of the a **Cage Nut Hole**.
3. Insert the second **Wing** of the **M6 Cage Nut** into the selected **Cage Nut Hole**, using pressure by hand, or with a **Cage Nut Tool**.
4. Repeat steps 2 and 3 to insert a total of 4 **Cage Nuts**.

5. Thread an **M6 Plastic Washer** over an **M6 Screw**. Repeat until 4 **M6 Screw Assemblies** have been prepared.
6. Align the **Mounting Holes** in the **1U Solid/Vented Shelf** with the **M6 Cage Nuts** installed in steps 2-4.
7. Insert the **M6 Screw Assemblies** through the **Mounting Holes** in the **1U Solid/Vented Shelf** and into the **M6 Cage Nuts** and tighten, using a **Phillips Head Screwdriver**.

Regulatory Compliance

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

Warranty Information

This product is backed by a lifetime warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

StarTech.com Ltd.

45 Artisans Crescent
London, Ontario
N5V 5E9
Canada

StarTech.com LLP

4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.

Unit B, Pinnacle 15
Gowerton Road
Brackmills,
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.

Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp