

# 2-Port USB HDMI/Audio Cable KVM Switch

## CS692

The CS692 2-Port USB HDMI/Audio Cable KVM Switch links two HDMI-enabled PCs or devices to a single USB keyboard, USB mouse, and HD display console. The CS692 Switch takes a giant step forward from prior cable KVM models in the Petite series, by offering full HDMI functionality, USB 2.0 peripheral sharing (via a USB hub attached to the USB mouse port), and a firmware upgrade function that allows you to keep up with latest available versions.


Featuring an unbeatable combination of HDMI functionality, USB 2.0 peripheral sharing convenience, gaming keyboard support, and enhanced user-friendly operations, the CS692 allows users to keep up with the latest innovations in desktop multimedia applications.



### Features

- One KVM console controls two USB HDMI computers
- HDMI compatible: HDCP compatible
- Computer selection via remote port selector, hotkeys, and USB mouse
- Audio-enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Independent switching of the KVM and Audio focus – one computer has the KVM focus and the other the Audio focus<sup>1</sup>
- Multiplatform support – Windows, Mac, Linux
- Compact design, built-in all-in-one cables (2 x 1.2 m)
- Superior video quality – up to 1920 x 1200; 1080p
- Compatible with widescreen LCD monitors
- Video DynaSync™ – exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports
- Power on detection – if one computer is powered off, the CS692 will automatically switch to the other computer
- Supports gaming and multimedia keyboards
- Supports multifunction and wireless keyboards and mice
- Console mouse port emulation/bypass feature supports most mouse drivers and multifunction mice
- Mac keyboard support and emulation<sup>2</sup>
- USB 2.0 mouse port can be used for USB hub and USB peripheral sharing<sup>3</sup>
- Non-Powered
- Firmware upgradable

**Note:** 1. HD audio through the HD monitor's built-in speakers cannot be switched independently.  
 2. PC keyboard combinations emulate Mac keyboards. Mac keyboards work only with their own computers.  
 3. May require an additional power adapter.  
 To use the USB 2.0 mouse port as a USB hub, you must first disable mouse emulation mode.

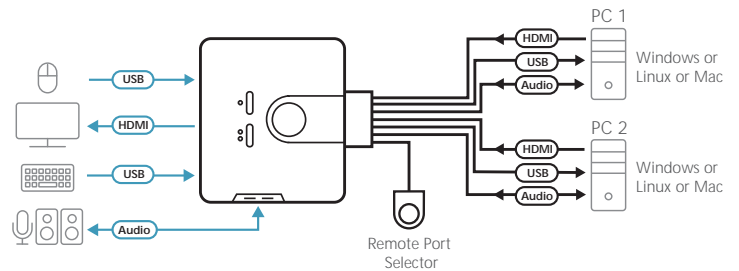

### Specifications

		CS692	
Computer Connections		2	
Port Selection		Remote Port Selector, Mouse, Hotkeys	
Connectors	Console Ports	Keyboard	1 x USB Type A Female (Silver)
		Video	1 x HDMI Type A Female (Black)
		Mouse	1 x USB Type A Female (Silver)
		Speakers	1 x 3.5mm Audio Jack Female (Green)
		Mic.	1 x 3.5mm Audio Jack Female (Pink)
	KVM Ports	Keyboard	2 x USB Type A Male (Purple)
		Video	2 x HDMI Type A Male (Black)
		Mouse	2 x USB Type A Male (Black)
		Speakers	2 x 3.5mm Audio Jack Male (Green)
		Mic.	2 x 3.5mm Audio Jack Male (Pink)
LEDs	KVM	2 (Green)	
Cable Length	KVM	2 x 1.2 m	
	Remote Port Selector	1.8 m	
Emulation	Keyboard / Mouse	USB	
Video		1920 x 1080 @ 60Hz; 1920 x 1200 @ 60Hz	
Scan Interval		3, 5, 10, 20 secs. (default 5 secs.)	
Power Consumption		DC5V: 0.72W; 8BTU	
Environmental	Operating Temp.	0-50°C	
	Storage Temp.	-20-60°C	
	Humidity	0-80% RH, Non-condensing	
Physical Properties	Housing	Plastic	
	Weight	0.48 kg	
	Dimensions (L x W x H)	8.24 x 6.65 x 2.52 cm	

\* Product specifications and appearance are subject to change without notice.

