

AXIS W701 Mk II Docking Station 8-bay

AXIS W701 Mk II Docking Station 8-bay enables easy handling of the body worn cameras with fast charging, quick, secure and easy data offloading.


- > **Grab and go, ready when you are**
- > **Dock and go, for automatic reliable offloading and fast charging**
- > **Reliable docking connectors**
- > **Splash proof**



AXIS W701 Mk II Docking Station 8-bay

Network		Supply chain	TAA compliant
Network protocols	IPv4, IPv6 USGv6, HTTPS, mDNS (Bonjour), DNS/DNSv6, NTP, TCP, UDP, ICMP, DHCPv4/v6, ARP	EMC	CISPR 35, CISPR 32 Class A, EN 55032 Class A, EN 55035, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(A)/NMB-3(A) Japan: VCCI Class A USA: FCC Part 15 Subpart B Class A
Throughput	100 Mbit/s (per camera)	Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1, RCM AS/NZS 62368.1:2022
General		Environment	IEC 60068-2-1, IEC 60068-2-14, IEC 60068-2-2, IEC 60068-2-78
Capacity	8 bays	Network	Compatible with NIST SP500-267 throughput
Casing	Plastic casing Color: black NCS S 9000-N	Sustainability	
Power	12 V DC, max 120 W	Substance control	PVC free RoHS in accordance with EU RoHS Directive 2011/65/EU and EN 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu
Connectors	Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T Power: DC input Pogo pin pads	Materials	Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to axis.com/about-axis/sustainability
Operating conditions	Temperature: 0 °C to 40 °C (32 °F to 104 °F) Humidity: 10–85% RH (non-condensing)	Environmental responsibility	axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org
Storage conditions	Temperature: -40 °C to 65 °C (-40 °F to 149 °F) Humidity: 10–85% RH (non-condensing)		
Dimensions	For the overall product dimensions, see the dimension drawing in this datasheet.		
Weight	860 g (1.90 lb)		
Box content	Docking station, power supply, screws, installation guide		
Warranty	3-year warranty, see axis.com/warranty		
Part numbers	Available at https://www.axis.com/products/axis-w701-mk-ii-docking-station-8-bay#part-numbers		
Approvals			
Product markings	UL/cUL, CE, KC, VCCI, RCM, NOM, WEEE, ICES, FCC		

Dimension drawing

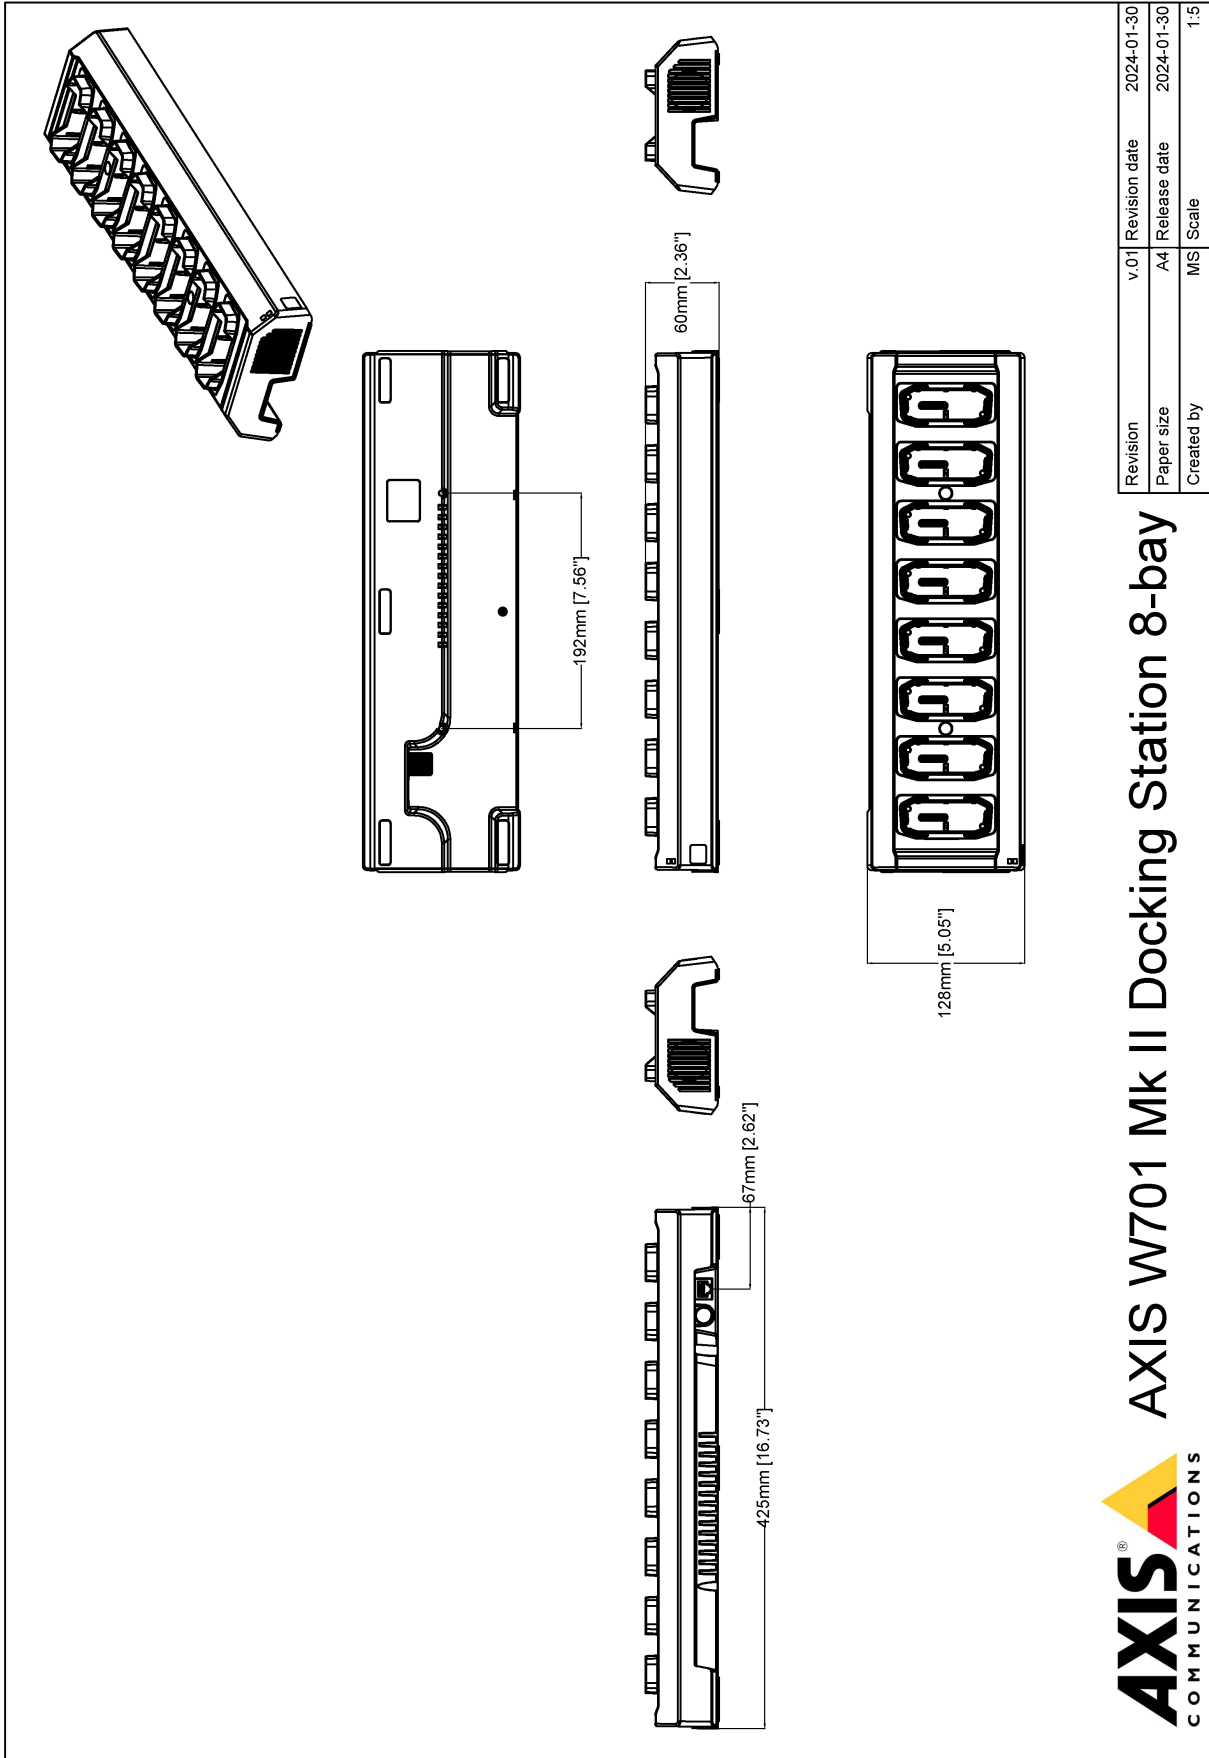

Revision	v.01	Revision date	2024-01-30
Paper size	A4	Release date	2024-01-30
Created by	MS	Scale	1:5

© 2024 Axis Communications

AXIS COMMUNICATIONS **AXIS W701 Mk II Docking Station 8-bay**

www.axis.com