



# LiteWave PoE Switches


Datasheet

**LiteWave Series**


Ideal for  
**Basic**  
Networks



LS105LP/LS105GP

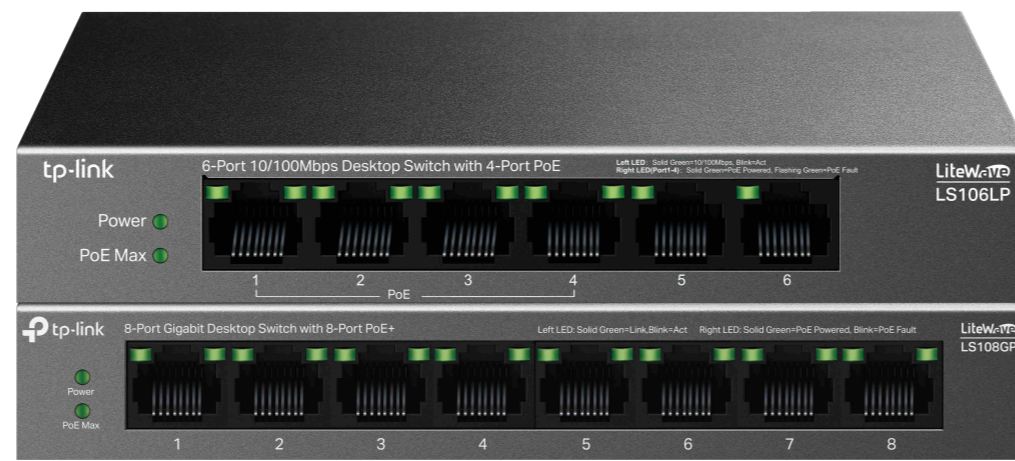

LS106LP/LS108GP

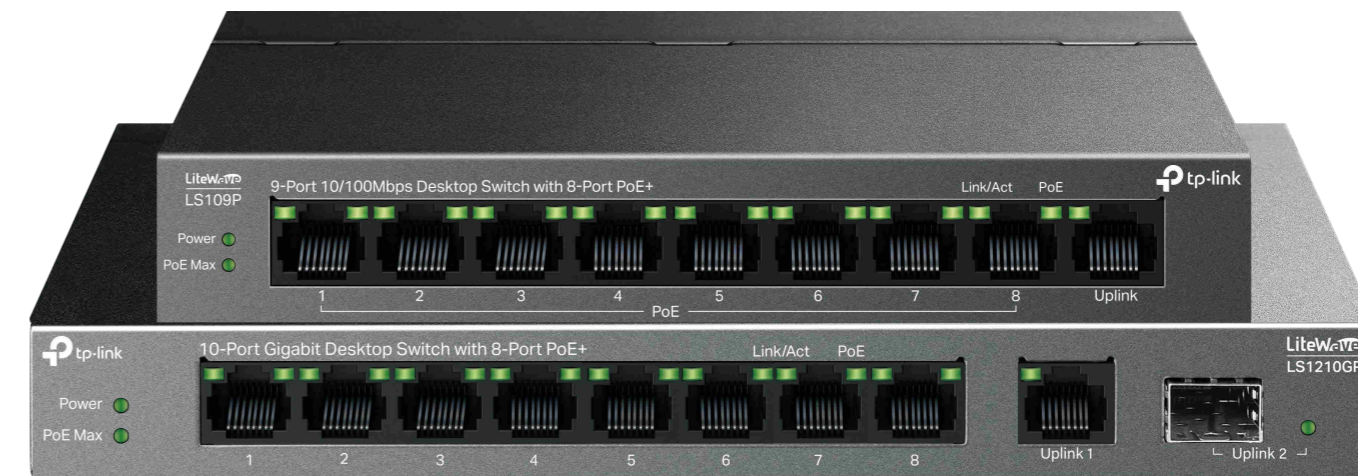

LS109P/LS1210GP

## Overview


The TP-Link LiteWave Series PoE Switches require no configuration and provide PoE (Power over Ethernet) ports. They can automatically detect and supply power with all IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network to where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.







## Highlights

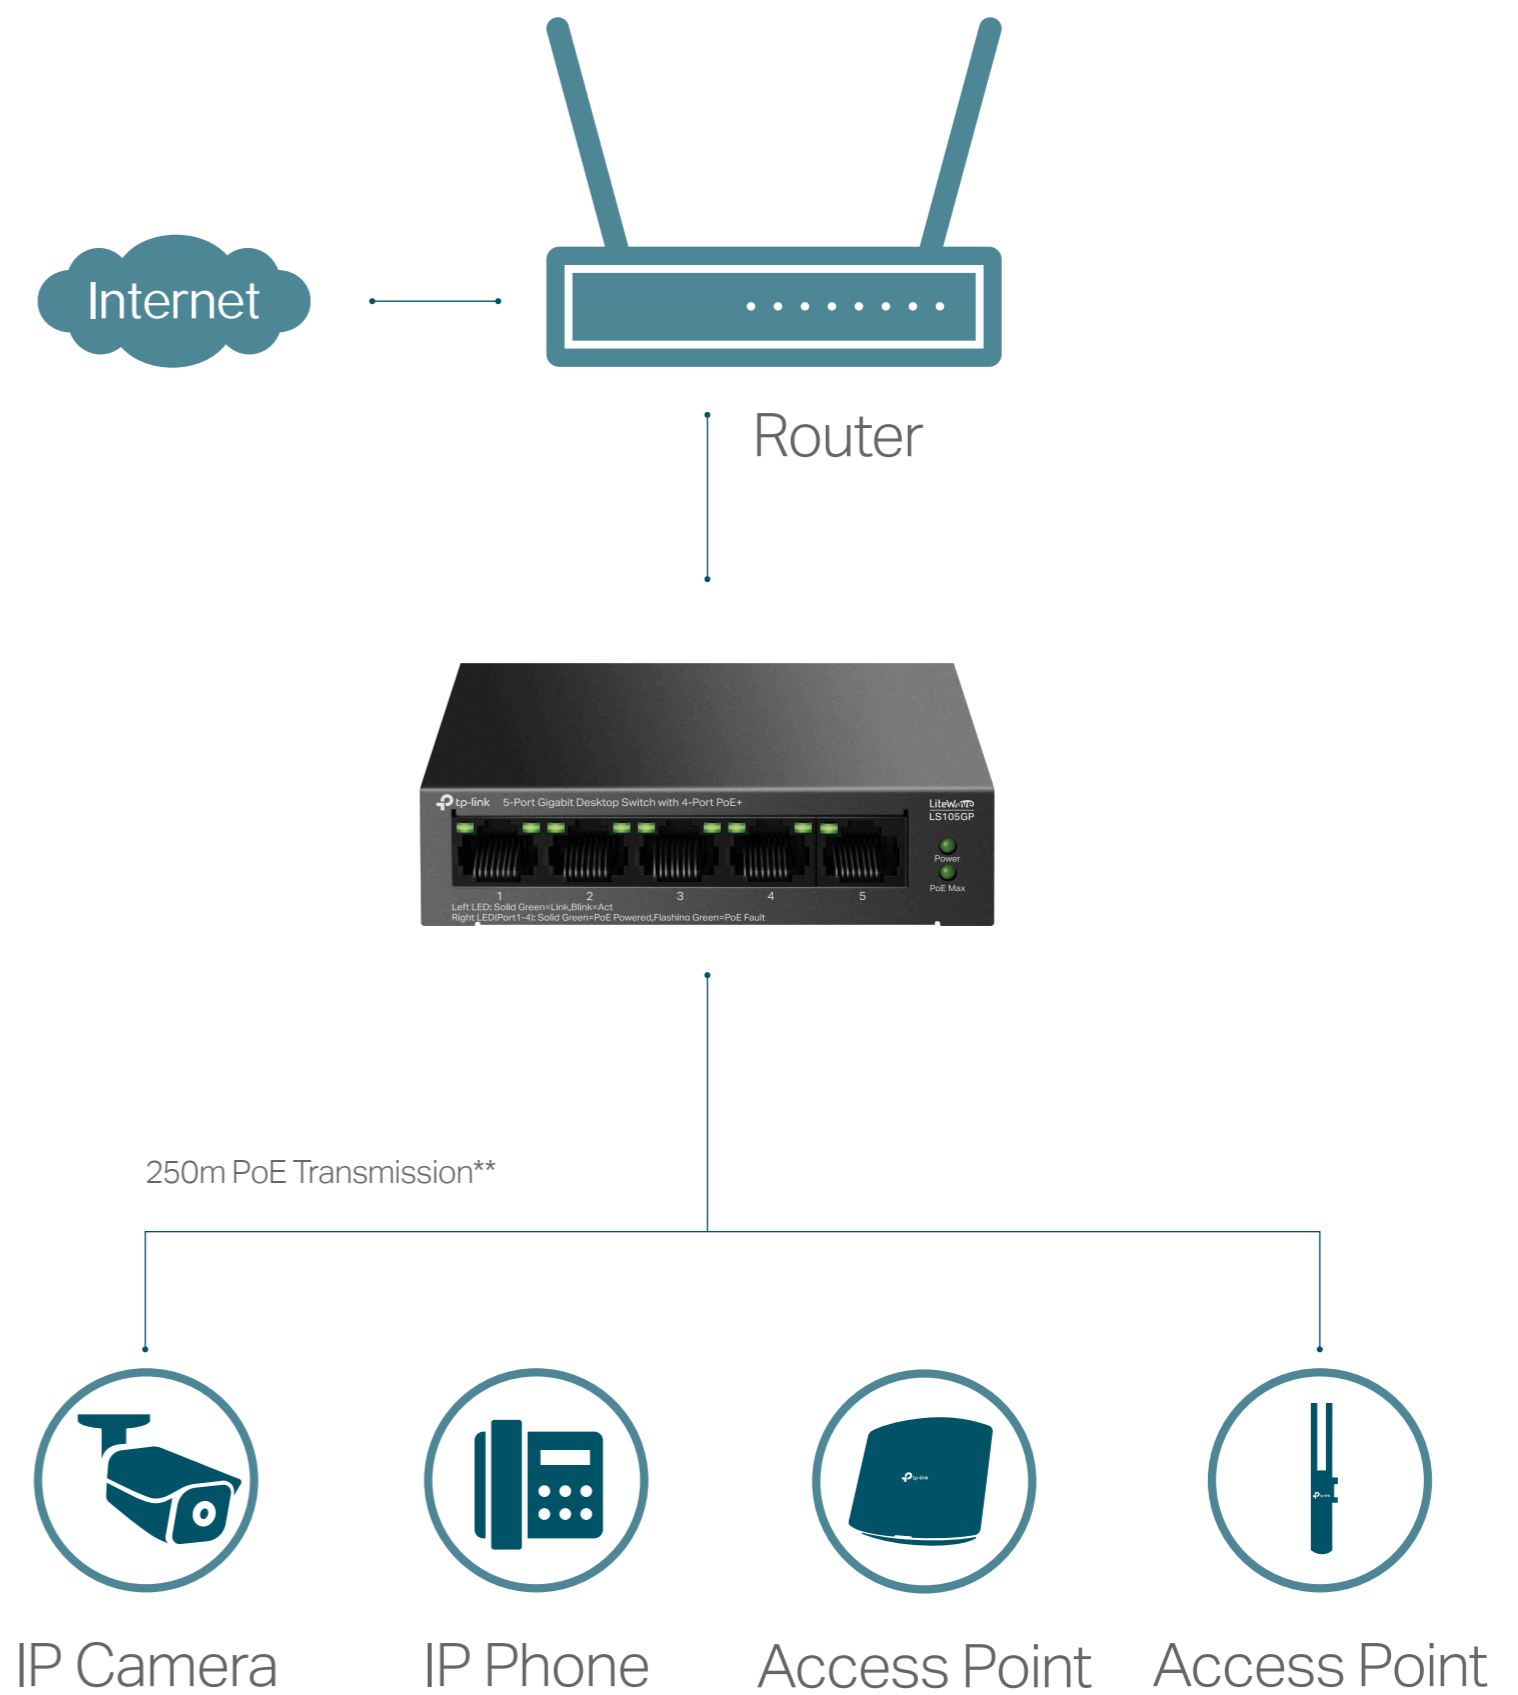- With multiple PoE ports, transfer data and power on one single cable
- Working with IEEE 802.3af /at compliant PDs, expand your network\*
- 802.1p/DSCP QoS enable smooth latency-sensitive traffic
- Up to 250 m data and power transmission under Extend Mode\*\* specially designed for surveillance system
- Isolation Mode (for LS109P&LS1210GP only) allows one-click client traffic separation for higher security and performance
- PoE Auto Recovery guarantees stable operation of PoE devices by automatically rebooting the dropped or unresponsive PD devices
- Plug and play, no configuration and installation required

## Network Diagram

Note: LS105GP is used for demonstration



Product Pictures								
Model		LS105LP	LS106LP	LS109P	LS105GP	LS108GP	LS1210GP	
Standards		IEEE802.3i, IEEE802.3u, IEEE802.3x, IEEE802.3af		IEEE802.3i, IEEE802.3u, IEEE802.3x, IEEE802.3af, IEEE802.3at	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at, IEEE 802.1p		IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at, IEEE 802.1p, IEEE 802.3z	
Interface		5 10/100 Mbps RJ45 Ports	6 10/100 Mbps RJ45 Ports	9 10/100 Mbps RJ45 Ports	5 10/100/1000 Mbps RJ45 Ports	8 10/100/1000 Mbps RJ45 Ports	9 10/100/1000 Mbps RJ45 Ports 1 1000 Mbps SFP port	
Network Media (Cable)		10BASE-T: UTP category 3, 4, 5 cable (maximum 100 m); EIA/TIA-568 100Ω STP (maximum 100 m) 100BASE-TX: UTP category 5, 5e cable (maximum 100 m); EIA/TIA-568 100Ω STP (maximum 100 m)			10BASE-T: UTP category 3, 4, 5 cable (maximum 100 m); EIA/TIA-568 100 Ω STP (maximum 100 m) 100BASE-TX: UTP category 5, 5e cable (maximum 100 m); EIA/TIA-568 100 Ω STP (maximum 100 m) 1000BASE-T: UTP category 5e cable or above (maximum 100 m); EIA/TIA-568 100 Ω STP (maximum 100 m)			
PoE	PoE Standard	PoE Standard: IEEE 802.3af		IEEE 802.3af, IEEE 802.3at				
	PoE Port	Port 1–4, up to 15.4 W per port		Port 1–8, up to 30 W per port	Port 1–4, up to 30 W per port	Port 1–8, up to 30 W per port		
	PoE Power Budget	41 W***		63 W***	65 W***	62 W***	61W***	
Auto Negotiation		Yes						
Auto MDI/MDIX		Yes						
Max Power Consumption		2.40 W (220 V/50 Hz no PD connected) 46.45 W (220 V/50 Hz with 41 W PD connected)	2.53 W (220 V/50 Hz no PD connected) 47.76 W (220 V/50 Hz with 41 W PD connected)	3.67 W (220 V/50 Hz no PD connected) 73.24 W (220 V/50 Hz with 63 W PD connected)	4 W (220 V/50 Hz no PD connected) 74.46 W (220 V/50 Hz with 65 W PD connected)	5.53 W (220 V/50 Hz no PD connected) 71.61 W (220 V/50 Hz with 62W PD connected)	7.3 W (220 V/50 Hz no PD connected) 76.96 W (220 V/50 Hz with 61 W PD connected)	
Max Heat Dissipation		8.15 BTU/h (220 V/50 Hz no PD connected) 157.93 BTU/h (220 V/50 Hz with 41 W PD connected)	8.61 BTU/h (220 V/50 Hz no PD connected) 162.38 BTU/h (220 V/50 Hz with 41 W PD connected)	12.48 BTU/h (220 V/50 Hz no PD connected) 249 BTU/h (220 V/50 Hz with 63 W PD connected)	13.6 BTU/h (220 V/50 Hz no PD connected) 253.16 BTU/h (220 V/50 Hz with 65 W PD connected)	18.81 BTU/h (220 V/50 Hz no PD connected) 243.47 BTU/h (220 V/50 Hz with 62W PD connected)	24.82 BTU/h (220 V/50 Hz no PD connected) 261.66 BTU/h (220 V/50 Hz with 61 W PD connected)	
Forwarding Mode		Store and Forward						
Switch Capacity		1 Gbps	1.2 Gbps	1.8 Gbps	10 Gbps	16 Gbps	20 Gbps	
MAC Address Table		2k, Auto-learning, Auto-aging				4k, Auto-learning, Auto-aging		
Extend Mode		YES (Ports 1-4)		YES (Ports 1-4/Ports 1-8)	YES (Ports 1-2)		YES (Ports 1-4)	
Isolation Mode		No		YES (Ports 1-8)	No		YES (Ports 1-8)	
PoE Auto Recovery		YES (Ports 1-4)	YES (Ports 1-4)	YES (Ports 1-8)	YES (Ports 1-4)	YES (Ports 1-8)		
Flow Control		Yes						
Fan Quantity		0						
LED		Power, Link/Act, PoE Status, PoE MAX						
Dimensions		3.9*3.9*1.0 in. (99.8 x 98 x 25 mm)	6.2*4.0*1.0 in. (158 x 101 x 25 mm)	6.7X3.9X1.1 in. (171 x 98 x 27 mm)	3.9*3.9*1.0 in. (99.8 x 98 x 25 mm)	6.2*3.9*1.0 in. (158 x 99 x 25 mm)	8.2*4.9*1.0 in. (209 x 126 x 26 mm)	
Certifications		CE, FCC, RoHS						

**Note:**

\* LS105LP and LS106LP only support IEEE 802.3af, and provide PoE Power up to 15.4W for each PoE port; other switches support IEEE 802.3af/at, and provide PoE Power up to 30W for each PoE port.

\*\* The speed of the ports which are under extend mode will be downgraded to 10Mbps. Actual transmission distance may vary from the quality of the cables.

\*\*\* PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.