

MDS.DEL

Delegate Microphone for Microphone discussion system



The MDS microphone discussion system is a highly flexible small to medium size tabletop discussion system. This easy to set up and to easy to use audio system is the perfect solution for meeting rooms, board rooms and medium conference rooms. This discussion system consists of a chairman unit (MDS.CHAIR) and up to 19 delegate units (MDS.DEL). The connection interface (MDS.INT) is located at the beginning of the microphone chain.

This MDS system has a unique circuit loop design with an easy set-up using standard CAT5 cables for linking up to 20 units in a daisy chain (every microphone and switching adaptor can be located anywhere in the loop).



When the chairman presses the mute button, only the chairman unit will be active and all delegates will be muted and deactivated. The delegates can press a button to talk into the flexible gooseneck microphone (no mute function).

The MDS.INT easily connects to any pre-amplifier or matrix with a MIC input with wide gain control (about +20dB of gain needed), allowing you to control the volume and/or use the record output for recording the meeting. Combined with the CMX20T ceiling speakers or MASK4 cabinet loudspeakers, you will have an astonishing voice clarity!

TECHNICAL SPECIFICATIONS

microphone type	unidirectional condensor	frequency response	80 Hz - 16 kHz
system interconnection	RJ45 - CAT5 cables, straight, according to EIA-568-B	maximum SPL	100 dB for 1% THD
dimensions (h x w x d) in mm	54 x 110 x 165	dimensions with mic (h x w x d) in mm	494 x 110 x 165
packing dimensions in mm	120 x 195 x 455	net weight in g	730
gross weight in g	950	Net weight product (kg)	0,73

MORE PICTURES

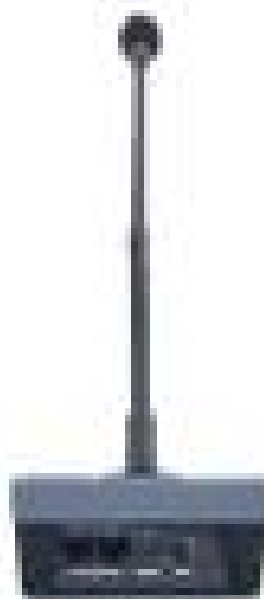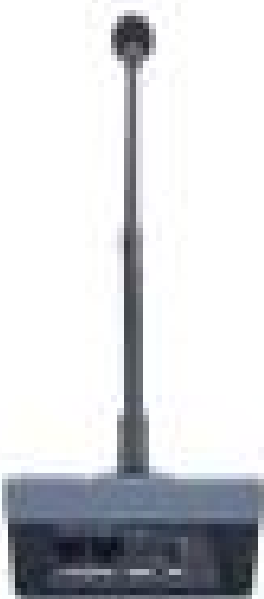



ACCESSORIES



MDS.INT

Interface and PSU for Microphone discussion system



MDS.CHAIR

Chairman Microphone for Microphone discussion system